


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AMPHENOL CABLES ON DEMAND. ANY REPRODUCTION OR DISCLOSURE TO THIRD PARTIES, IN PART OR WHOLE, WITHOUT THE EXPRESS WRITTEN PERMISSION OF AMPHENOL CABLES ON DEMAND IS PROHIBITED.

REV.	DESCRIPTION	DATE	APPROVED
A	NEW RELEASE	21/FEB/2012	
A1	Corrected the writing errors	20/Dec/2024	

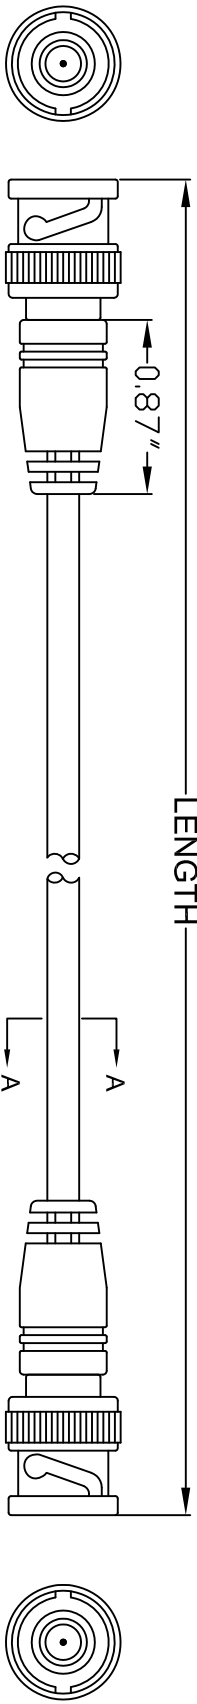


BNC M

BNC M

CABLE MARKING:
AWM E119932 STYLE 1354 80°C 30V
Amphenol Cables on Demand

- NOTES:
- CABLE:128AWG(7/0.127±0.01mm)]TC*1C+ BRAID(16*5/0.10±0.008mm)] TINNED COPPER INSULATION:PE OD= 1.6±0.10mm COLOR:TRANSPARENT JACKET:HALF MATTE PVC OD=Ø2.80±0.15mm COLOR:BLACK
 - CONNECTOR:BNC Male 75 OHM PIN GOLD FLASH, NICKEL PLATED SHELL
 - MOLDING SR:45Pa PVC BLACK
 - OPEN/SHORT MISS WIRE TEST 100%
 - CONDUCTOR RESISTANCE ≤237.25Ω/km
 - INSULATION RESISTANCE ≥2MΩ DC300V 0.01Sec



SECTION A-A

LENGTH	P/N
1FT(305±20mm)	AV-THLIN2BNCM-001
2.5FT(762±25mm)	AV-THLIN2BNCM-002.5
5FT(1524±30mm)	AV-THLIN2BNCM-005
7.5FT(2286±40mm)	AV-THLIN2BNCM-007.5
10FT(3048±50mm)	AV-THLIN2BNCM-010
15FT(4572±50mm)	AV-THLIN2BNCM-015
25FT(7620±100mm)	AV-THLIN2BNCM-025

PIN OUT:

CENTER	CENTER
SHELL	SHELL



NOTES: UNLESS OTHERWISE SPECIFIED

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:			APPROVALS			Amphenol Cables on Demand 20 VALLEY ST. ENDICOTT, NY 13760		
DENOM.	ANGLES		DRAWN	DATE		SIZE	DWG. NO.	REV.
X	±X°	±X°	LF	21/FEB/2012		A	AV-THLIN2BNCM-XXX	A1
XX	±XX		CHECKED	21/FEB/2012				
XXX	±XXX		BA					
THIRD ANGLE PROJECTION			RESP ENG					
			MFG ENG					
CDO FILE								