

# Dual Series Schottky Barrier Diodes

## BAT54CT

These Schottky barrier diodes are designed for high speed switching applications, circuit protection, and voltage clamping. Extremely low forward voltage reduces conduction loss. Miniature surface mount package is excellent for hand held and portable applications where space is limited.

### Features

- Extremely Fast Switching Speed
- Low Forward Voltage – 0.35 Volts (Typ) @  $I_F = 10 \text{ mAdc}$
- S Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant

### MAXIMUM RATINGS ( $T_J = 125^\circ\text{C}$ unless otherwise noted)

| Rating                                                                                     | Symbol          | Value       | Unit                       |
|--------------------------------------------------------------------------------------------|-----------------|-------------|----------------------------|
| Reverse Voltage                                                                            | $V_R$           | 30          | V                          |
| Forward Power Dissipation<br>@ $T_A = 25^\circ\text{C}$<br>Derate above $25^\circ\text{C}$ | $P_F$           | 225<br>2.25 | mW<br>mW/ $^\circ\text{C}$ |
| Thermal Resistance,<br>Junction-to-Ambient (Note 1)                                        | $R_{\theta JA}$ | 555         | $^\circ\text{C/W}$         |
| Forward Current (DC)                                                                       | $I_F$           | 200 Max     | mA                         |
| Non-Repetitive Peak Forward Current,<br>$t_p < 10 \text{ msec}$                            | $I_{FSM}$       | 600         | mA                         |
| Repetitive Peak Forward Current<br>Pulse Wave = 1 sec,<br>Duty Cycle = 66%                 | $I_{FRM}$       | 300         | mA                         |
| Junction Temperature                                                                       | $T_J$           | -55 to 125  | $^\circ\text{C}$           |
| Storage Temperature Range                                                                  | $T_{stg}$       | -55 to +150 | $^\circ\text{C}$           |


Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. FR-4 board with minimum mounting pad.


## 30 VOLT DUAL COMMON CATHODE SCHOTTKY BARRIER DIODES



SC-75  
CASE 463  
STYLE 3



### MARKING DIAGRAM



5C = Device Code  
M = Date Code\*  
■ = Pb-Free Package

(Note: Microdot may be in either location)

\*Date Code orientation may vary depending upon manufacturing location.

### ORDERING INFORMATION

| Device      | Package            | Shipping†           |
|-------------|--------------------|---------------------|
| BAT54CTT1G  | SC-75<br>(Pb-Free) | 3,000 / Tape & Reel |
| SBAT54CTT1G | SC-75<br>(Pb-Free) | 3,000 / Tape & Reel |


†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

# BAT54CT

## ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ unless otherwise noted) (EACH DIODE)

| Characteristic                                                                                                                                                      | Symbol      | Min                   | Typ                                  | Max                                  | Unit               |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-----------------------|--------------------------------------|--------------------------------------|--------------------|
| Reverse Breakdown Voltage<br>( $I_R = 10\ \mu\text{A}$ )                                                                                                            | $V_{(BR)R}$ | 30                    | –                                    | –                                    | V                  |
| Total Capacitance<br>( $V_R = 1.0\ \text{V}$ , $f = 1.0\ \text{MHz}$ )                                                                                              | $C_T$       | –                     | 7.6                                  | 10                                   | pF                 |
| Reverse Leakage<br>( $V_R = 25\ \text{V}$ )                                                                                                                         | $I_R$       | –                     | 0.5                                  | 2.0                                  | $\mu\text{A}_{dc}$ |
| Forward Voltage<br>( $I_F = 0.1\ \text{mA}$ )<br>( $I_F = 1.0\ \text{mA}$ )<br>( $I_F = 10\ \text{mA}$ )<br>( $I_F = 30\ \text{mA}$ )<br>( $I_F = 100\ \text{mA}$ ) | $V_F$       | –<br>–<br>–<br>–<br>– | 0.22<br>0.29<br>0.35<br>0.41<br>0.52 | 0.24<br>0.32<br>0.40<br>0.50<br>0.80 | V                  |
| Reverse Recovery Time<br>( $I_F = I_R = 10\ \text{mA}_{dc}$ , $I_{R(REC)} = 1.0\ \text{mA}_{dc}$ , Figure 1)                                                        | $t_{rr}$    | –                     | –                                    | 5.0                                  | ns                 |


Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

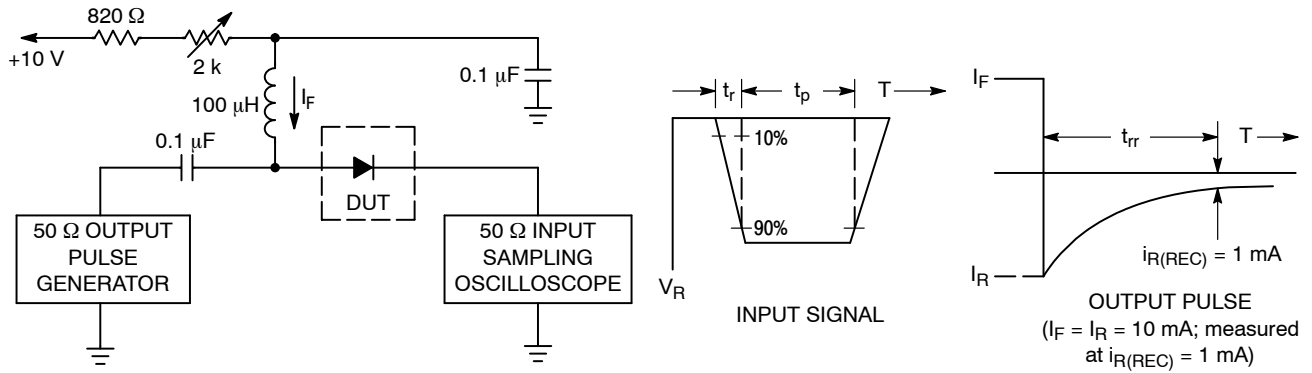


- Notes: 1. A 2.0 kΩ variable resistor adjusted for a Forward Current ( $I_F$ ) of 10 mA.  
2. Input pulse is adjusted so  $I_{R(\text{peak})}$  is equal to 10 mA.  
3.  $t_p \gg t_{rr}$

**Figure 1. Recovery Time Equivalent Test Circuit**


# BAT54CT

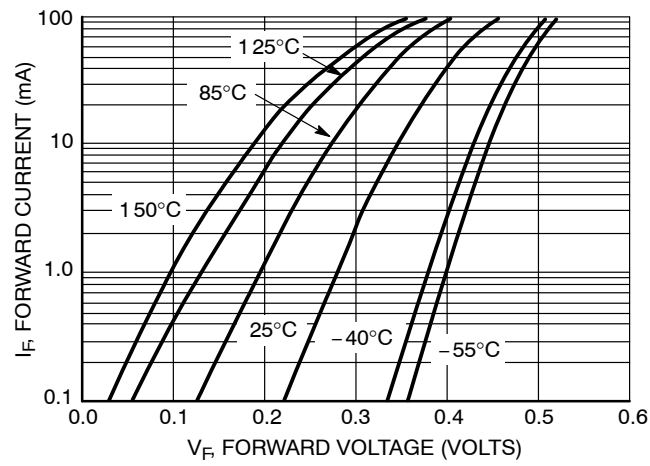

**Figure 2. Forward Voltage**

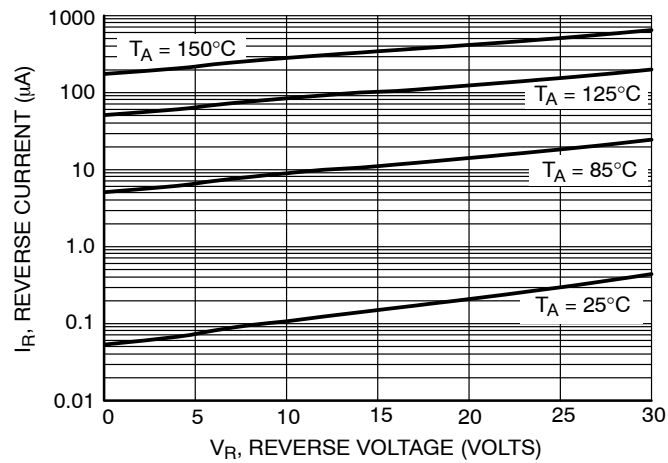


**Figure 3. Leakage Current**

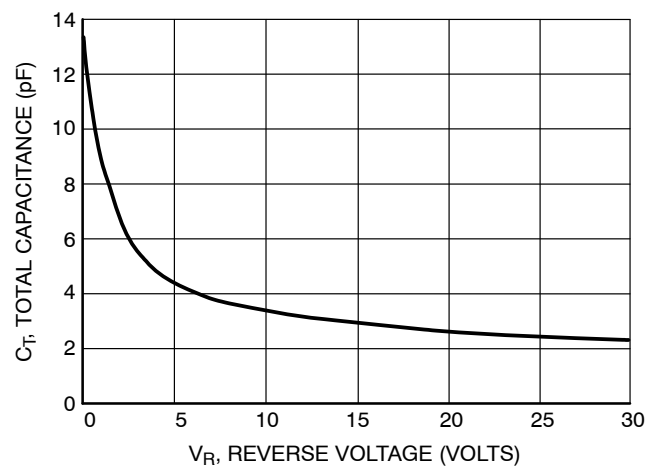


**Figure 4. Total Capacitance**

SC75-3 1.60x0.80x0.80, 1.00P  
CASE 463  
ISSUE H


DATE 01 FEB 2024

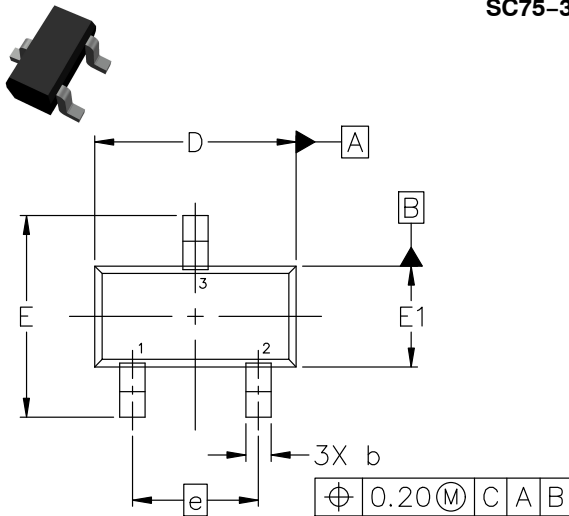

TOP VIEW

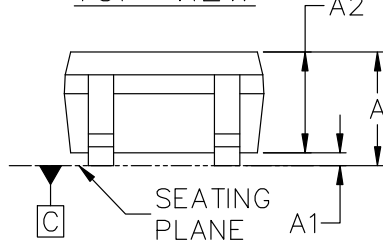


SIDE VIEW



END VIEW

GENERIC  
MARKING DIAGRAM\*



XX = Specific Device Code  
M = Date Code  
▪ = Pb-Free Package

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "▪", may or may not be present. Some products may not follow the Generic Marking.

STYLE 1:  
PIN 1. BASE  
2. EMITTER  
3. COLLECTOR


STYLE 2:  
PIN 1. ANODE  
2. N/C  
3. CATHODE

STYLE 3:  
PIN 1. ANODE  
2. ANODE  
3. CATHODE

STYLE 4:  
PIN 1. CATHODE  
2. CATHODE  
3. ANODE

STYLE 5:  
PIN 1. GATE  
2. SOURCE  
3. DRAIN

| DIM | MILLIMETERS |      |      |
|-----|-------------|------|------|
|     | MIN.        | NOM. | MAX. |
| A   | 0.70        | 0.80 | 0.90 |
| A1  | 0.00        | 0.05 | 0.10 |
| A2  | 0.80 REF.   |      |      |
| b   | 0.15        | 0.20 | 0.30 |
| c   | 0.10        | 0.15 | 0.25 |
| D   | 1.55        | 1.60 | 1.65 |
| E   | 1.50        | 1.60 | 1.70 |
| E1  | 0.70        | 0.80 | 0.90 |
| e   | 1.00 BSC    |      |      |
| L   | 0.10        | 0.15 | 0.20 |

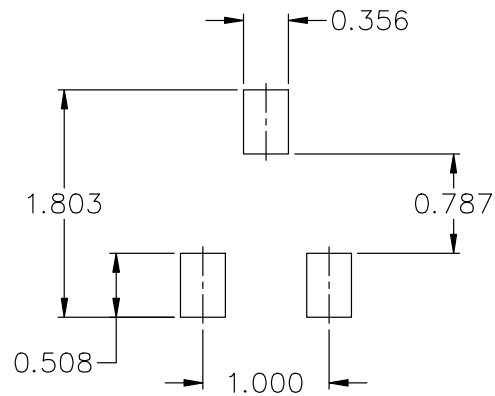

RECOMMENDED MOUNTING FOOTPRINT\*

\* FOR ADDITIONAL INFORMATION ON OUR Pb-FREE STRATEGY AND SOLDERING DETAILS, PLEASE DOWNLOAD THE ON SEMICONDUCTOR SOLDERING AND MOUNTING TECHNIQUES REFERENCE MANUAL, SOLDERRM/D.

|                  |                              |                                                                                                                                                                                  |
|------------------|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DOCUMENT NUMBER: | 98ASB15184C                  | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| DESCRIPTION:     | SC75-3 1.60x0.80x0.80, 1.00P | PAGE 1 OF 1                                                                                                                                                                      |

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at  
[www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)