
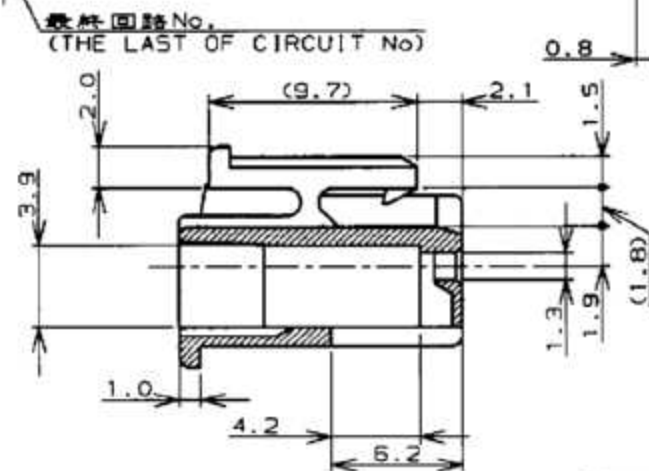
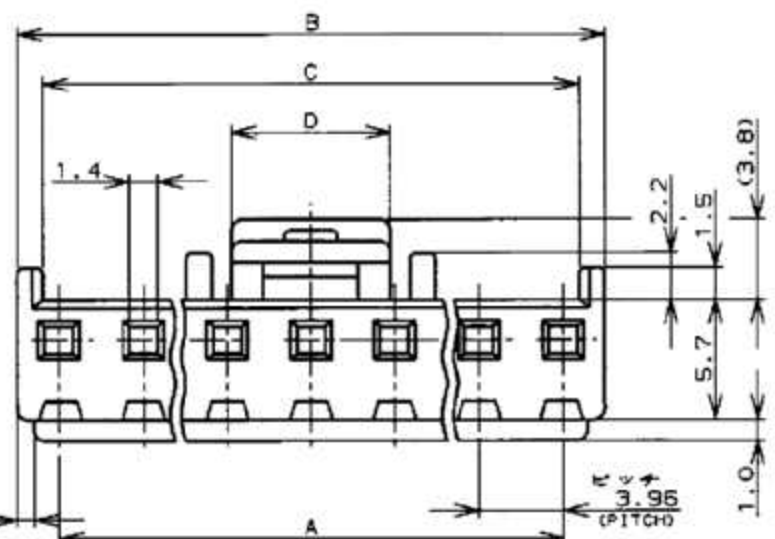
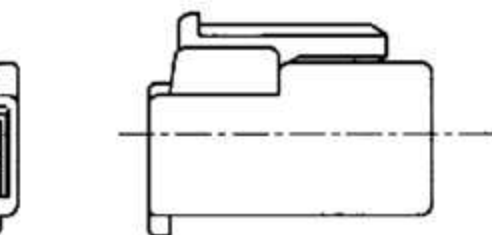


RELEASED FOR PUBLICATION

注記：

- NOTES:

1. APPLICABLE CONTACT P/N : 0-1123721-1
2. MATING CONN P/N: []-1123723-[]
[]-1123724-[]
3. 7-1123722-[] MEET GWT(GLOW WIRE TEST)
750 DEGREE SPEC

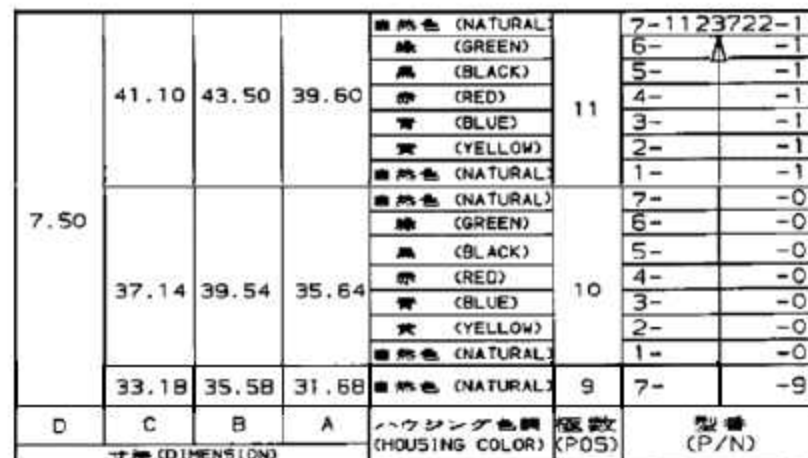

断面 A
SECT A

DIMENSIONS: 単位: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED	
		一般公差 ±0.3 >0.3: 0.4	
MATERIAL 材料 66ナイロン UL94V-0 (66NYLON UL94V-0)		FINISH 仕上 — //	

OWN	24 JUN '98	N. YAMASAKI		TE Connectivity	
CHK	24 JUN '98	M. SHINDO			
APVD	24 JUN '98	M. SHINDO			
PRODUCT SPEC 製品仕様		3.96mm PITCH ECONOMY POWER(EP)CONN. PLUG H5G			
108-5609		3.96mm ピッチエコノミーパワー(EP)コネクタ			
APPLICATION SPEC 取付適用仕様		プラグハウジング			
WEIGHT —H—		SIZE	CAGE CODE	DRAWING NO 番号	RESTRICTED TO
—H—		A3	00779	C= 1123722	
CUSTOMER DRAWING				SCALE 尺度	SHEET OF
				—H—	1 OF 1
					REV D1

参考図面