



MQS

TE Internal #: 1379799-1
12 V / 24 V / 48 V, 4 Position, Automotive Housing for Female
Terminals, Wire-to-Wire, 3.1 mm [.12 in] Centerline, Sealable, Black,
Wire & Cable

[View on TE.com >](#)

Automotive Parts > Automotive Connectors > Automotive Housings > MQS 0.63mm Sealed Connectors



Nominal Voltage Architecture: 12 V, 24 V, 48 V
Connector & Housing Type: **Housing for Female Terminals**
Number of Positions: 4
Sealable: **Yes**
Operating Temperature Range: -40 – 100 °C [-40 – 212 °F]

[All MQS 0.63mm Sealed Connectors \(37\)](#)

Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector & Housing Type	Housing for Female Terminals
Sealable	Yes
Primary Locking Feature	Locking Lance
Connector System	Wire-to-Wire
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	4
Number of Rows	2

Electrical Characteristics

Nominal Voltage Architecture	12 V, 24 V, 48 V
------------------------------	------------------



Body Features

Cable Exit Angle	180 °
Primary Product Color	Black
Connector & Keying Code	A

Contact Features

Contact Size	.64mm
Contact Type	Receptacle
Mating Tab Width	.64 mm[.02 in]

Mechanical Attachment

Strain Relief	Without
Terminal Position Assurance	No
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	PBT GF
Centerline (Pitch)	3.1 mm[.12 in]

Dimensions

Row-to-Row Spacing	2.54 mm[.1 in]
Product Width	26.2 mm[1.03 in]
Product Length	26 mm[1.02 in]
Connector Height	15.3 mm[.6 in]

Usage Conditions

Operating Temperature Range	-40 – 100 °C[-40 – 212 °F]
Operating Temperature (Max)	100 °C[212 °F]

Operation/Application

Circuit Application	Signal
---------------------	--------

Industry Standards

IP Rating	IP67
UL Flammability Rating	UL 94HB

Packaging Features

Packaging Method	Box
------------------	-----



Other

Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance


For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

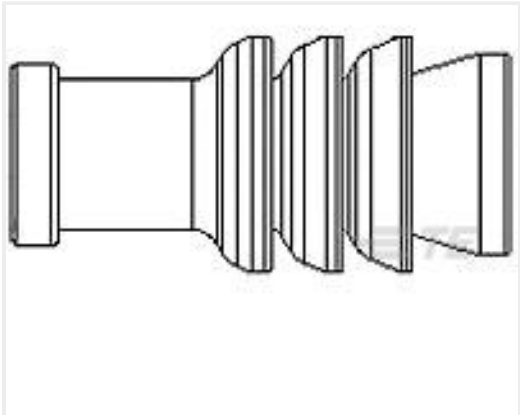

TE Part # 967067-1
MQS SGL WIRE SEAL



TE Part # CAT-N01-MT063
MQS 0.63mm Terminals



TE Part # 967439-1
4P,TAB0.63X0.63,HDR,180DEG,



TE Part # 1379796-1
MQS SOCKET HOUSING 4 POS



TE Part # 1379795-1
MQS PROTECTIVE COVER 4POS

TE Part # 967067-2
MQS EINZELLEITDICHT

TE Part # CAT-M8793-T273
MQS, RECEPTACLE AND TAB

TE Part # 967056-1
MQS BLINDSTOPFEN4MM

Customers Also Bought

TE Part #S8655PRSMF
Panel, RHCP, FIXED, SMAF 865-870MHz, 5dBic,

TE Part #TAD14545101-020
M12D4-MS-FS-PUR-22SH-TYPE C GREEN-2.0M

TE Part #MAF94414
DIPOL, WCR, RPSMA 2.4GHZ, 2DBI, GD PLATED

TE Part #ETRA8213
OMNI, PhE, NMO, 821-896MHz WHT, 3,100,

TE Part #PSQ24495-91NF
Panel, Dband, 91CM, NF 2.4-6.0, 5dBi,

TE Part #FG8243
OMNI, FG, 824-896MHz 860MHz, 3dBd

TE Part #316833-2
040 SEALED REC CONT S FORMING

TE Part #2355843-1
1POS, COAX, SOC HSG ASSY, SLD

TE Part #2409582-1
99POS, 0.5 SERIES, REC HSG, WIRE COVER

TE Part #20019212-00
AST4300W20000P441000-SS: CTO-13000000-03

Documents

Product Drawings

4POS MQS REC SEALED COD A

English

CAD Files

Customer View Model

ENG_CVM_CVM_1379799-1_A.2d_dxf.zip

English

3D PDF



3D

Customer View Model

[ENG_CVM_CVM_1379799-1_A.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1379799-1_A.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Product Specification](#)

French

Instruction Sheets

[Instruction Sheet \(non U.S.\)](#)

English