




Automotive Parts > Automotive Connectors > Automotive Housings > TH/.025 CONNECTOR SYSTEM, HOUSING

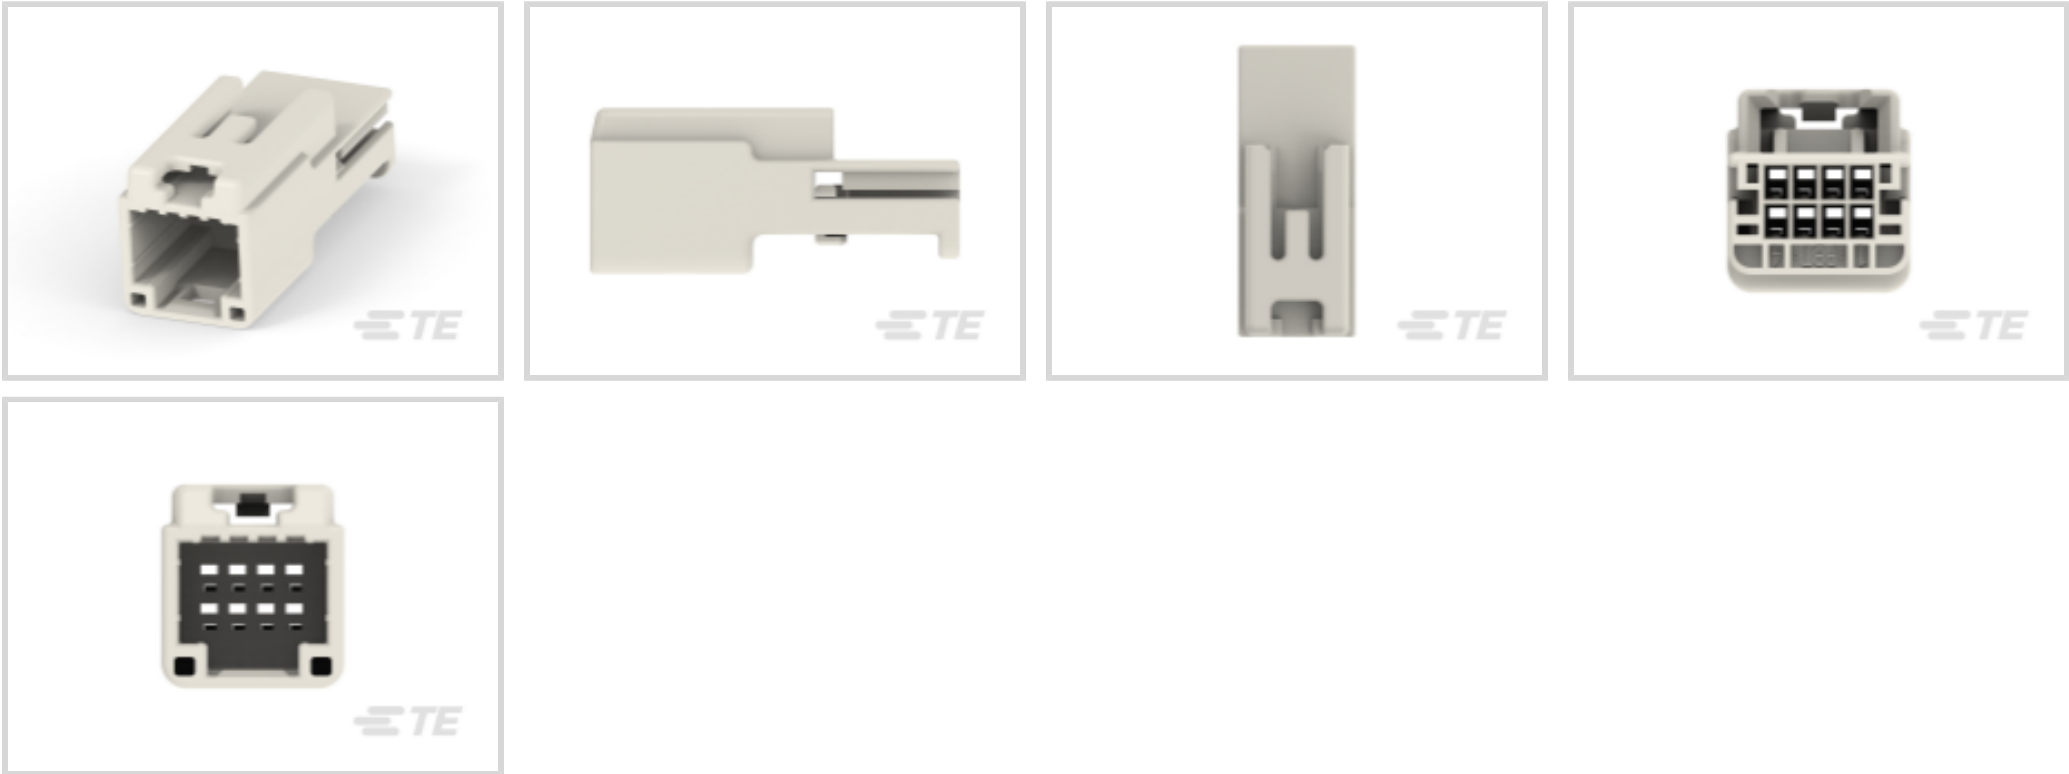

Nominal Voltage Architecture: 12 V

Connector & Housing Type: **Housing for Male Terminals**

Number of Positions: 8

Sealable: **No**

Operating Temperature Range: -30 – 80 °C [-22 – 176 °F]

[All TH/.025 CONNECTOR SYSTEM, HOUSING \(167\)](#)

Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector & Housing Type	Housing for Male Terminals
Sealable	No
Primary Locking Feature	On the Terminal
Connector System	Wire-to-Wire
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	8
Number of Rows	2

Electrical Characteristics

Operating Voltage	12 VDC
-------------------	--------



Nominal Voltage Architecture	12 V
------------------------------	------

Body Features

Cable Exit Angle	180 °
Primary Product Color	Natural

Contact Features

Contact Size	.64mm
Contact Type	Tab
Mating Tab Width	.64 mm[.025 in]

Mechanical Attachment

Strain Relief	Without
Terminal Position Assurance	No
Mating Alignment Type	Polarization
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	Polybutylene Terephthalate (PBT)
Centerline (Pitch)	2.2 mm[.087 in]

Dimensions

Row-to-Row Spacing	3 mm[.12 in]
Product Width	35.2 mm[1.386 in]
Product Length	14.2 mm[.56 in]
Connector Height	15.8 mm[.622 in]

Usage Conditions

Operating Temperature Range	-30 – 80 °C[-22 – 176 °F]
Operating Temperature (Max)	80 °C[176 °F]

Operation/Application

Circuit Application	Signal
---------------------	--------

Industry Standards

UL Flammability Rating	UL 94HB
------------------------	---------

Packaging Features

Packaging Quantity	100
--------------------	-----



Packaging Method	Bag
Other	
Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




TE Part # CAT-M9194-CH8172
Multilock Connector Housing




TE Part # CAT-T319-CH8172
TH/.025 CONNECTOR SYSTEM,
HOUSING


Also in the Series | 0.64/025 Connector System

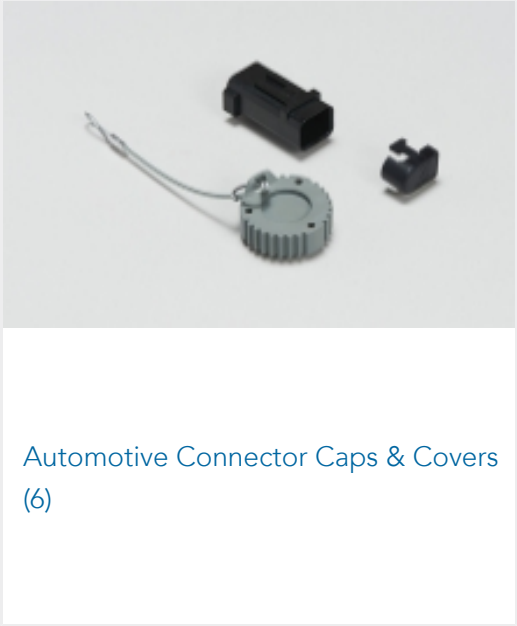

Automotive Connector Caps & Covers
(6)

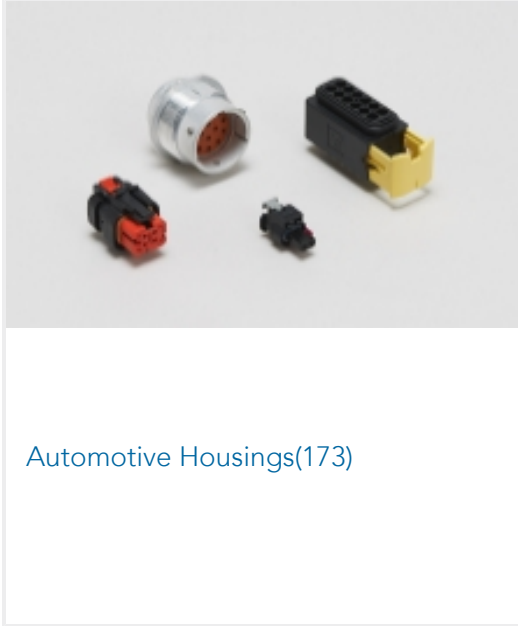


Automotive Housings(173)

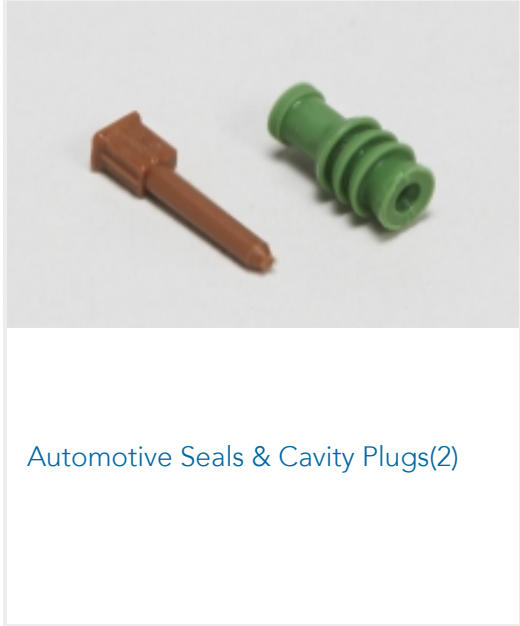

Automotive Seals & Cavity Plugs(2)



Automotive Signal & Power Headers
(152)

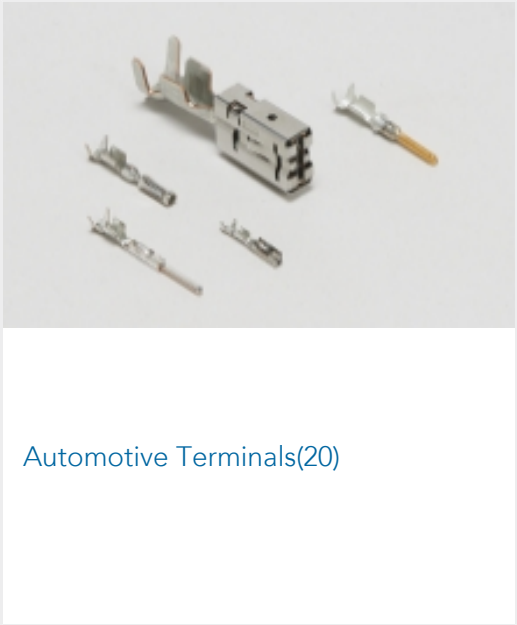

Automotive Terminals(20)

Customers Also Bought




TE Part #ER0379-000
ES-SLV-115-50MM-1048-1X



TE Part #537637P043
SCT-NO.3-E3-0-30MM



TE Part #172020-1
13P MINI AMPIN HEADER HSG

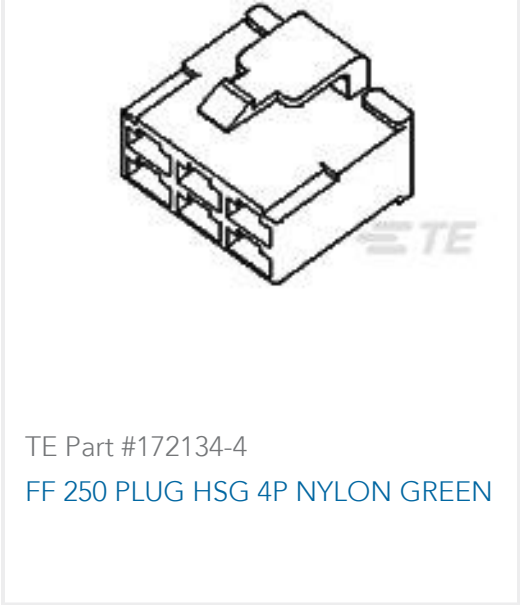

TE Part #172134-4
FF 250 PLUG HSG 4P NYLON GREEN



TE Part #353537-1
040-3 UNSEALED CONT.TAB(S)



TE Part #1376109-1
025 TAB CONT



TE Part #CAT-T319-CH8172
TH/.025 CONNECTOR SYSTEM,
HOUSING



TE Part #2005327-1
025/090/110 HYB 24P PLUG ASSY



TE Part #174259-3
EJ II+4POS CAP HSG

Documents

Product Drawings

025 IDC 8POS CAP ASSY W TO W

English

CAD Files

3D PDF

English

Customer View Model

ENG_CVM_1473793-1_O.2d_dxf.zip

English

Customer View Model

ENG_CVM_1473793-1_O.3d_igs.zip

English

Customer View Model

ENG_CVM_1473793-1_O.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

Japanese

.025 IDC Connectors

Japanese

Application Specification

Japanese

Instruction Sheets

025 WIRE TO WIRE MALE CONNECTOR

Japanese

Instruction Sheet (non U.S.)

Japanese

025 WIRE TO WIRE MALE CONNECTOR

Japanese

Instruction Sheet (non U.S.)

Japanese

1473793-1

12 V, 8 Position, Automotive Housing for Male Terminals, Wire-to-Wire, 2.2 mm [.087 in] Centerline, Natural, Wire & Cable, 0.64/025 Connector System

