




Connectors > PCB Connectors > PCB Headers & Receptacles

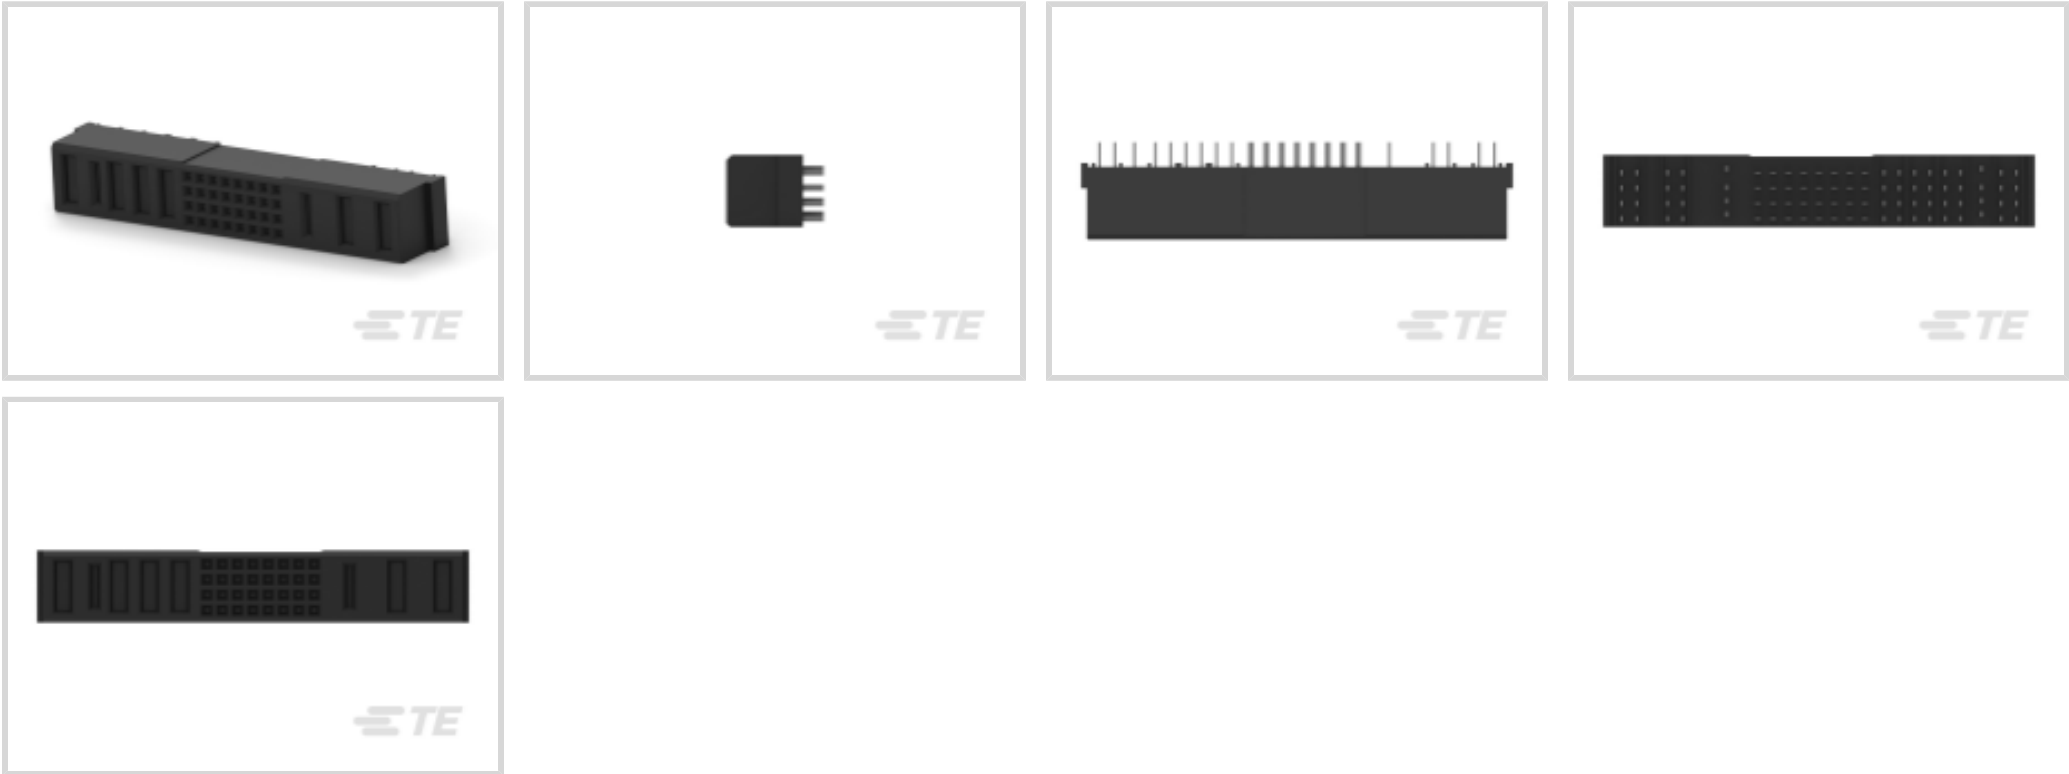

PCB Connector Type: **PCB Mount Receptacle**

Connector System: **Board-to-Board**

Number of Positions: **40**

Number of Rows: **4**

Centerline (Pitch): **2.54 mm, 5.08 mm, 7.62 mm [.1 in, .2 in, .3 in]**

Features

Product Type Features

Mixed & Hybrid Header	Yes
Connector Shape	Rectangular
PCB Connector Type	PCB Mount Receptacle
Connector System	Board-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Connector Product Type	Connector Assembly

Configuration Features

Number of Columns	16
Number of Loaded Positions	40
Mating & Unmating Configuration	Normal
Number of Positions	40
Number of Rows	4



PCB Mount Orientation	Vertical
Number of Power Positions	8
Number of Signal Positions	32

Electrical Characteristics

Operating Voltage	60 VDC, 300 VDC
-------------------	-----------------

Body Features

Primary Product Color	Black
-----------------------	-------

Contact Features

Contact Underplating Material	Nickel
Contact Underplating Material Thickness	1.27 – 2.54 µm[50 – 100 µin]
PCB Contact Termination Area Plating Material Thickness	2.54 – 5.08 µm[100 – 200 µin]
Contact Layout	Matrix
Contact Base Material	Copper Alloy
Contact Mating Area Plating Material	Gold (Au)
Contact Type	Receptacle
Contact Current Rating (Max)	42 A
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material Thickness	.76 µm[30 µin]

Termination Features

Termination Post & Tail Length	3.43 mm[.135 in]
Termination Method to PCB	Through Hole - Press-Fit

Mechanical Attachment

Mating Retention	Without
Mating Alignment Type	Polarization
Connector Mounting Type	Board Mount
Mating Alignment	With
PCB Mount Alignment	Without
PCB Mount Retention	Without

Housing Features

Centerline (Pitch)	2.54 mm, 5.08 mm, 7.62 mm [.1 in][.2 in][.3 in]
Housing Material	High Temperature Thermoplastic Glass-Filled



Dimensions

Connector Width	11.94 mm[.47 in]
Connector Height	12.7 mm[.5 in]
Connector Length	71.63 mm[2.82 in]
Row-to-Row Spacing	2.54 mm[.1 in]
PCB Thickness (Recommended)	1.35 mm[.053 in]

Usage Conditions

Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-40 – 125 °C[-40 – 257 °F]

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Industry Standards

Glow Wire Rating	High Temperature Part - Not Glow Wire
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	33
Packaging Method	Tray

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as



EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

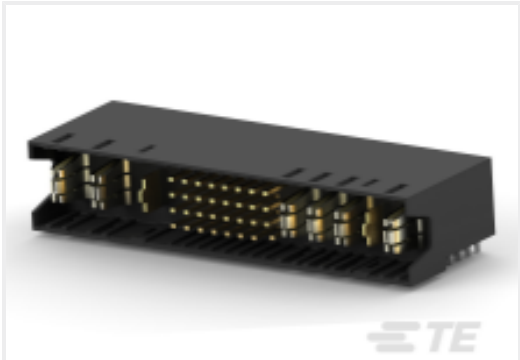


TE Part # 6450849-7


MBXLE R/A HED

2ACP+1LP+32S+3HDP+1LP+1P

Also in the Series | MULTI-BEAM XLE

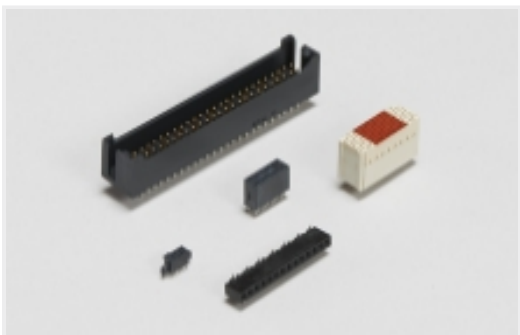

Board-to-Board Headers & Receptacles(97)

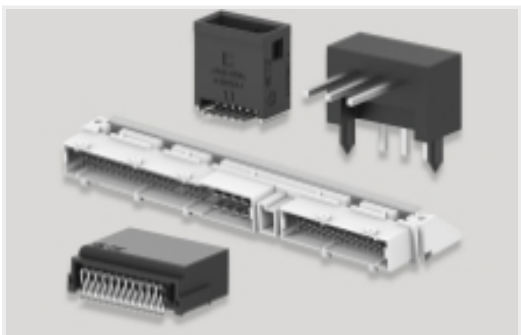


PCB Headers & Receptacles(97)



Rectangular Connector Housings(12)



Rectangular Power Connectors(106)

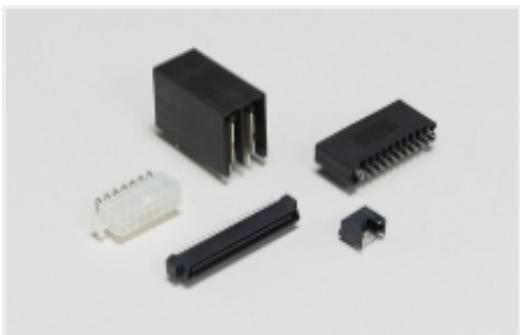

Standard Rectangular Connectors(12)

Customers Also Bought



TE Part #103361-6
08 MODII HDR SRRA SHRD .100CL



TE Part #1410140-1
MULTIGIG RT T2 .8" BP FULL CNT



TE Part #1410142-1
MULTIGIG RT T2 .8" BP FULL RGH



TE Part #1410186-1
MULTIGIG RT T2 .8" BP H-LFT



TE Part #1410187-3
MULTIGIG RT T2 7RW DC DF CT



TE Part #1-1469491-2
MULTIGIG RT GUIDE PIN, 9MM 2.60




TE Part #2102737-1
BP, Right End, MULTIGIG RT 2R



TE Part #2344044-1
2 PORT HDR SEALED MATENET ASSY, COD A/B



TE Part #5050462-2
SOCKET, MIN-SPR W/H SN-AU SER-2

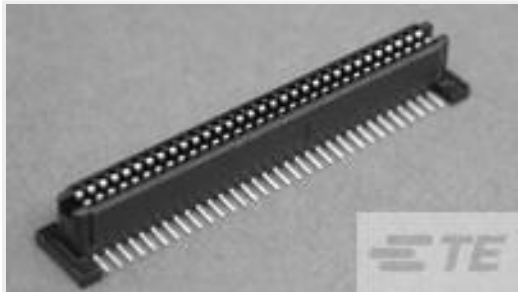

TE Part #2-5146893-1
1FHR, 64, 30A/S, R, C, S08, 09, 10

Documents

Product Drawings

V/R 2ACP+1LP+32S+3HDP+1LP+1P

English

V/R 2ACP+1LP+32S+3HDP+1LP+1P

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-6450869-4_A1.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-6450869-4_A1.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-6450869-4_A1.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.



[Product Specifications](#)

[Application Specification](#)

English