




Connectors > PCB Connectors > PCB Headers & Receptacles

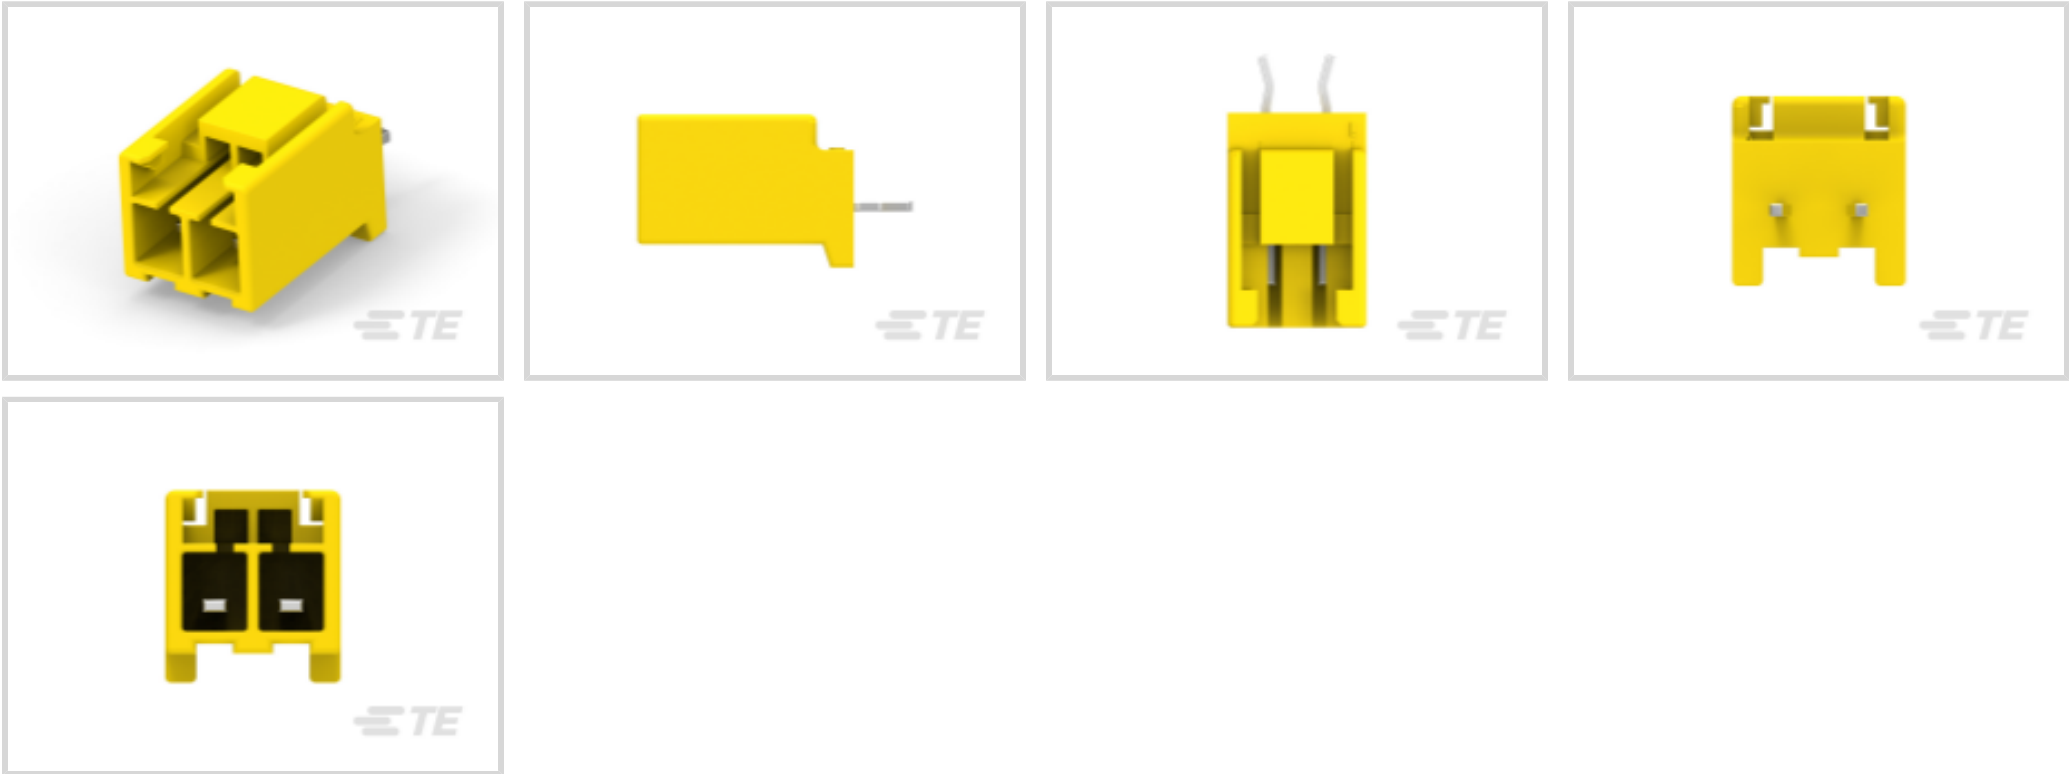

PCB Connector Type: **PCB Mount Header**

PCB Mount Orientation: **Vertical**

Connector System: **Wire-to-Board**

Number of Positions: **2**

Centerline (Pitch): **3.96 mm [.155 in]**

Features

Product Type Features

Mixed & Hybrid Header	No
Connector Shape	Rectangular
PCB Connector Type	PCB Mount Header
Connector System	Wire-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Connector Product Type	Connector Assembly

Configuration Features

Number of Columns	2
Number of Loaded Positions	2
Connector Contact Load Condition	Fully Loaded
PCB Mount Orientation	Vertical
Number of Positions	2



Number of Rows	1
Number of Power Positions	2

Electrical Characteristics

Operating Voltage	50 VAC
-------------------	--------

Body Features

Primary Product Color	Yellow
-----------------------	--------

Contact Features

Contact Underplating Material	Nickel
Contact Underplating Material Thickness	.8 – 1.8 µm[31.49 – 70.86 µin]
PCB Contact Termination Area Plating Material Finish	Bright
Contact Size	1.2mm
Mating Tab Width	1.2 mm[.047 in]
PCB Contact Termination Area Plating Material Thickness	1 µm[39.37 µin]
Contact Shape & Form	Rectangular
Contact Layout	Inline
Contact Base Material	Brass
Mating Tab Thickness	.64 mm[.025 in]
Contact Mating Area Plating Material	Tin (Sn)
Contact Mating Area Plating Material Finish	Bright
Contact Mating Area Plating Material Thickness	1 µm[39.37 µin]
Contact Type	Tab
Contact Current Rating (Max)	12 A
PCB Contact Termination Area Plating Material	Tin

Termination Features

Rectangular Termination Post & Tail Width	.64 mm[.025 in]
Rectangular Termination Post & Tail Thickness	.64 mm[.025 in]
Termination Post & Tail Length	3.8 mm[.15 in]
Termination Method to PCB	Through Hole - Solder

Mechanical Attachment

Panel Mount Feature	Without
Mating Retention Type	Locking Latch
PCB Mount Retention Type	Kinked Legs



PCB Mount Alignment	Without
Mating Retention	With
PCB Mount Retention	With
Connector Mounting Type	Board Mount
Mating Alignment	Without

Housing Features

Mating Entry Location	Top
Centerline (Pitch)	3.96 mm[.155 in]
Housing Material	Nylon 6/6 GF

Dimensions

Connector Width	9.9 mm[.39 in]
PCB Thickness (Recommended)	1.6 mm[.063 in]
Connector Height	14 mm[.551 in]
Connector Length	9.06 mm[.357 in]

Usage Conditions

Operating Temperature (Max)	105 °C[221 °F]
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

Glow Wire Rating	Standard Part - Not Glow Wire
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	400
Packaging Method	Bag

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold



EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts



TE Part # 176271-4
AMP UNIVERSAL POWER PLUG 2P

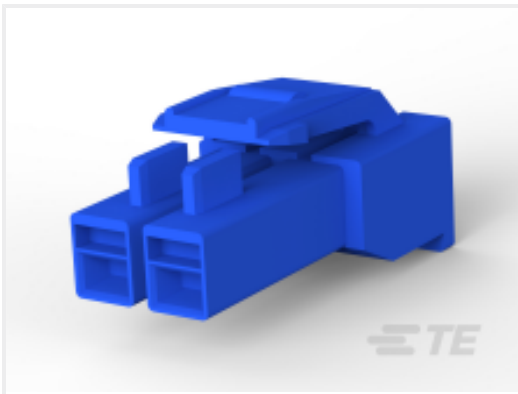

TE Part # 176271-6
AMP UNIVERSAL POWER PLUG 2P

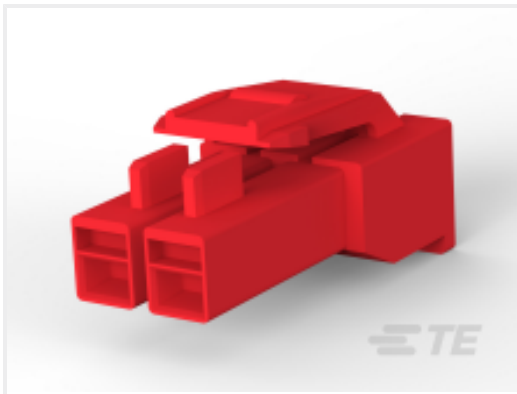

TE Part # 176271-2
AMP UNIVERSAL POWER PLUG 2P



TE Part # 176271-1
AMP UNIVERSAL POWER PLUG 2P



TE Part # 176271-9
AMP UNIVERSAL POWER PLUG 2P


Also in the Series | Power Double Lock



Connector Contacts(22)




Connector Hardware(25)

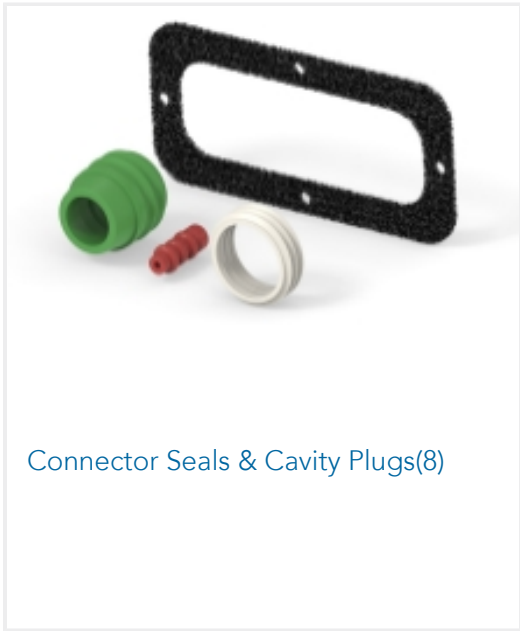

Connector Seals & Cavity Plugs(8)



Insertion & Extraction Tools(1)

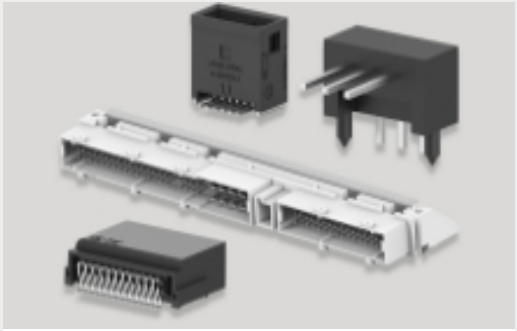


PCB Headers & Receptacles(51)



Power Contacts(21)



Rectangular Power Connectors(163)

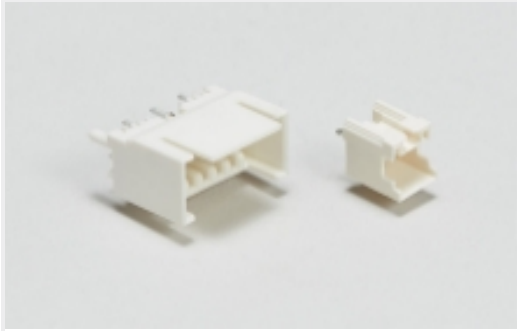


Wire-to-Board Headers & Receptacles (51)

Also in the Series | AMP Universal Power



Connector Contacts(22)

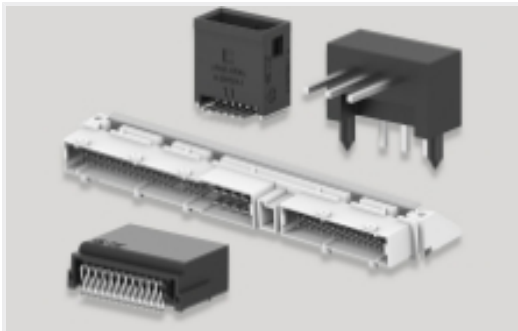

PCB Headers & Receptacles(51)




Power Contacts(21)



Rectangular Connector Housings(112)



Rectangular Power Connectors(163)

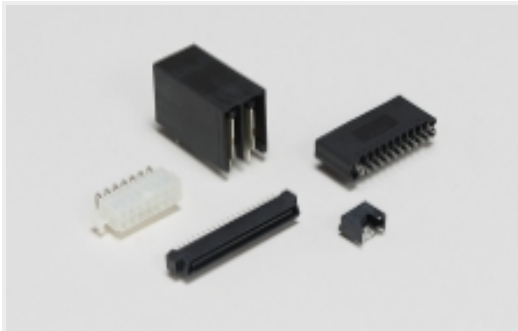

Standard Rectangular Connectors(112)



Wire-to-Board Connector Assemblies & Housings(13)

Customers Also Bought



TE Part #EC9833-000
ZHD-SCE-3.2-50-S1-4

TE Part #ASA158F12390235000
623 PLUG

TE Part #55992-1
TERMINAL,AMPOWER R 2/0 5/16

TE Part #1-1415543-5
RTE44110

TE Part #1614770-4
BDS 2 A 250 10R 10%

TE Part #YZ-KC-212751A-PY00
TOOL DISMOUNTING - FXP2

TE Part #ZPF000000000205373
PLUG MALE ANG.90 CAL.20 - FXP

TE Part #ZPF000000000136485
RECEPTACLE MALE FOR 12 PINS, CAL1,6

TE Part #ZPF000000000205388
CONTACT FEMALE CAL.20, M12 - FXP

TE Part #ZPF000000000205378
CONTACT MALE ANG.90, CAL20, 120MM2 - FXP

Documents

Product Drawings

UNIV POWER HDR ASSY 2P YELLOW

Japanese

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_176975-4_F.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_176975-4_F.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_176975-4_F.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages



1773458-5_POWER_DBL_LOCK_(PDL)_CONNECTORS

English

Product Specifications

Application Specification

English

Instruction Sheets

AMP UNIVERSAL POWER CONNECTOR SERIES

English

Instruction Sheet (non U.S.)

English

Agency Approvals

UL Report

English