


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
G	14		A	REVISED PER ECO-13-009685	11JUN13	KH	DR

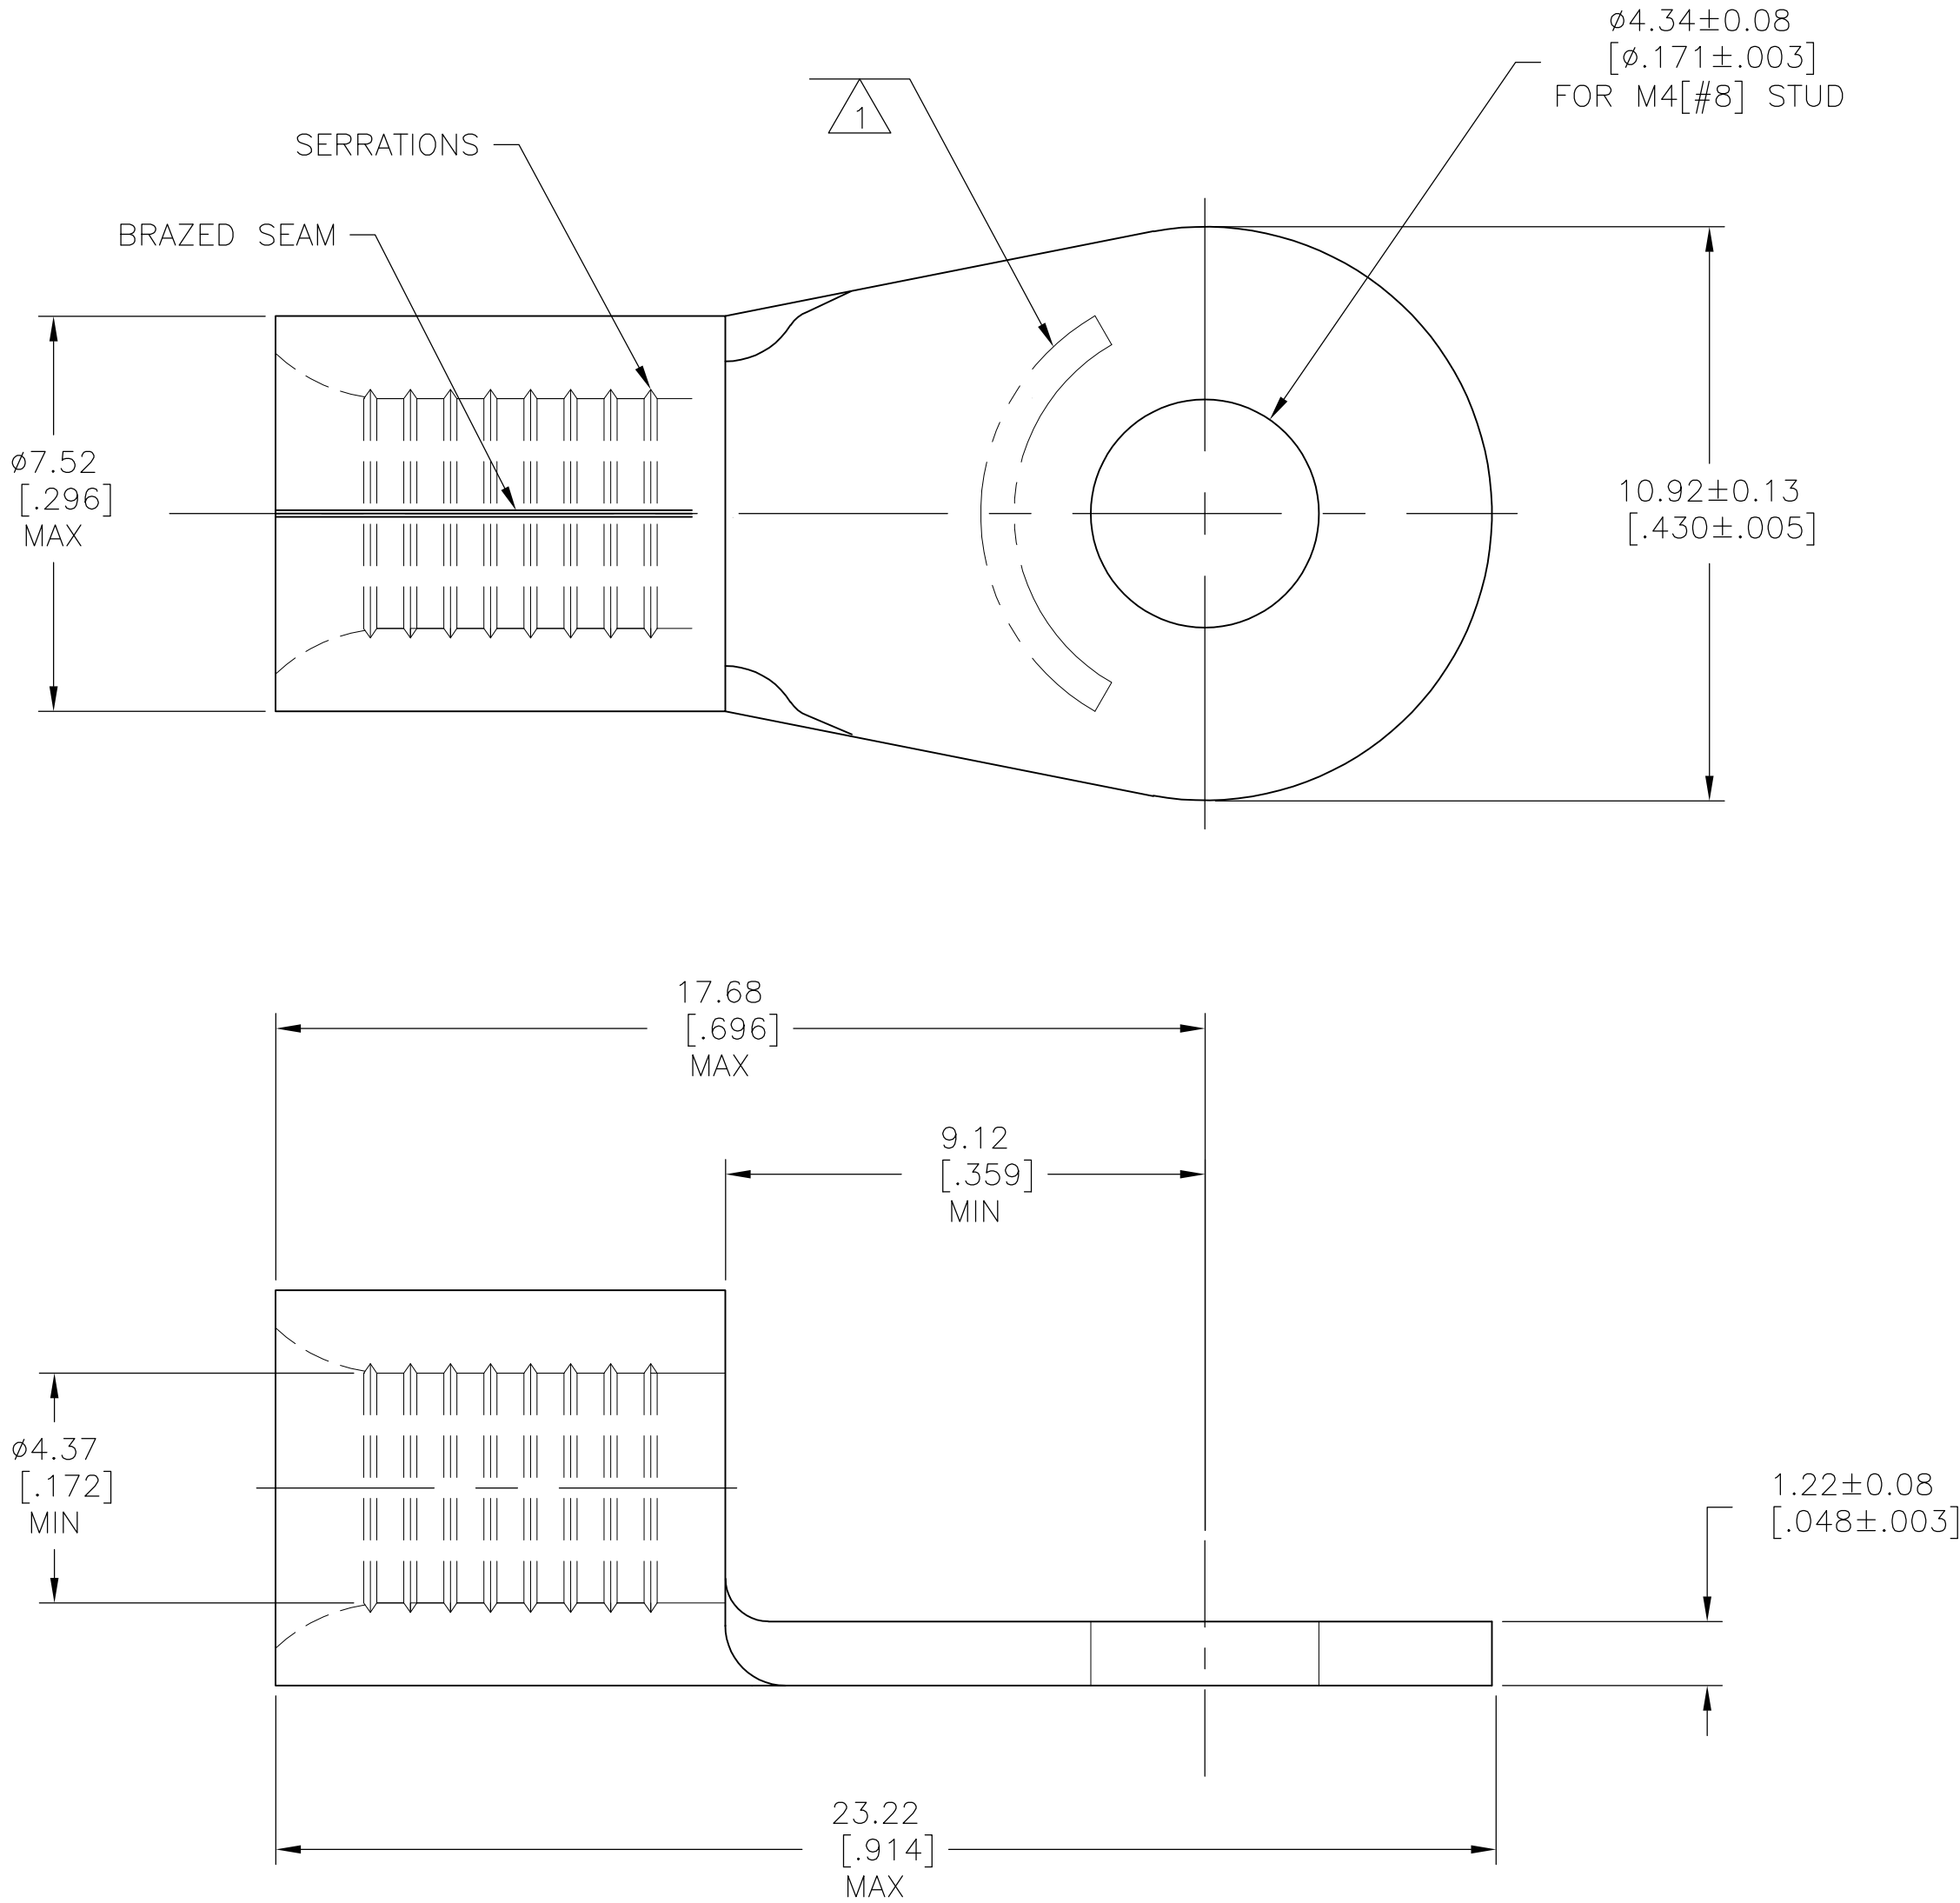

- 1
- 2
- STAMP AMP 8* APPROX AS SHOWN
- GOLD PLATE 0.00127[.000050] MIN EXT THK PER ASTM B488, TYPE I, CODE C, OVER NICKEL PLATE 0.00127[.000050] MIN EXT THK PER SAE AMS QQ-N-290 OVER COPPER FLASH PER SAE AMS 2418

AMP
WIRE RANGE

8 AWG
SOLID OR STRANDED

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 260°C [500°F]
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: NOT APPLICABLE
		WIRE CROSS SECTIONAL AREA RANGE: 6.64-10.5MM ² [13,100-20,800] CIR MILS SOLID OR STRANDED
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	
FOR ORDER ENTRY	1-800-526-5142	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN KIRAN HOLAL 07DEC12		 TE Connectivity			
		CHK ROHDE DANIEL 07DEC12					
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME TERMINAL, RING TONGUE, STRATO-THERM			
		APVD ROHDE DANIEL 07DEC12					
		PRODUCT SPEC —					
		APPLICATION SPEC —					
MATERIAL COPPER PER ASTM B-152 ANNEALED		FINISH 		SIZE A2	CAGE CODE 00779	DRAWING NO C=1958437	RESTRICTED TO —
CUSTOMER DRAWING				SCALE 8:1	SHEET 1 of 1	REV A	