

REVISIONS					
#	LYR	DESCRIPTION	DATE	DWN	APVD
G1		REVISED PER ECO-11-004820	11MAR11	RK	HMR
H		REVISED PER ECO-17-000037	10MAR2017	RS	MZ
J		REVISED PER ECO-19-014836	23OCT2019	RS	MZ

NOTES:





1. WILL ACCEPT (19) MULTIMATE SOCKET CONTACTS.

CONTACT CAVITIES IDENTIFIED BY CHARACTERS ON FRONT AND REAR FACES OF CONNECTOR.

3.81[.150] MAX INSULATION DIAMETER.


2.54[.100] MAX INSULATION DIAMETER.

MATERIALS:
HOUSING: PA66, BLACK
PERIPHERAL SEAL: NITRILE BUTADIENE RUBBER, BLACK
THREADED INSERTS: BRASS

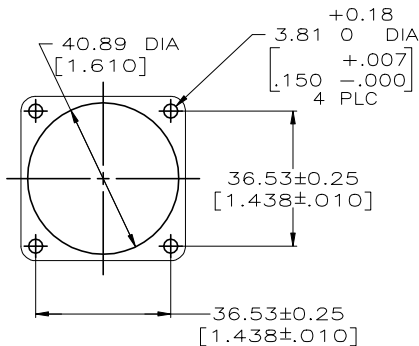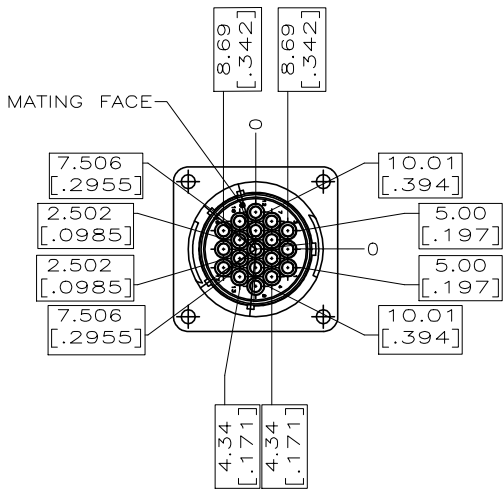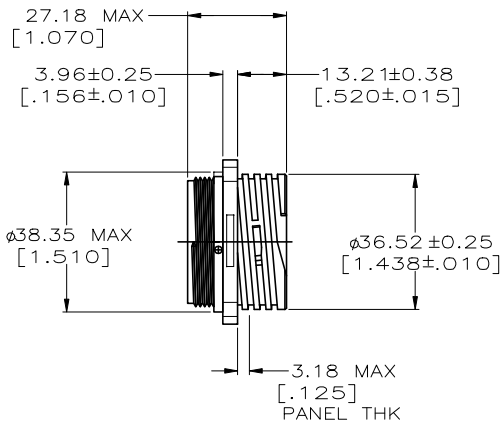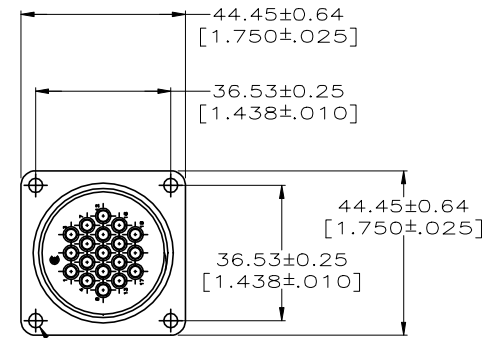


PANEL CUTOUT

211773-1, 211773-2, 211773-6 & 211773-7

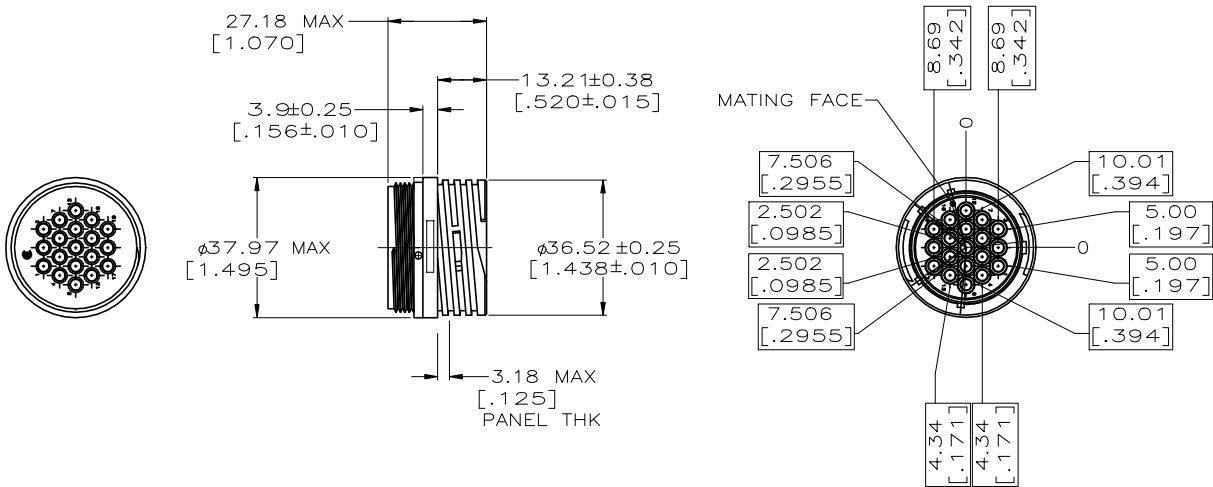

211773-4

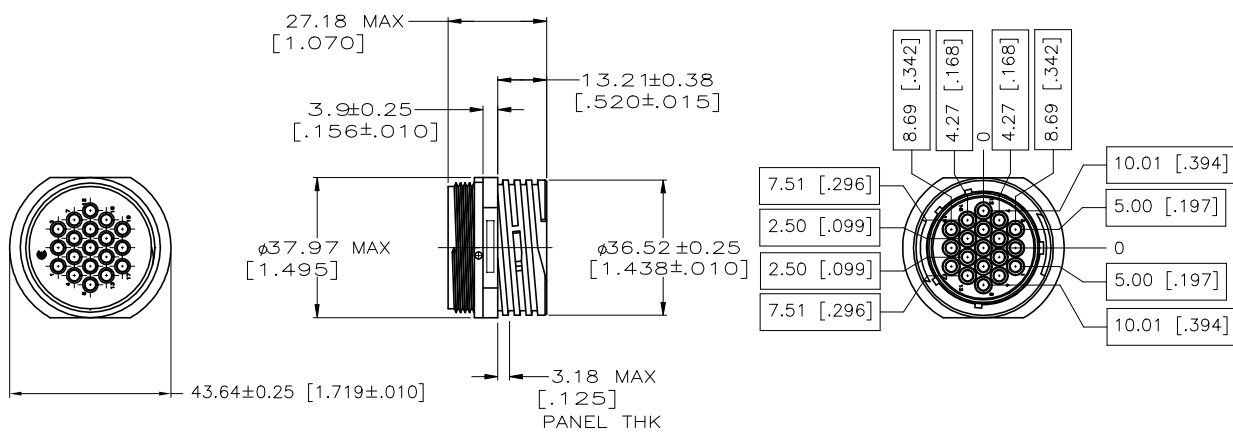

211773-5

	4-40 THREADED INSERTS	NO	211773-7
OBSOLETE	4-40 THREADED INSERTS	YES	211773-6
OBSOLETE	—	NO	211773-5
OBSOLETE	—	NO	211773-4
4	3.81 [.150] HOLES	NO	211773-2
3	3.81 [.150] HOLES	NO	211773-1
MOUNTING FEATURES		PERIPHERAL SEAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. URICH 02JAN01	TE Connectivity	
DIMENSIONS: mm		CHK M. CHACO 02JAN01	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M. CHACO 02JAN01	RECEPTACLE HOUSING, REVERSE SEX, SERIES I, SHELL SIZE 23, CPC	
0 PLC ± -		PRODUCT SPEC	SIZE CAGE CODE DRAWING NO	
1 PLC ± -		APPLICATION SPEC	RESTRICTED TO	
2 PLC ± 0.1% (.005)		WEIGHT	A1 00779 C=211773	
3 PLC ± -		SCALE 1:1	SHEET 1 OF 1	
4 PLC ± -		REV J		
ANGLES ± -				
MATERIAL 5				
FINISH -				