



Connectors > Pluggable IO Connectors & Cages



Pluggable I/O Product Type: **Cage Assembly**

Sealable: **No**

Circuit Application: **Signal**

Operating Temperature Range: **-55 – 105 °C [-67 – 221 °F]**

Data Rate (Max): **16 Gb/s**

Features

Product Type Features

Cage Type	Ganged
Thermal Accessory Type Included	Heat Sink
Pluggable I/O Product Type	Cage Assembly
Sealable	No
Form Factor	SFP+

Configuration Features

Lightpipe Style	Standard
Number of Ports	2
Port Matrix Configuration	1 x 2

Electrical Characteristics

Data Rate (Max)	16 Gb/s
-----------------	---------

Body Features

	.256 in
Heat Sink Style	Pin
Heat Sink Height Class	SAN

Termination Features

Termination Method to PCB	Through Hole - Press-Fit
Termination Post & Tail Length	2.05 mm[.081 in]

Housing Features



Cage Material	Nickel Silver
---------------	---------------

Dimensions

PCB Thickness (Recommended)	2.25 mm
-----------------------------	---------

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Pluggable I/O Applications	SFP+ Enhanced
Heat Sink Compatible	Yes
Circuit Application	Signal

Packaging Features

Packaging Method	Tray
------------------	------

Other

Included Lightpipe	Yes
EMI Containment Feature Type	Internal/External EMI Springs

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides



on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 TE Part # CAT-C11-H5062 SFP+ to SFP+ I/O Cable Assembly: 28 AWG	 TE Part # 2142970-2 CABLE ASSY, MICRO SFP+ TO STD SFP+, 1M	 TE Part # 2334985-2 SFP28 DIRECT ATTACH CA, 1M, 32AWG	 TE Part # 2142970-4 CABLE ASSY, MICRO SFP+ TO STD SFP+, 3M
 TE Part # CAT-C11-N49011 SFP28 to SFP28 Cable Assembly: 26 AWG	 TE Part # 4-2821224-5 SFP56 DIRECT ATTACH CA, 3M, 26AWG	 TE Part # CAT-Q17-N49011 QSFP56-Four SFP56 Cable Assembly: 30 AWG	 TE Part # 2142970-3 CABLE ASSY, MICRO SFP+ TO STD SFP+, 2M
 TE Part # CAT-C11-N490333 QSFP28-Four SFP+ Cable Assembly: 30 AWG	 TE Part # CAT-C11-N490325 QSFP28-Four SFP+ Cable Assembly: 26 AWG	 TE Part # CAT-Q17-N490333 QSFP56-Four SFP56 Cable Assembly: 26 AWG	 TE Part # 2142970-6 CABLE ASSY, MICRO SFP+ TO STD SFP+, 5M
 TE Part # 2142970-5 CABLE ASSY, MICRO SFP+ TO STD SFP+, 4M	 TE Part # 2821033-8 QSFP TO [4]SFP+, 28G, 1M, 33AWG	 TE Part # CAT-C11-H506 SFP+ to SFP+ I/O Cable Assembly: 26 AWG	 TE Part # 2142970-1 CABLE ASSY, MICRO SFP+ TO STD SFP+, 0.5M





TE Part # CAT-C11-H50626
SFP+ to SFP+ I/O Cable Assembly: 30 AWG



TE Part # 2110759-1
PT CONN ASSY 20 POS 16G SFP



TE Part # 4-2334985-2
SFP56 DIRECT ATTACH CA, 1M, 32AWG



TE Part # CAT-C11-N4901114
SFP28 to SFP28 Cable Assembly: 30 AWG

Customers Also Bought



TE Part #114017-ZZ
SEALING PLUG, SIZE 12/16, WHT



TE Part #CAT-D48-ST273
DEUTSCH Solid Contacts




TE Part #DT04-2P
REC, 2P, GRY, N



TE Part #CAT-D487-W416
WedgeLocks: DEUTSCH DT



TE Part #DT06-2S
PLG, 2P, GRY, N

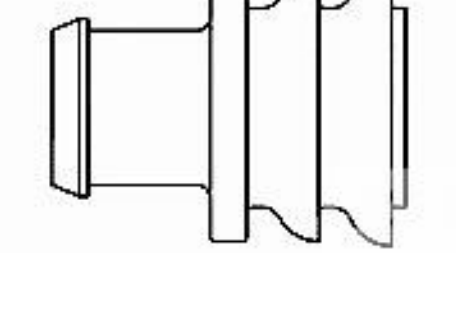

TE Part #281934-2
SINGLE WIRE SEAL



TE Part #CAT-AM71-CH8172
AMP SUPERSEAL 1.5MM, CONNECTOR HOUSING

Documents

CAD Files

Customer View Model

ENG_CVM_CVM_2198232-2_1.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2198232-2_1.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2198232-2_1.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English

2198232-2

SFP+, Cage Assembly, Signal, Operating Temperature Range -55 – 105 °C [-67 – 221 ° F], Data Rate (Max) 16 Gb/s, 2 Ports

