




KEY CODE "A"
2309644-1

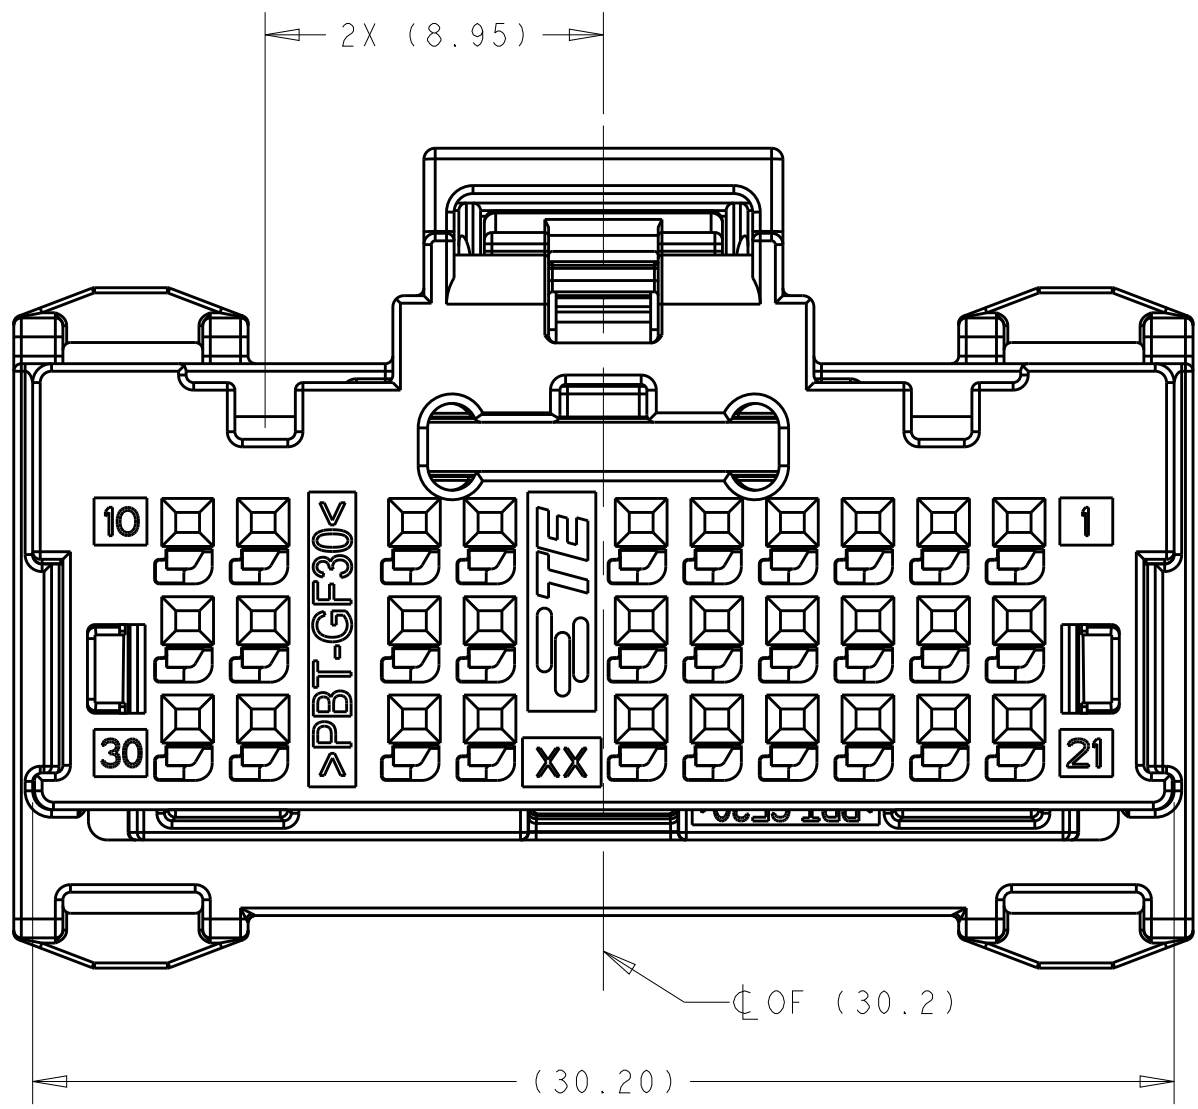


KEY CODE "B"
2309644-2

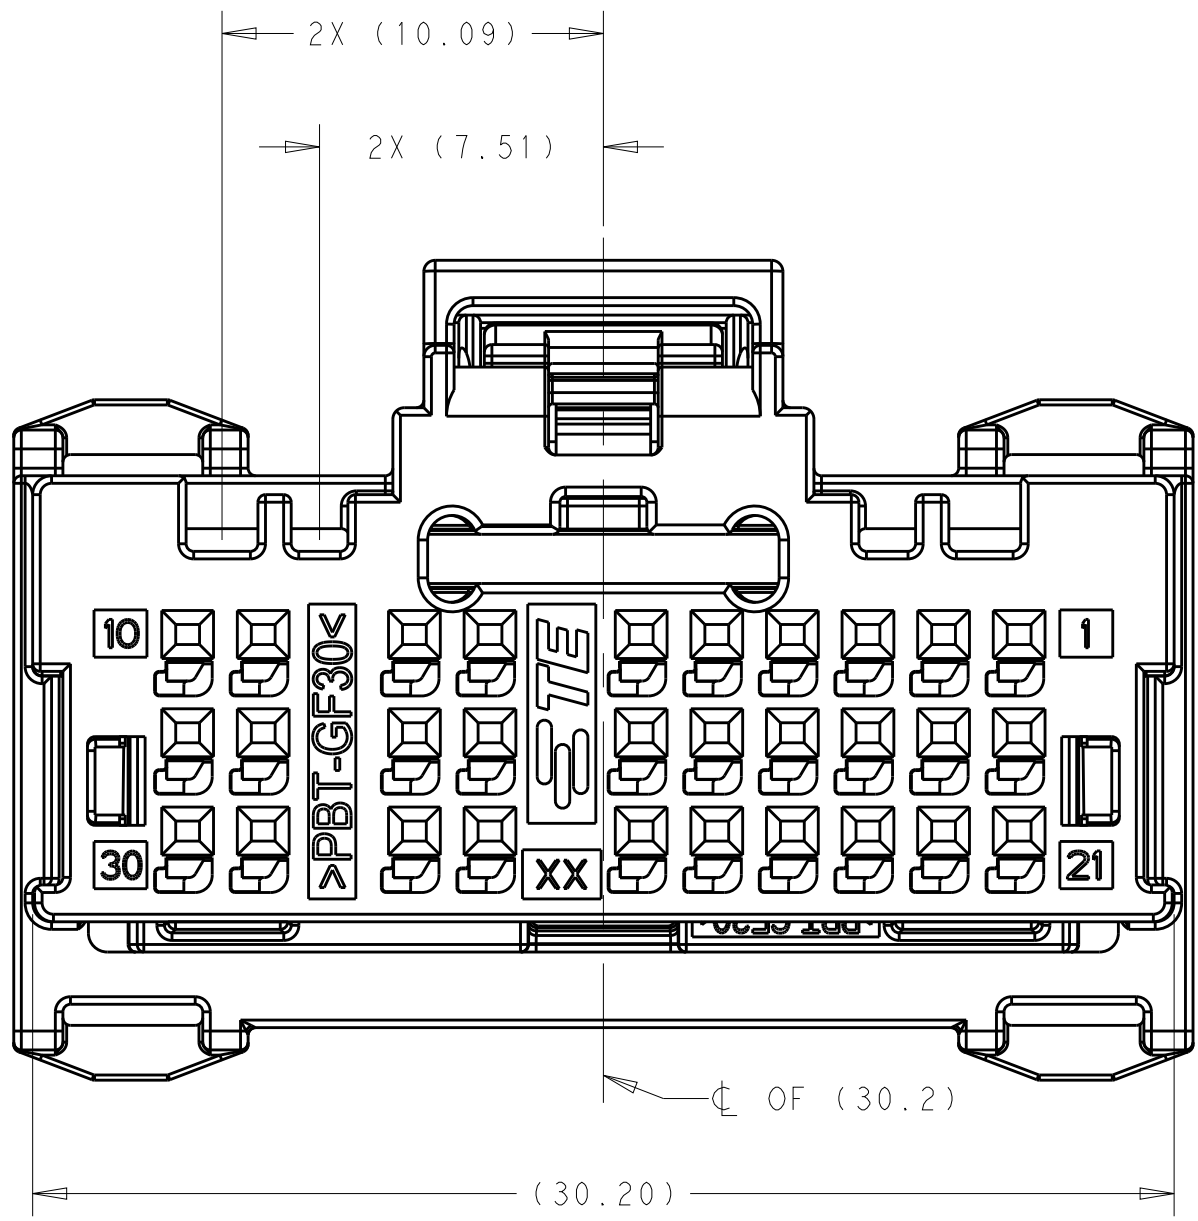

KEY CODE "C"
22309644-3

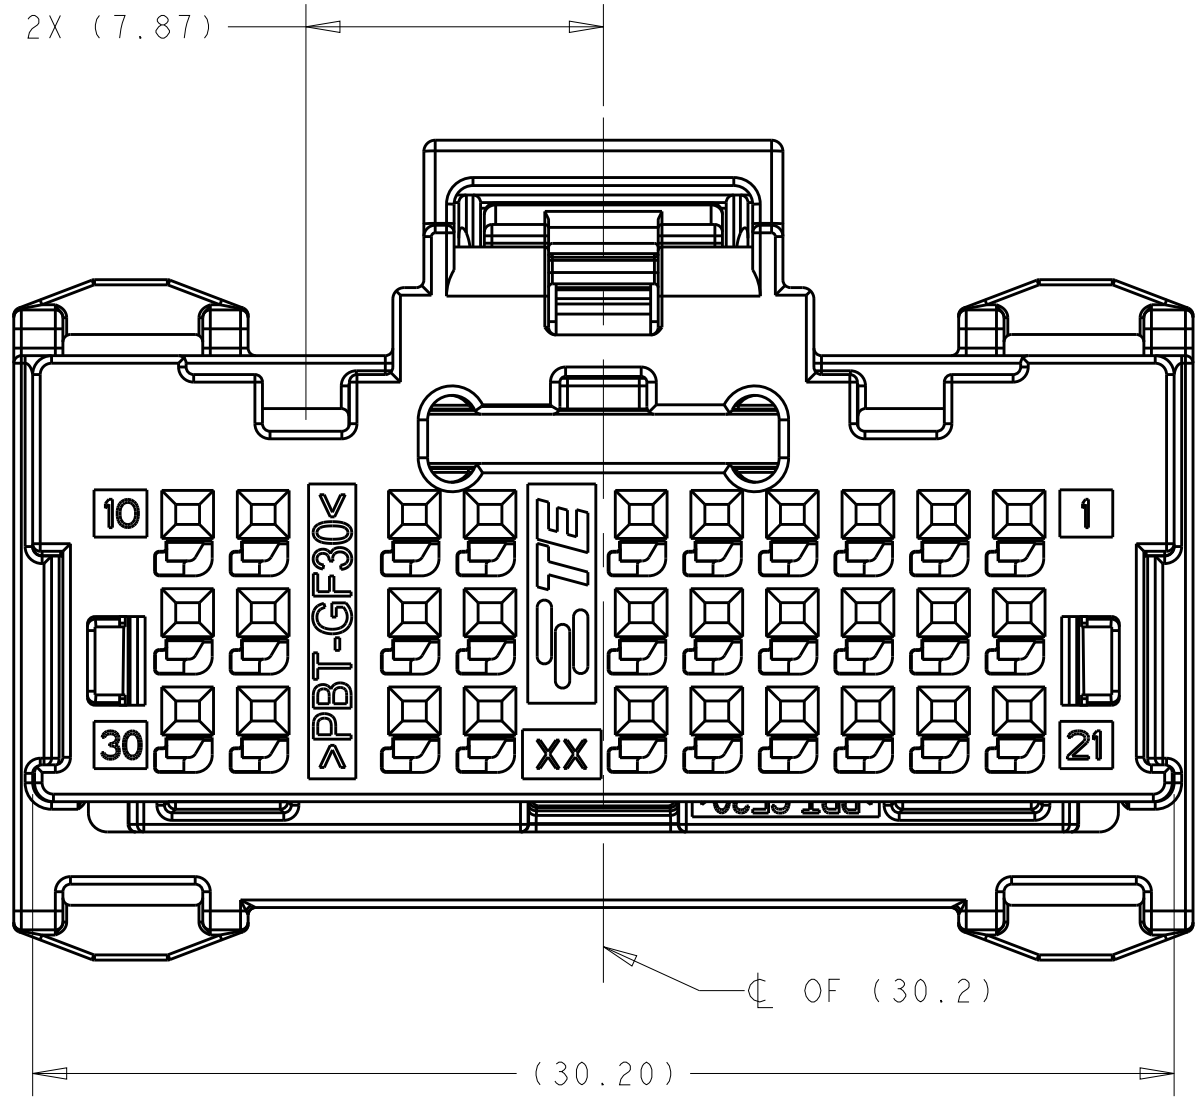


KEY CODE "D"
2309644-4

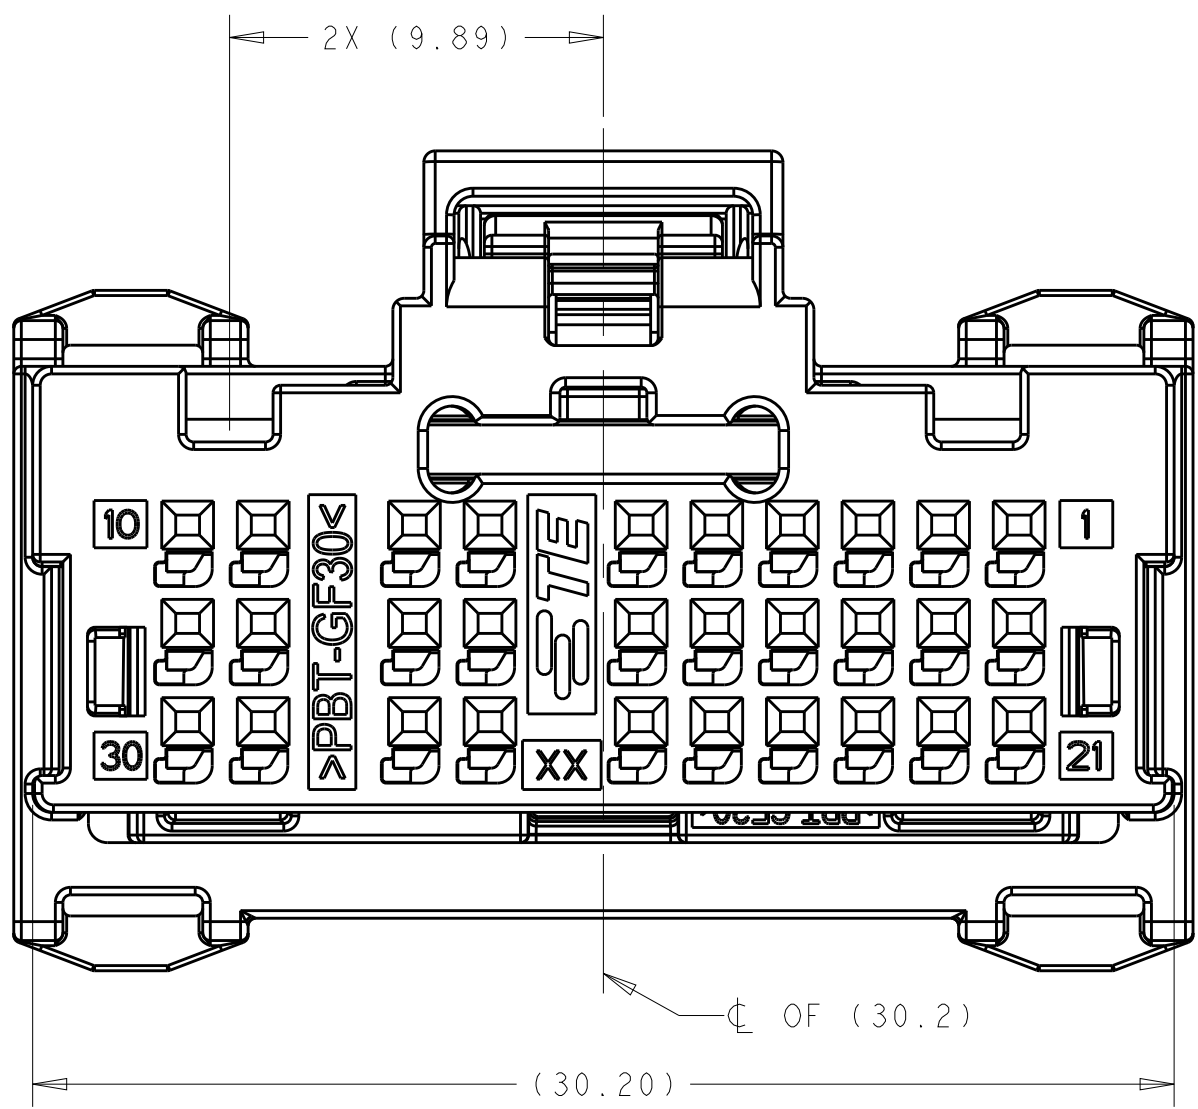


KEYING ARRANGEMENT VIEWS




EXPLODED VIEW

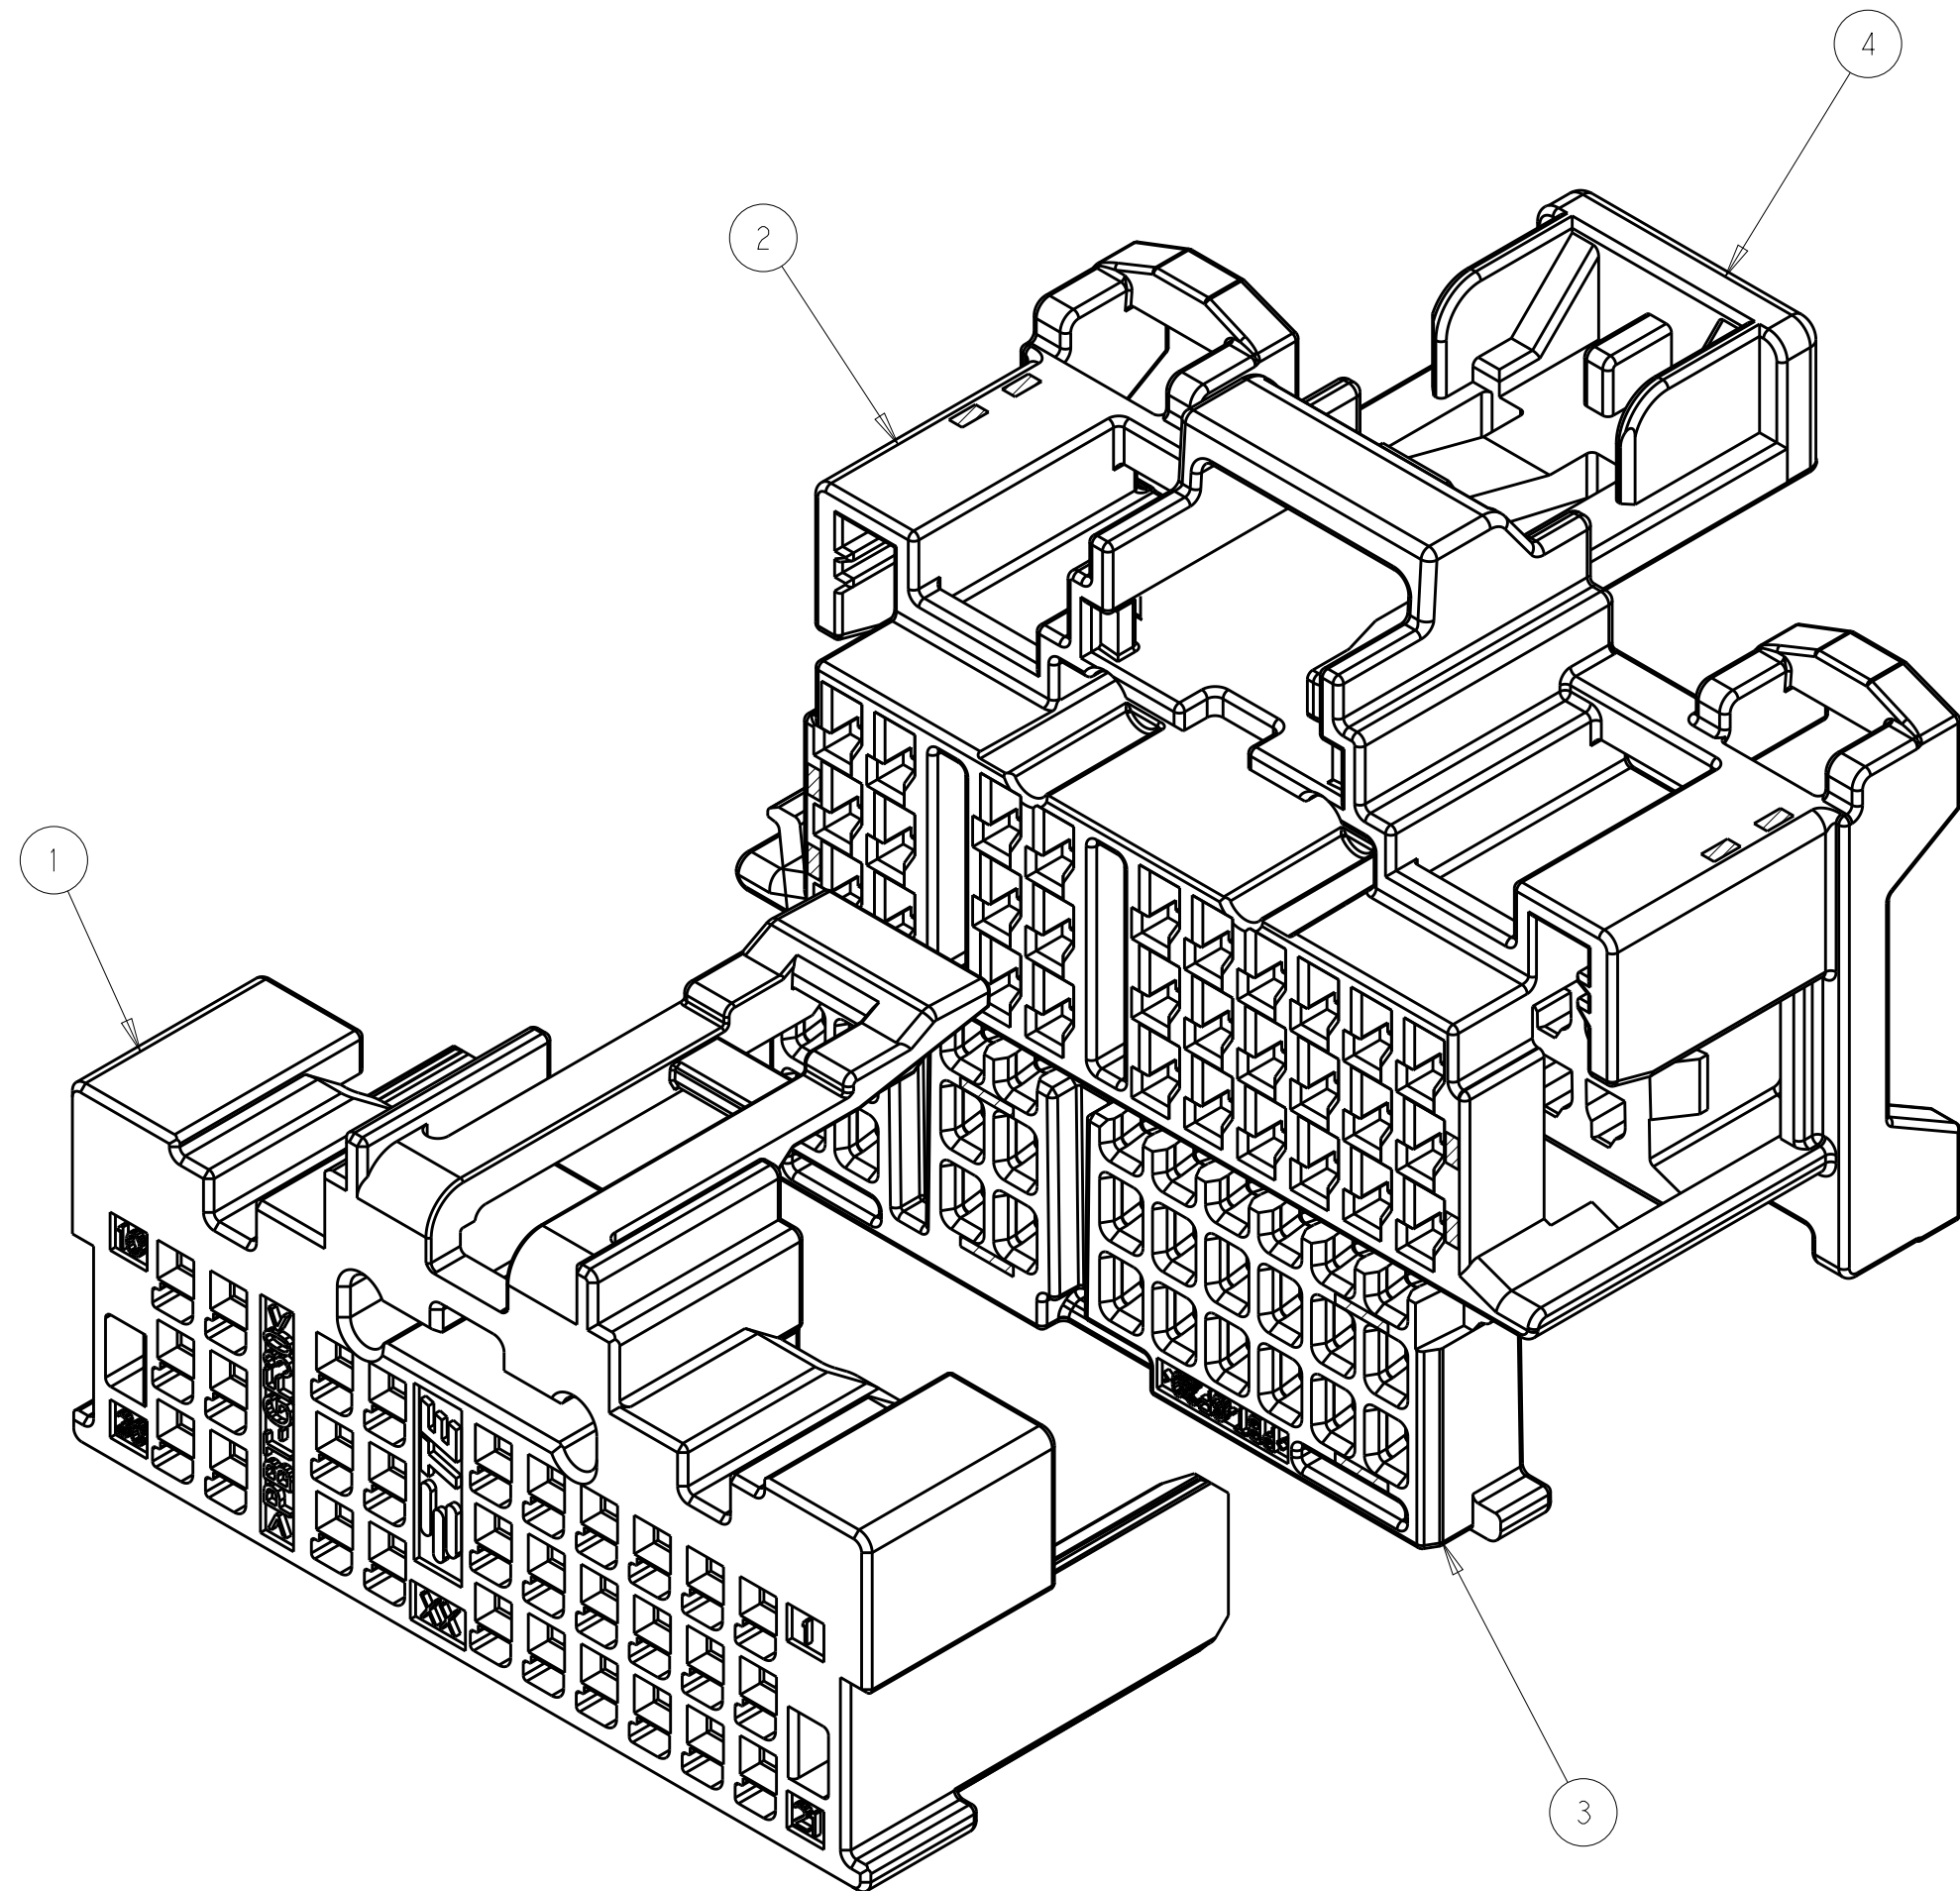

1. 2309644 SHOWN. SEE PART LIST AND KEYING ARRANGEMENT VIEWS TABLE.
2. SECONDARY LOCK IN THE PRE-LOCKED POSITION. IF SECONDARY LOCK CLOSURES DURING SHIPPING, RESET TO PRE-LOCK POSITION.
3. SECONDARY LOCK IN THE LOCKED POSITION.
4. CPA IN THE UNLOCKED POSITION.
5. CPA IN LOCKED POSITION.
6. CIRCUIT I.D.
7. TO BE USED WITH TE TERMINAL PART NUMBER 2272196, SOLD SEPARATELY.
8. OPTIONAL REVERSIBLE WIRE COVER AVAILABLE:
P/N 2300772-1 (TOP EXIT)
P/N 2300842-1 (SIDE EXIT)
9. FOR INFORMATION ON USAGE REFERENCE INSTRUCTION SHEET 408-32188
10. PN 2300772-1 AND 2300842-1 WIRE DRESS COVERS ARE TO BE USED AS PER USCAR-25 RECOMMENDATION. FOR ADDITIONAL APPLICATION INFORMATION PLEASE CONTACT TE CONNECTIVITY.

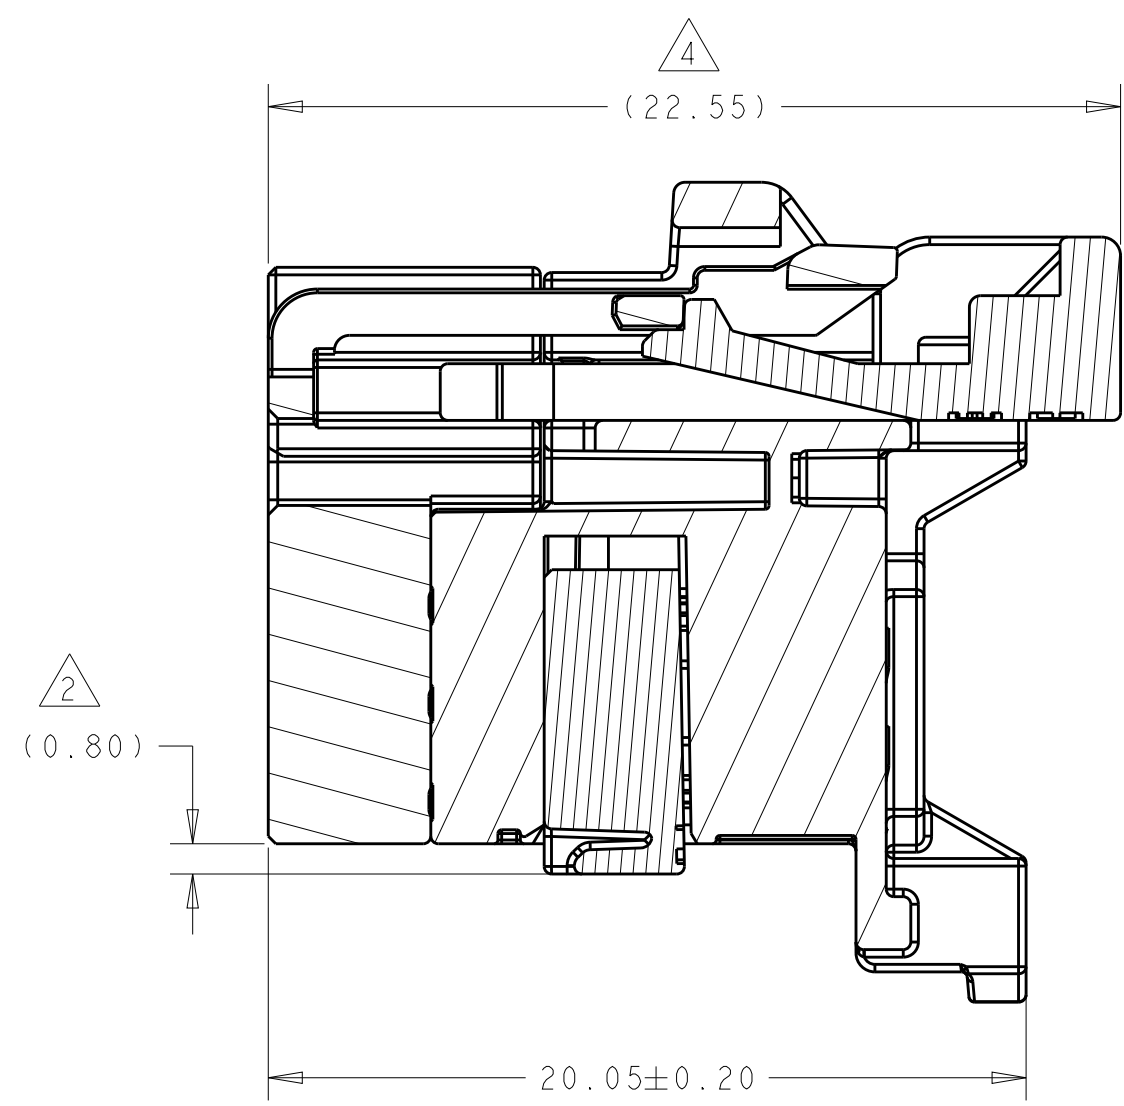

SECTION D-D

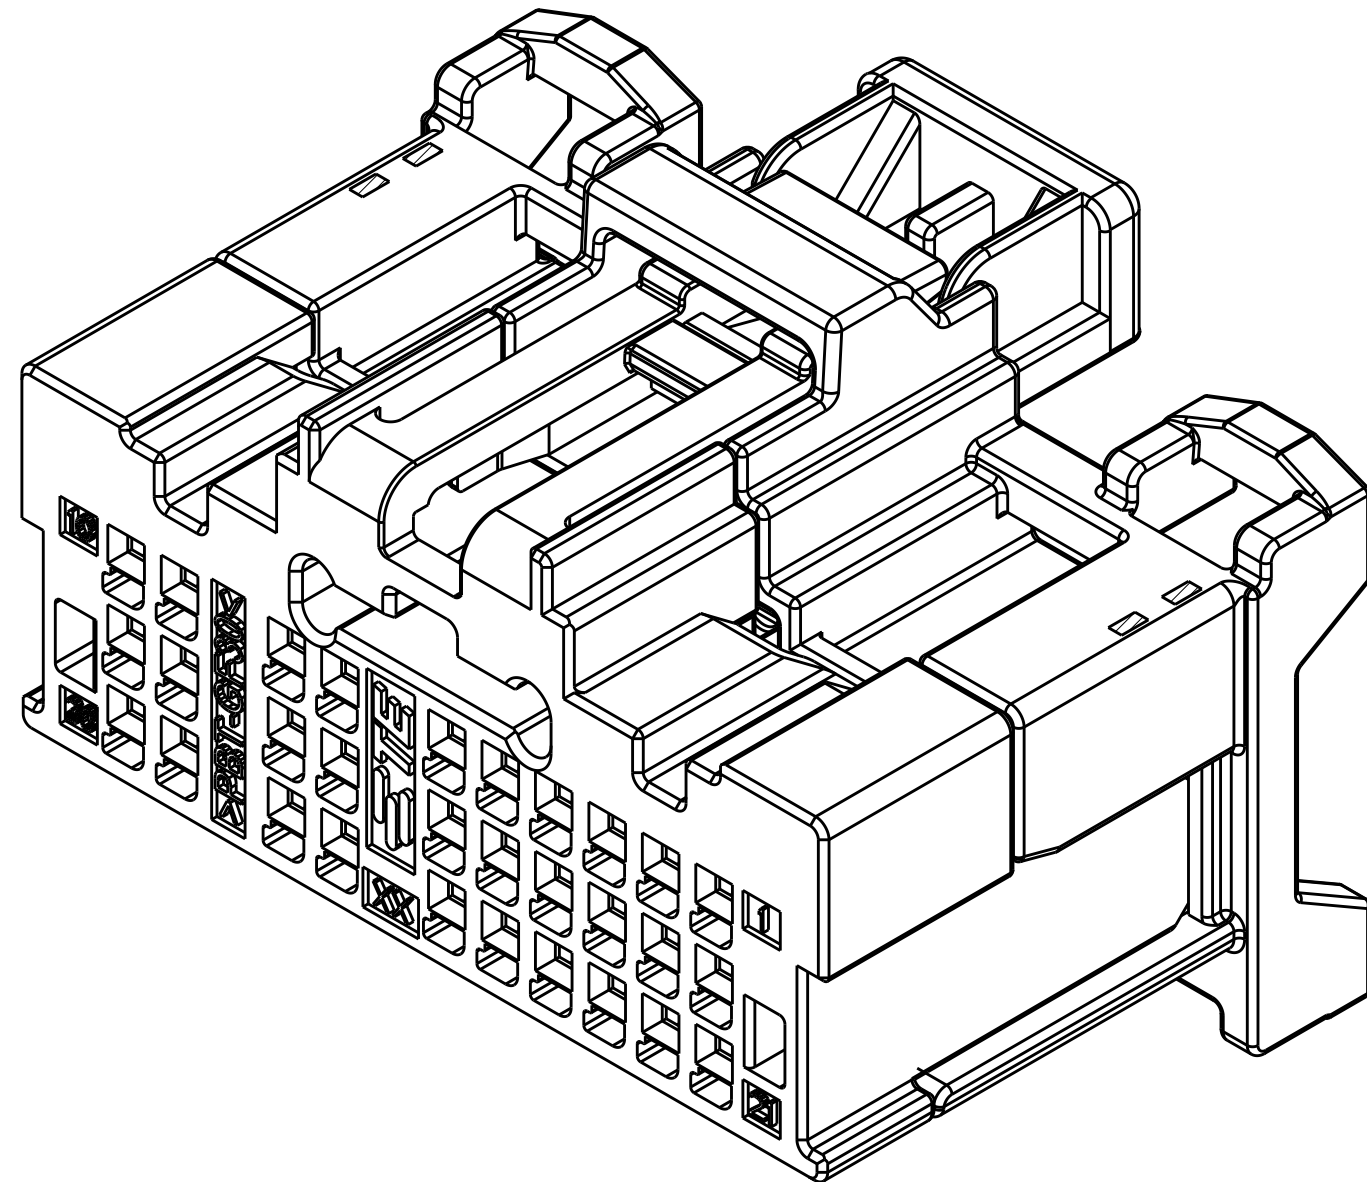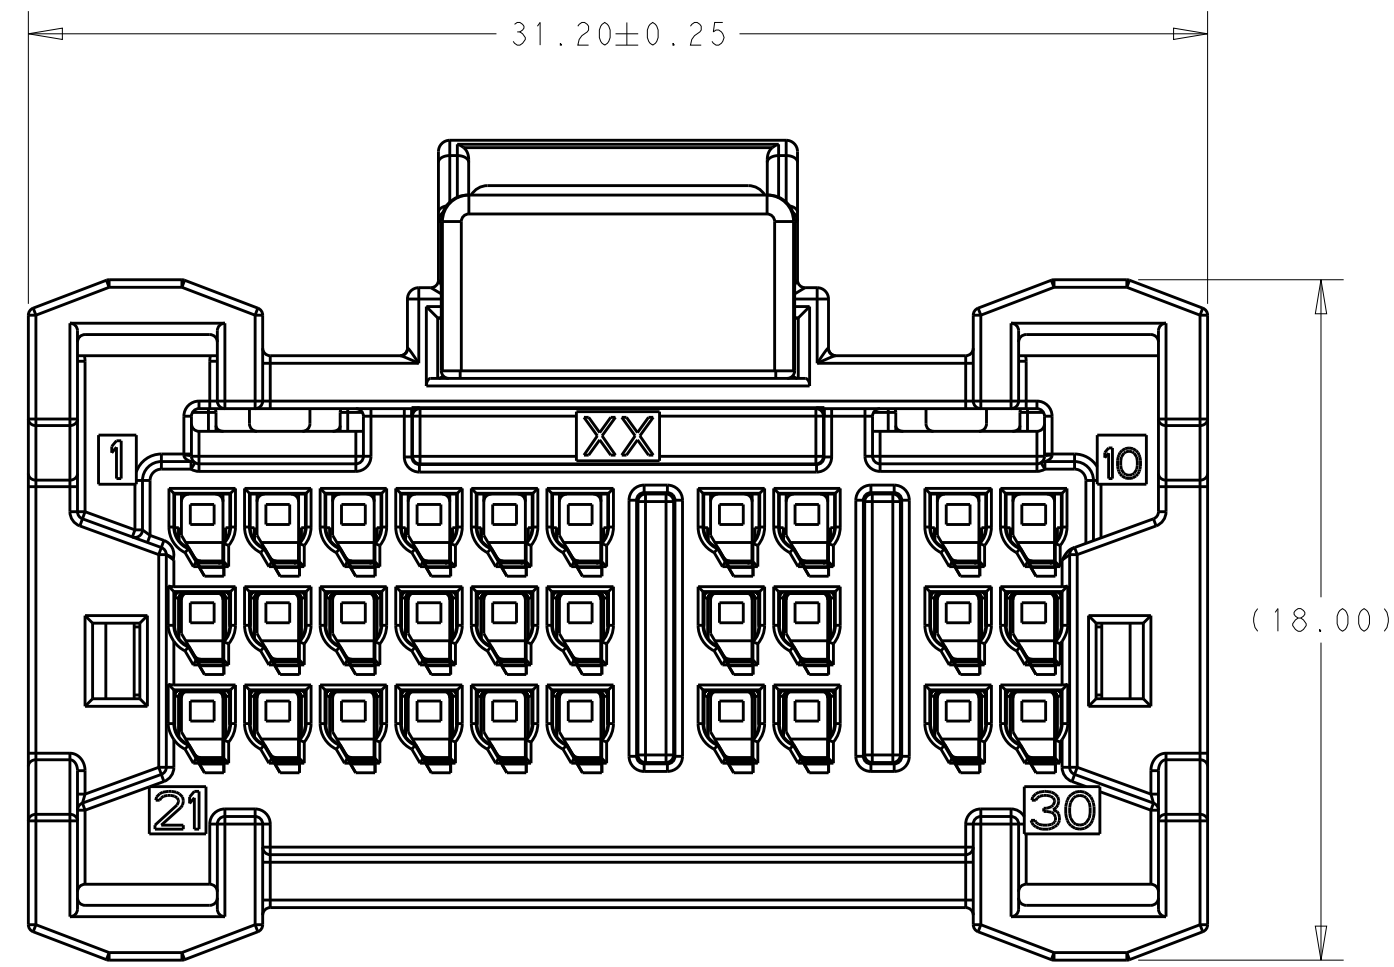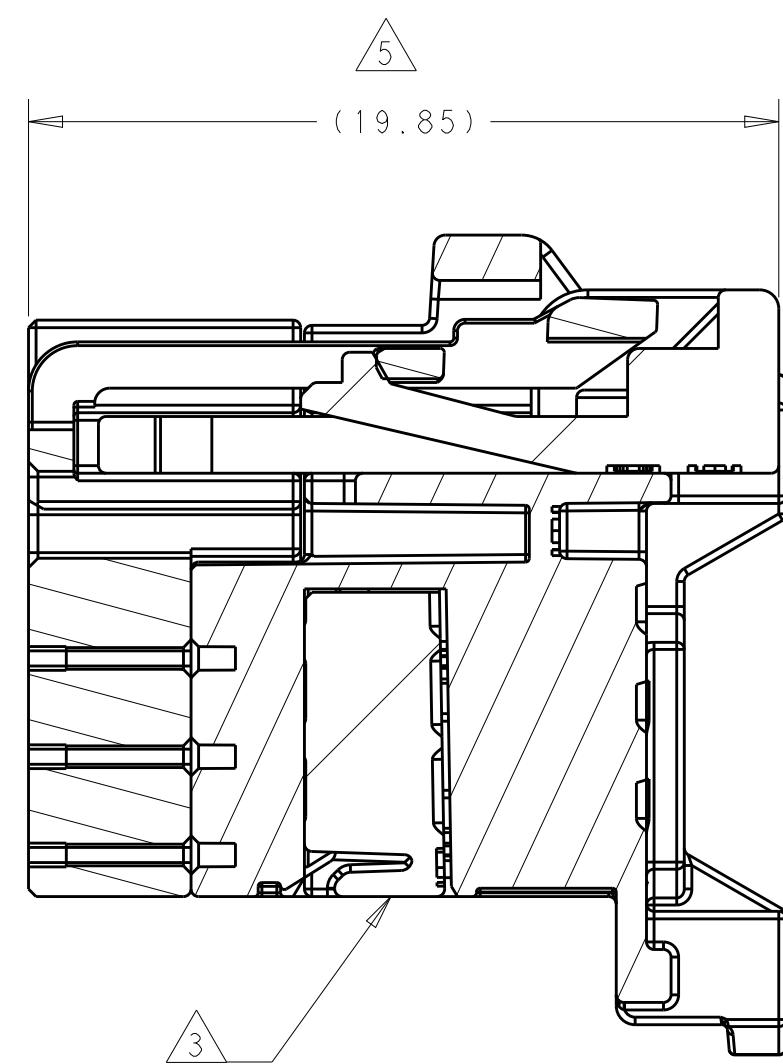

1	1	1	1	CPA	4
1	1	1	1	SECONDARY LOCK	3
1	1	1	1	BACK HOUSING	2
1	-	-	-	FRONT HOUSING CODE D	1
-	1	-	-	FRONT HOUSING CODE C	1
-	-	1	-	FRONT HOUSING CODE B	1
-	-	-	1	FRONT HOUSING CODE A	1
2309644-4	2309644-3	2309644-2	2309644-1	DESCRIPTION	ITEM NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.				TE Connectivity	
DIMENSIONS: (mm)				30P NANOMOS/050LL CONNECTOR WITH CPA	
MATERIAL: -				SCALE: 5:1	
FINISH: -				SHEET 1 OF 1	
WEIGHT: 5.04g				REV B	
CUSTOMER DRAWING					