




Automotive Parts > Automotive Connectors > Automotive Housings

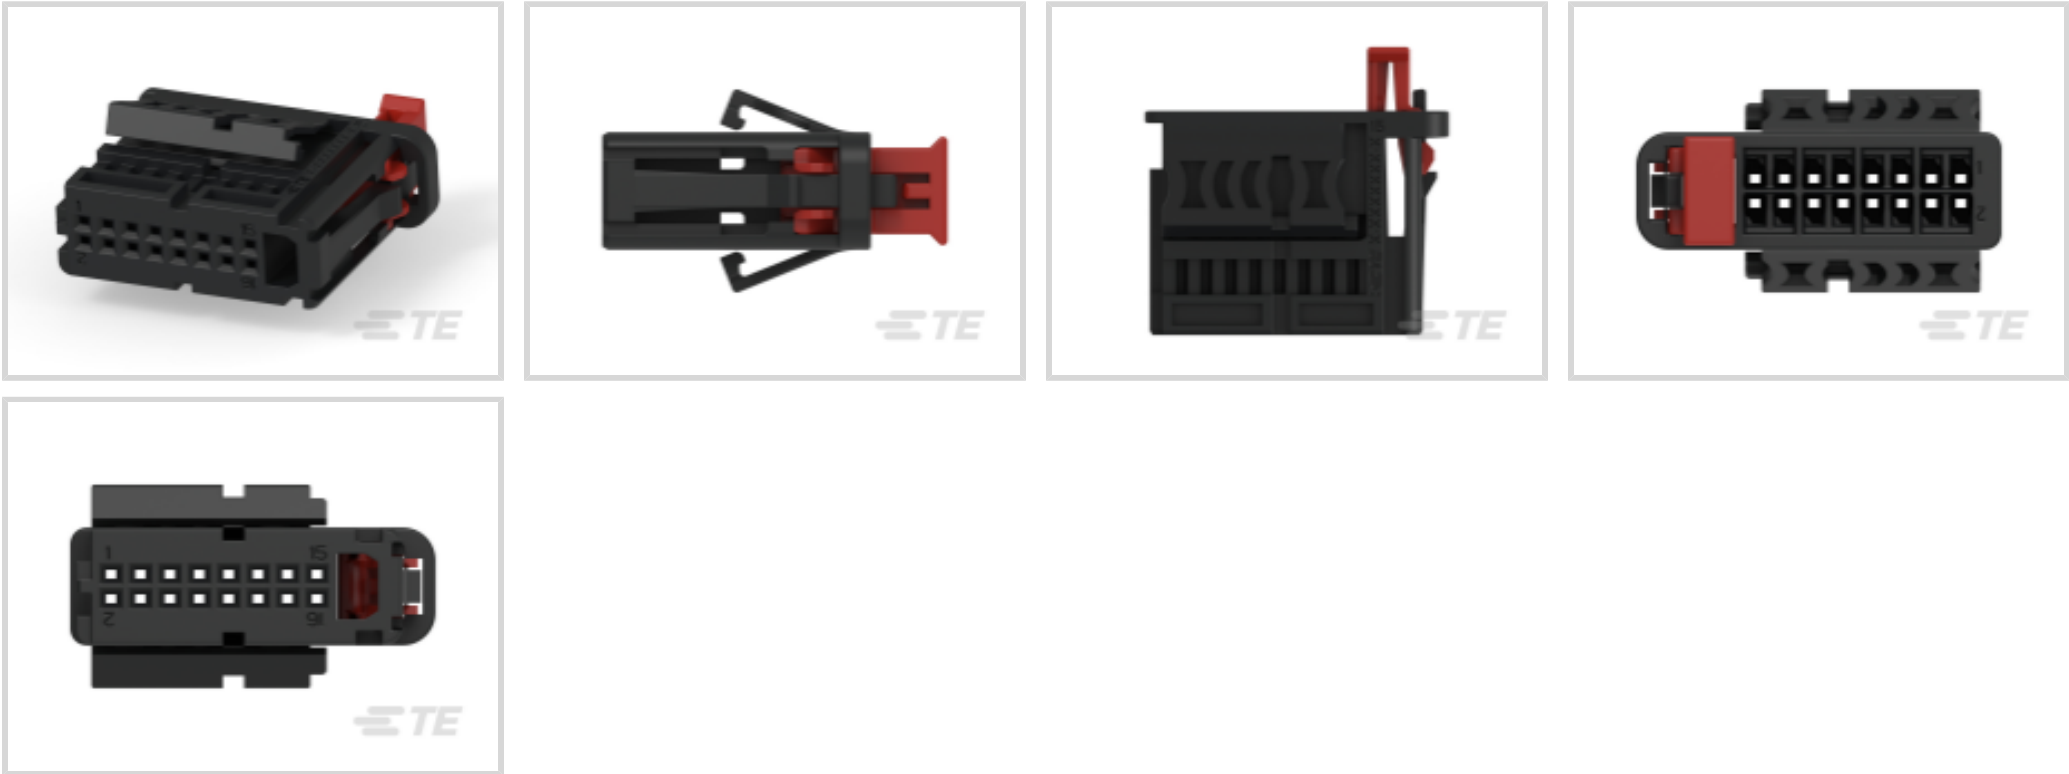

Nominal Voltage Architecture: 12 V

Connector & Housing Type: **Housing for Female Terminals**

Number of Positions: **16**

Sealable: **No**

Operating Temperature Range: **-40 – 105 °C [-40 – 221 °F]**

Features

Product Type Features

Connector Shape	Rectangular
Mixed & Hybrid Connector	No
Connector & Housing Type	Housing for Female Terminals
Sealable	No
Primary Locking Feature	Locking Lance
Connector System	Cable-to-Board, Cable-to-Cable
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	16
Number of Rows	2

Electrical Characteristics

Nominal Voltage Architecture	12 V
------------------------------	------

Body Features

Primary Product Color	Black
-----------------------	-------



Connector & Keying Code	A
Contact Features	
Contact Size	.5mm
Contact Type	Receptacle
Mating Tab Width	.5 mm[.019 in]
Contact Current Rating (Max)	3 A
Mechanical Attachment	
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	PBT GF10
Centerline (Pitch)	1.8 mm[.071 in]
Usage Conditions	
Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]
Operating Temperature (Max)	105 °C[221 °F]
Operation/Application	
Circuit Application	Signal
Other	
Connector Position Assurance Capable	Yes
Product Compliance	
For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Not reviewed for solder process capability



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # CAT-M8793-T273
MQS, RECEPTACLE AND TAB

Also in the Series | Nano MQS

Automotive Connector Caps & Covers
(2)

Automotive Connector Locks & Position Assurance(3)

Automotive Housings(118)

Automotive Signal & Power Headers
(60)

Automotive Terminals(11)

Customers Also Bought



TE Part #165301
SOLIS DIN 4.0-6.0 R M4




TE Part #205842-1
CPC PLUG ASSEMBLY SIZE 23-63



TE Part #1241152-3
3P HV100 REC. CON, SMD, GOLD, BLISTER



TE Part #2-1418639-5
2POS MQS REC COD B

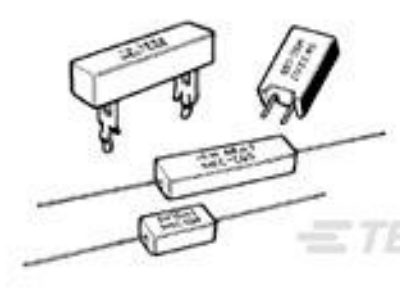


TE Part #3-1623789-4
SQM7 8R2 5% (WIRE)



TE Part #4-1625868-9
RP 2A 0.25W 16R9 0.1% 25PPM 1K RL



TE Part #2301995-4
RJ45 JACK INT.MAG. 1GB LED 1X1 VERT.

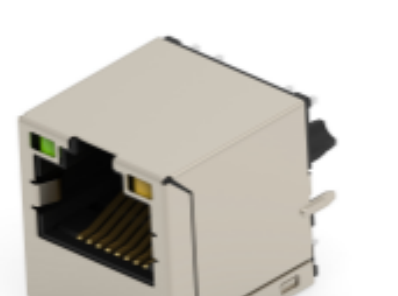

TE Part #5-2301995-4
RJ45 JACK INT.MAG. 1GB LED 1X1 VERT.



TE Part #2312112-1
12POS,NANOMQS,REC HSG ASSY, COD A



TE Part #2312120-1
20POS,NANOMQS,REC HSG ASSY, COD A

Documents

Product Drawings

16POS,NANOMQS,REC HSG ASSY,COD A

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2312116-1_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2312116-1_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2312116-1_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications



Application Specification

English