



Automotive Parts > Automotive Connectors > Automotive Housings



Nominal Voltage Architecture: 12 V

Connector & Housing Type: **Receptacle**

Number of Positions: 4

Sealable: **No**

Operating Temperature Range: -40 – 105 °C [-40 – 221 °F]

Features

Product Type Features

Connector Shape	Rectangular
Mixed & Hybrid Connector	No
Connector & Housing Type	Receptacle
Sealable	No
Primary Locking Feature	Locking Lance
Connector System	Cable-to-Board, Cable-to-Cable
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	4
Number of Rows	2

Electrical Characteristics

Nominal Voltage Architecture	12 V
------------------------------	------

Body Features

Primary Product Color	Black
-----------------------	-------



Connector & Keying Code	A
Contact Features	
Contact Size	.4mm, .5mm
Contact Type	Receptacle
Mating Tab Width	.5 mm[.02 in]
Contact Current Rating (Max)	3 A
Mechanical Attachment	
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	PBT GF10
Centerline (Pitch)	1.8 mm[.071 in]
Usage Conditions	
Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]
Operating Temperature (Max)	105 °C[221 °F]
Operation/Application	
Circuit Application	Signal
Other	
Connector Position Assurance Capable	No
Product Compliance	
For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC



Free

Solder Process Capability

Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




TE Part # CAT-N53-AT050

0.50 mm Automation Ready Terminals for Automotive Wire Harness Production and Scalable Assembly Automation

Also in the Series | Nano MQS



Automotive Connector Caps & Covers (2)

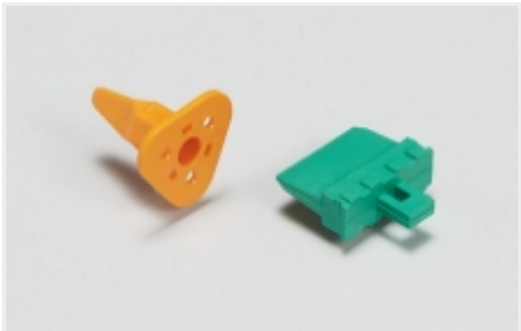


Automotive Connector Locks & Position Assurance(3)



Automotive Housings(118)




Automotive Signal & Power Headers (61)

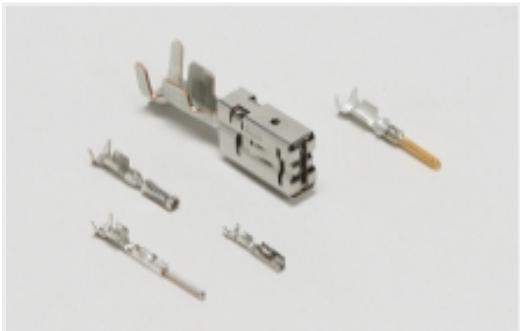

Automotive Terminals(11)

Customers Also Bought




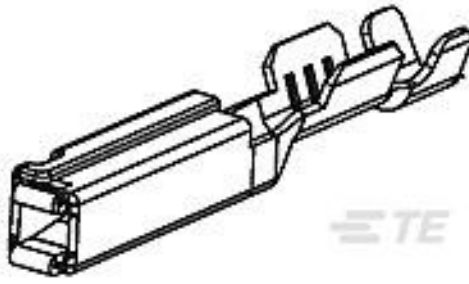

TE Part #1393364-1
V23540X7000Y10=GET-FEM TERM AU



TE Part #2-1703930-4
NANOMQS, RECEPTACLE TERMINAL

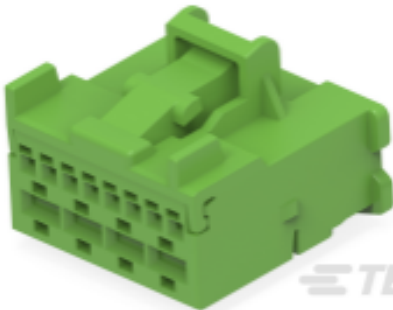


TE Part #2322347-3
12POS, HYBRID, REC HSG, UNSLD, COD 3




TE Part #1-2392850-1
21POS, AMP MCP 2.8, REC HSG, UNSLD, COD A




TE Part #1-2355507-1
3POS, MCON 1.2, REC HSG ASSY, SLD, COD A

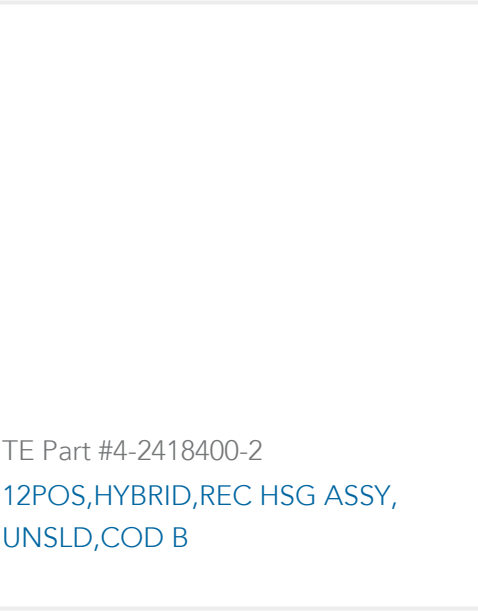


TE Part #4-2418400-2
12POS, HYBRID, REC HSG ASSY, UNSLD, COD B

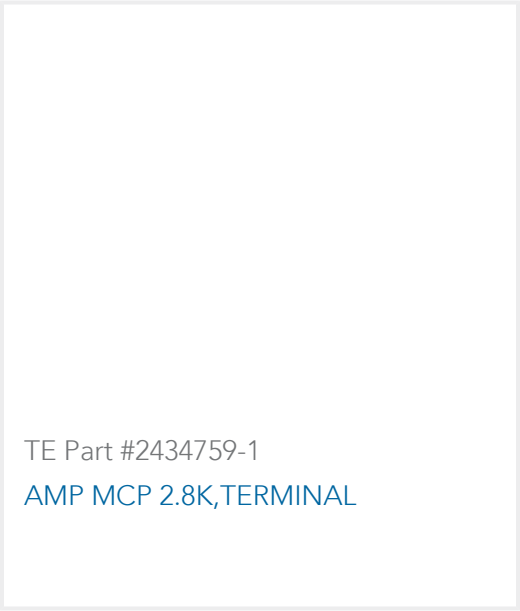


TE Part #2434759-1
AMP MCP 2.8K, TERMINAL

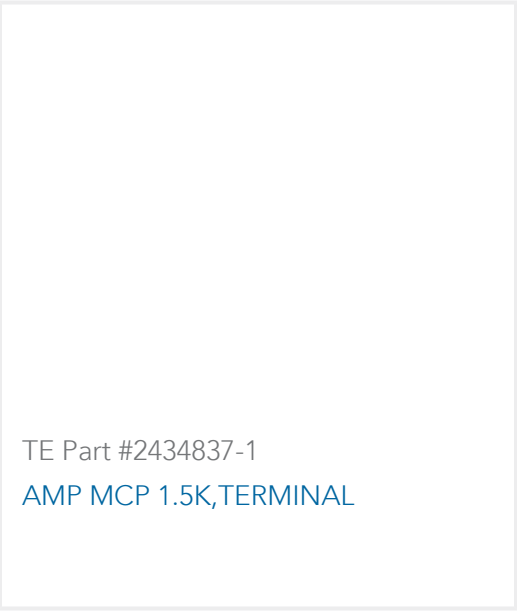

TE Part #2434837-1
AMP MCP 1.5K, TERMINAL

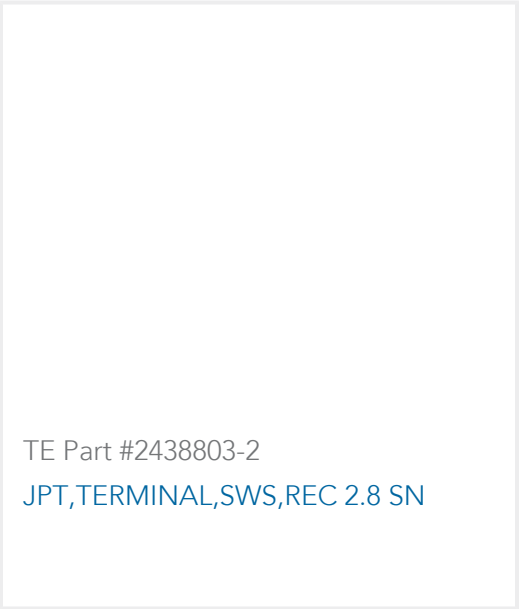

TE Part #2438803-2
JPT, TERMINAL, SWS, REC 2.8 SN

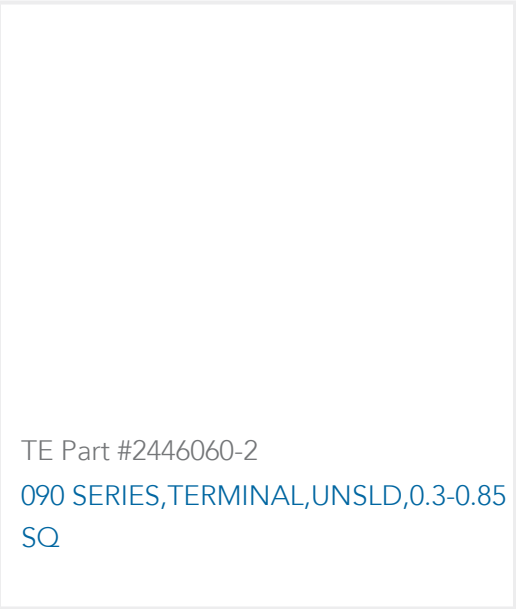

TE Part #2446060-2
090 SERIES, TERMINAL, UNSLD, 0.3-0.85 SQ

Documents

Product Drawings
4POS,NANOMQS,REC HSG,COD A
English

CAD Files
3D PDF
3D
Customer View Model
ENG_CVM_CVM_2320004-1_A.2d_dxf.zip
English
Customer View Model
ENG_CVM_CVM_2320004-1_A.3d_igs.zip
English
Customer View Model
ENG_CVM_CVM_2320004-1_A.3d_stp.zip
English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications



Application Specification

English

Application Specification

English