




MTA 156

TE Internal #: 2-647127-2

PCB Mount Header, Vertical, Wire-to-Board, 2 Position, 3.96 mm [.156 in] Centerline, Fully Shrouded, Tin (Sn), Through Hole - Solder, Power, MTA 156

[View on TE.com >](#)

Connectors > PCB Connectors > PCB Headers & Receptacles

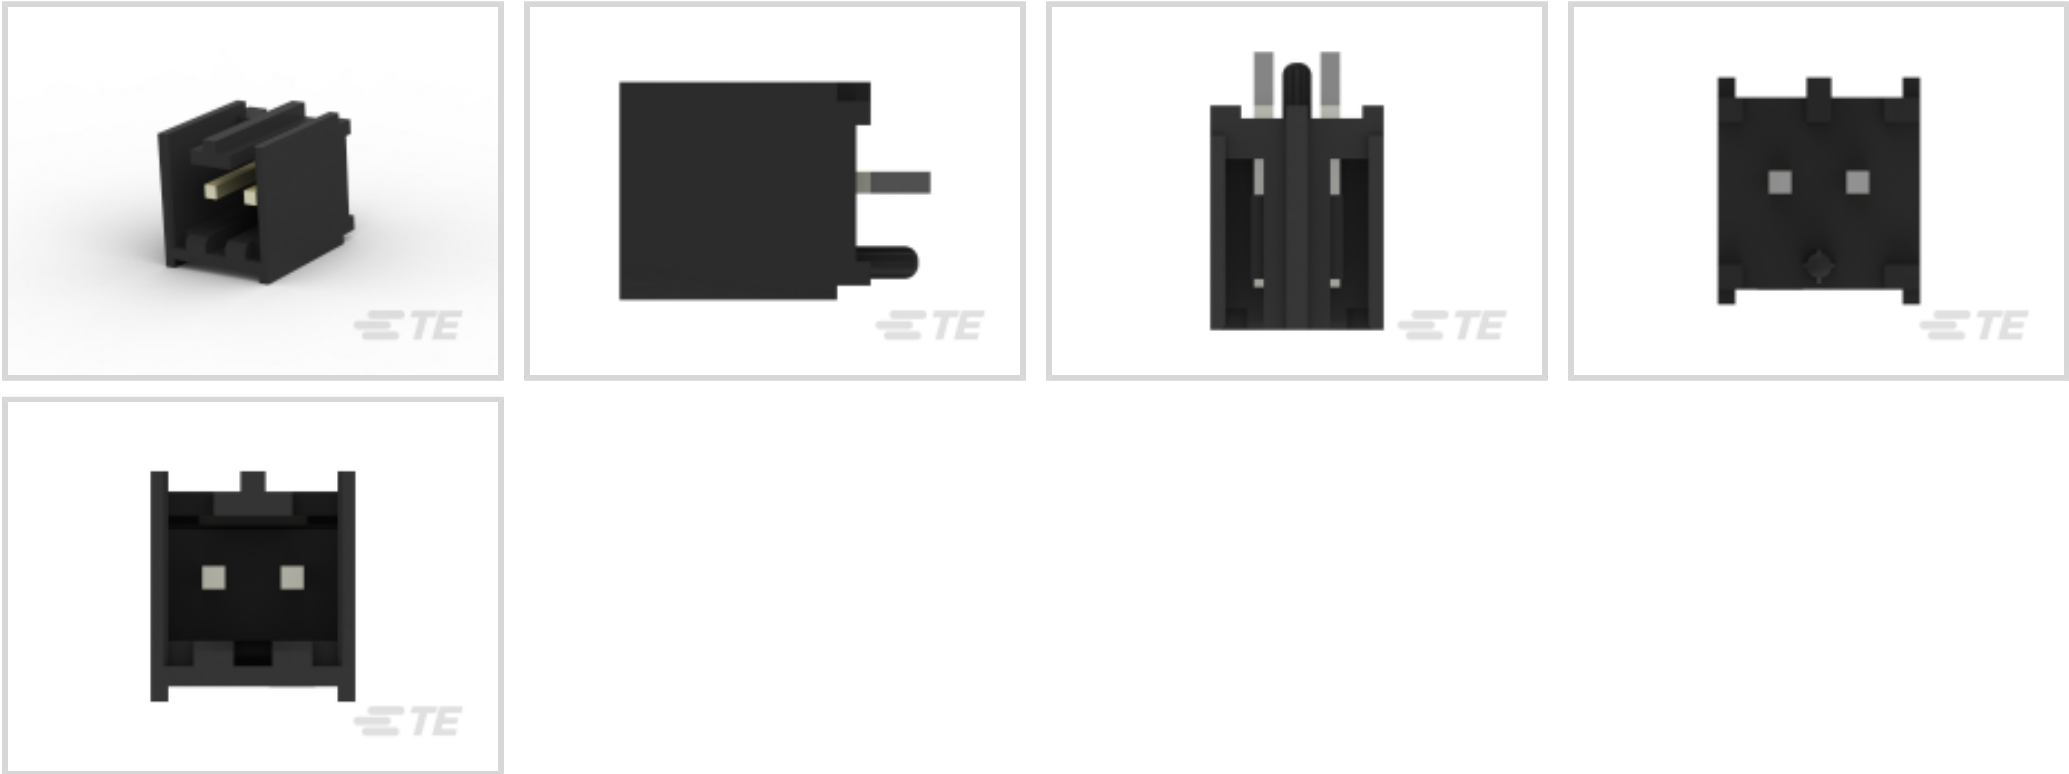

PCB Connector Type: **PCB Mount Header**

PCB Mount Orientation: **Vertical**

Connector System: **Wire-to-Board**

Number of Positions: **2**

Centerline (Pitch): **3.96 mm [.156 in]**

Features

Product Type Features

Mixed & Hybrid Header	No
Connector Shape	Rectangular
PCB Connector Type	PCB Mount Header
Connector System	Wire-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Connector Product Type	Connector Assembly

Configuration Features

Connector Contact Load Condition	Fully Loaded
Number of Columns	2
Number of Loaded Positions	2
PCB Mount Orientation	Vertical
Number of Positions	2



Number of Rows	1
Number of Power Positions	2

Electrical Characteristics

Operating Voltage	600 VAC
-------------------	---------

Body Features

Connector Profile	Standard
Primary Product Color	Black

Contact Features

Contact Underplating Material	Nickel
Contact Underplating Material Thickness	1.27 μm[50 μin]
Contact Size	1.14mm
Mating Square Post Dimension	1.14 mm[.045 in]
Contact Base Material	Copper Alloy
PCB Contact Termination Area Plating Material Finish	Matte
PCB Contact Termination Area Plating Material Thickness	3.81 – 8.89 μm[150 – 350 μin]
Contact Shape & Form	Square
Contact Layout	Inline
Contact Mating Area Length	7.62 mm[.3 in]
Contact Mating Area Plating Material	Tin (Sn)
Contact Mating Area Plating Material Finish	Matte
Contact Mating Area Plating Material Thickness	3.81 – 8.89 μm[150 – 350 μin]
Contact Type	Tab
Contact Current Rating (Max)	14.24 A
PCB Contact Termination Area Plating Material	Tin

Termination Features

Square Termination Post & Tail Dimension	1.14 mm[.045 in]
Termination Post & Tail Length	3.18 mm[.125 in]
Termination Method to PCB	Through Hole - Solder

Mechanical Attachment

Panel Mount Feature	Without
Mating Alignment Type	Polarization
PCB Mount Retention Type	Tab



Mating Retention Type	Latch Detent
PCB Mount Alignment Type	Pegs
PCB Mount Alignment	With
Mating Retention	With
PCB Mount Retention	With
Connector Mounting Type	Board Mount
Mating Alignment	With

Housing Features

Mating Entry Location	Top
Centerline (Pitch)	3.96 mm[.156 in]
Housing Material	Thermoplastic Polyester GF

Dimensions

Connector Width	11.56 mm[.455 in]
Connector Height	13.34 mm[.525 in]
Connector Length	10.31 mm[.406 in]
PCB Thickness (Recommended)	1.57 mm[.062 in]

Usage Conditions

Operating Temperature (Max)	105 °C[221 °F]
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

Compatible With Agency/Standards Products	CSA, UL
UL Rating	Recognized
Compatible With Approved Standards Products	UL E28476
Glow Wire Rating	Standard Part - Not Glow Wire
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	1
Packaging Method	Package

Product Compliance

For compliance documentation, visit the product page on TE.com>



EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 240°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 3-640435-2
02P MTA156 CONN ASSY 26AWG LF



TE Part # 3-640429-2
02P MTA156 CONN ASSY 24AWG WHT




TE Part # 3-644462-2
02P MTA156 CONN ASSY 20AWG LF



TE Part # 3-644465-2
02P MTA156 CONN ASSY 18AWG ORA



TE Part # 3-643817-2
02P MTA156 CONN ASSY 18AWG ORA

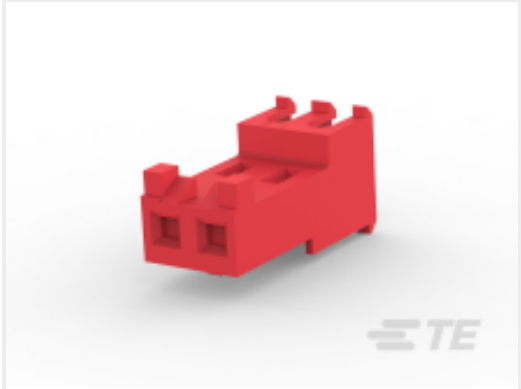

TE Part # 3-644467-2
02P MTA156 CONN ASSY 22AWG LF



TE Part # 3-644464-2
02P MTA156 CONN ASSY 24AWG LF



TE Part # 3-643821-2
02P MTA156 CONN ASSY 26AWG LF



TE Part # 643067-2
02P MTA156 MOLDED COVER

TE Part # 3-640600-2
02P MTA156 CONN ASSY 20AWG LF

TE Part # 3-640604-2
02P MTA156 CONN ASSY 18AWG LF

TE Part # 3-643819-2
02P MTA156 CONN ASSY 22AWG RED

TE Part # 641533-1
02P MTA156 CONN HSG,END CAP

TE Part # 3-644860-2
02P MTA156 CONN ASSY 18AWG LF

TE Part # CAT-103156-WBHSM
Receptacle Housing: Wire-to-Board,
with Mating Alignment, SL156

TE Part # 3-644570-2
02P MTA156 CONN ASSY 18AWG LF

TE Part # 3-640426-2
02P MTA156 CONN ASSY 18AWG
ORA

TE Part # 3-640601-2
02P MTA156 CONN ASSY 22AWG LF

TE Part # 3-640606-2
02P MTA156 CONN ASSY 22AWG LF

TE Part # 3-644463-2
02P MTA156 CONN ASSY 22AWG RED

Also in the Series | **MTA 156**

Connector Caps & Covers(89)

Connector Contacts(4)

Connector Hardware(2)

Power Contacts(3)

Rectangular Power Connectors(1178)

Standard Rectangular Connectors(667)

Wire-to-Board Connector Assemblies
& Housings(594)

Customers Also Bought





TE Part #1028-027-0405
BKSHL, 4P, BLK, REC, ST, NW 7.5/8.5



TE Part #1028-041-0205
BKSHL, 2P, BLK, PLG, ST, NW 8.5




TE Part #1028-021-0205
BKSHL, 2P, BLK, REC, ST, NW 7.5/8.5



TE Part #350428-1
02P UMNL PIN HDR ASSY NATL




TE Part #350789-1
03P UMNL PIN HDR ASSY 94VO

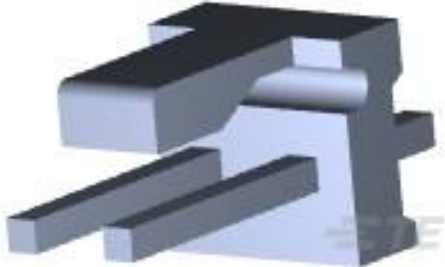


TE Part #640445-2
02P MTA156 HDR ASSY FL/STR SN



TE Part #1609112-1
10CBE1=F7890 M0

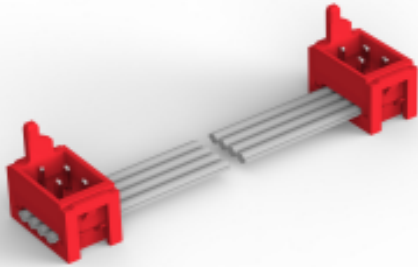

TE Part #CAT-M5833-C1121
MICRO-MATCH STD MOW TO MOW CABLE ASSY

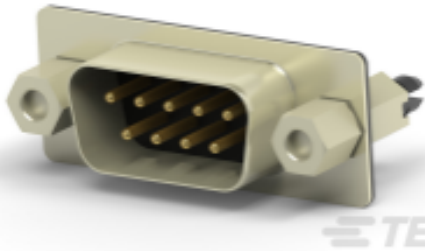

TE Part #2301826-2
AMPL PLUG HD20, VERT, 9P, B/L,4-40 S/LOC

Documents

Product Drawings

02P MTA156 SHRD HDR ASSY LF

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-647127-2_C.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2-647127-2_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-647127-2_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications



Product Specification

English

Product Specification

English