



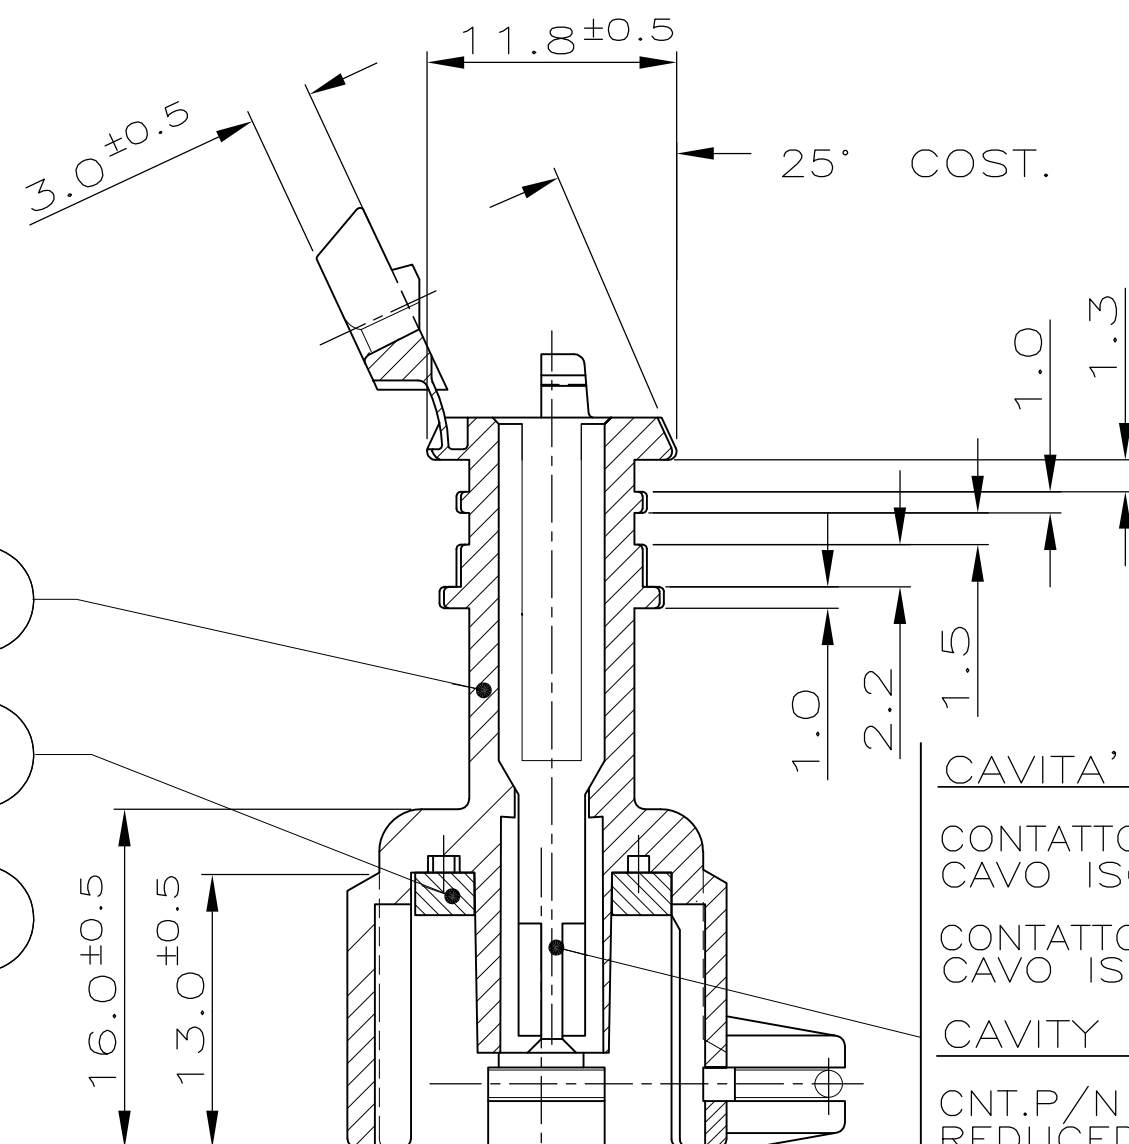

SEZIONE A-A  
(SECTION A-A)

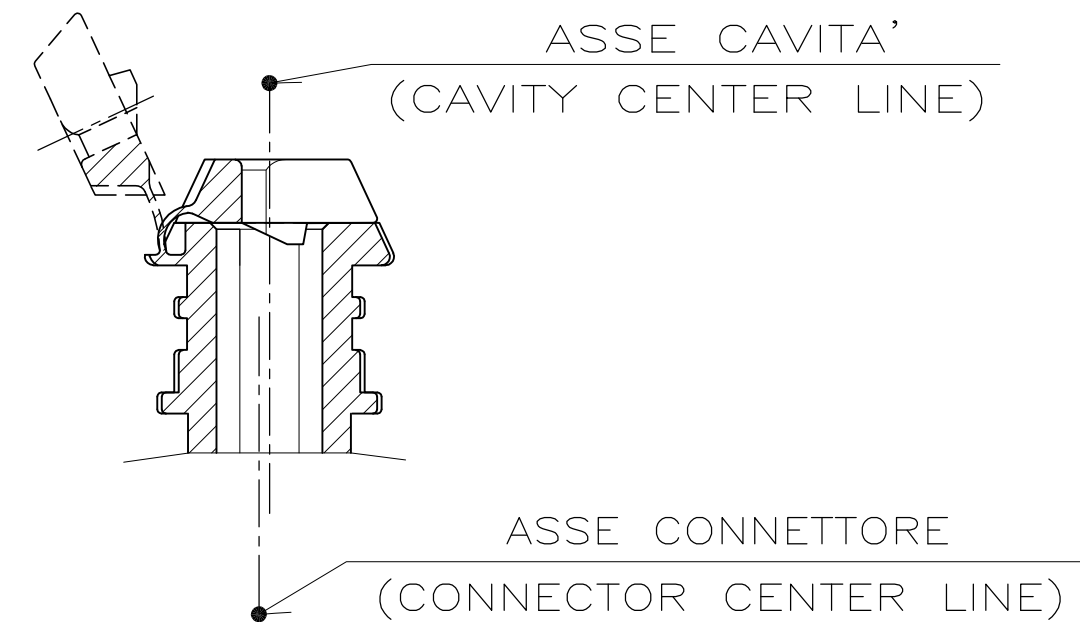

CAVITA' ADATTA PER TERMINALI JUNIOR POWER TIMER:


|                                                |                                                                             |
|------------------------------------------------|-----------------------------------------------------------------------------|
| CONTATTO P/N 929939-1<br>CAVO ISOLANTE RIDOTTO | 0 -3 CON GOMMINO P/N 828904-1<br>Ø1.5-2.1mm; SEZIONE 0.5-1.0mm <sup>2</sup> |
| CONTATTO P/N 929937-1<br>CAVO ISOLANTE RIDOTTO | 0 -3 CON GOMMINO P/N 828905-1<br>Ø2.2-3.0mm; SEZIONE 1.5-2.5mm <sup>2</sup> |

CAVITY SUITABLE FOR JUNIOR POWER TIMER CONTACT:

CNT.P/N 929939-1 OR -3 PLUS WIRE SEAL P/N 828904-1  
REDUCED INS. CABLE Ø1.5-2.1mm; WIRE RANGE 0.5-1.0mm<sup>2</sup>

CNT.P/N 929937-1 OR -3 PLUS WIRE SEAL P/N 828905-1  
REDUCED INS. CABLE Ø2.2-3.0mm; WIRE RANGE 1.5-2.5mm<sup>2</sup>

1) DIFFERISCE DAL ..-1 ESCLUSIVAMENTE PER IL PACKAGING  
 (DIFFERS FROM ..-1 ONLY FOR PACKAGING DETAILS)  
 2) PER DIMENSIONI CONTROPARTE VEDERE FOGLIO 2 .  
 (FOR COUNTERPART DIMENSIONS SEE SHEET 2 ).

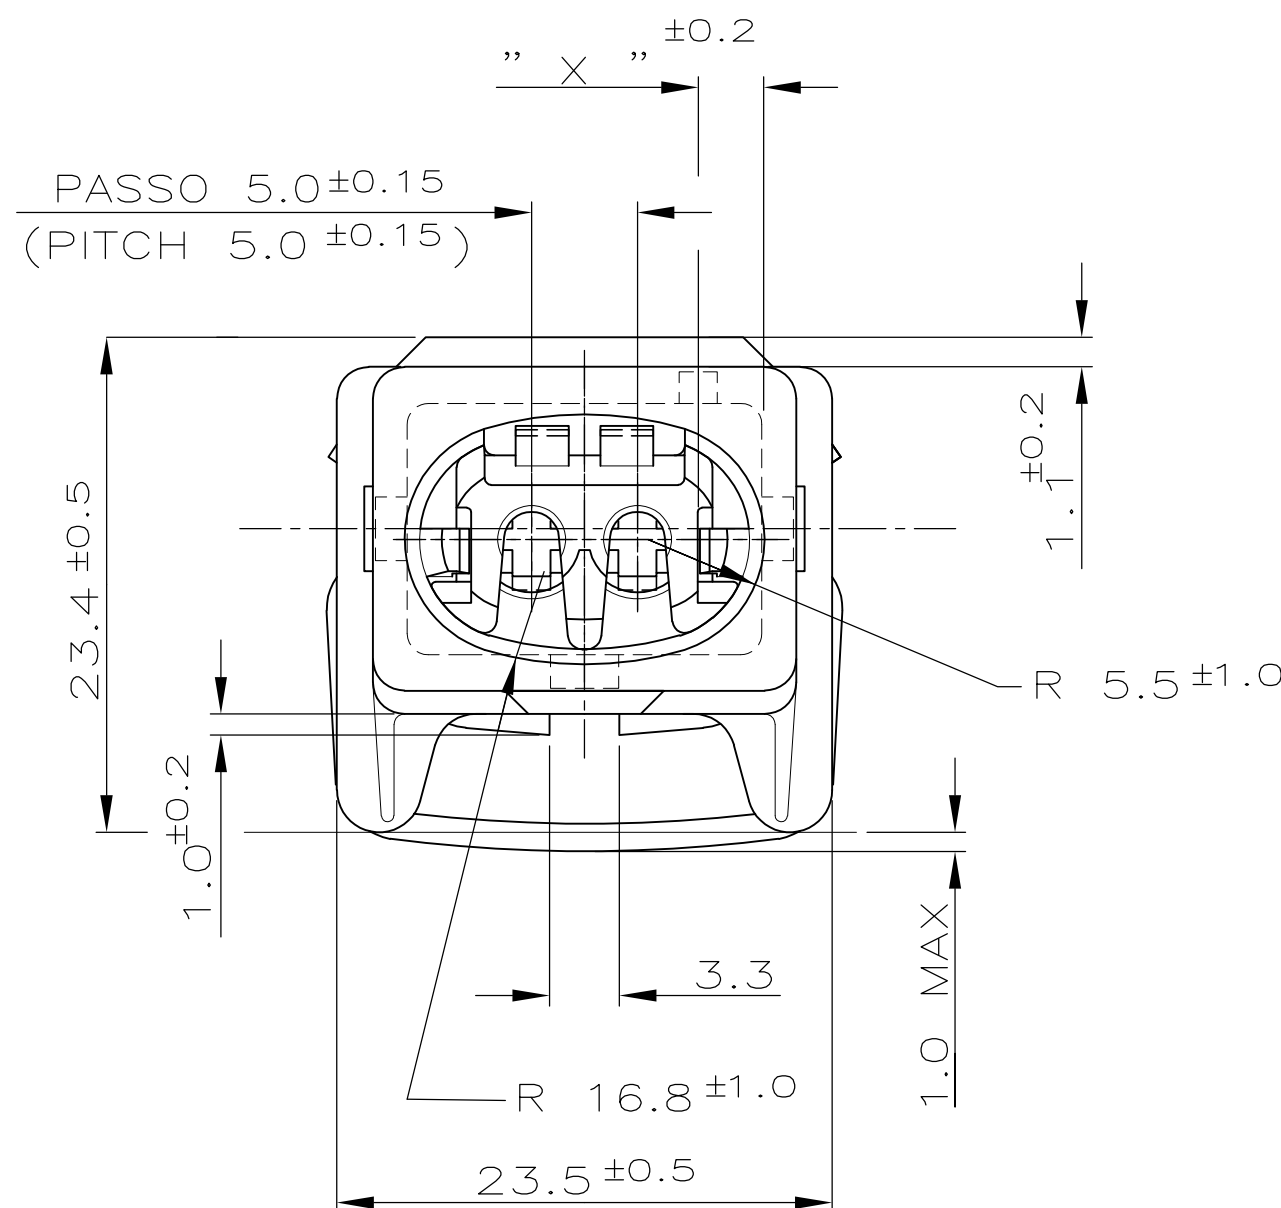

|                                                                                       |  |                                                                                                                                                                                                                     |  |                                                                                                       |  |
|---------------------------------------------------------------------------------------|--|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|-------------------------------------------------------------------------------------------------------|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT.<br>QUESTO DISEGNO E' UN DOCUMENTO CONTROLLATO. |  | DWG / DIS. —<br>CHK / CONT. —                                                                                                                                                                                       |  |  TE Connectivity |  |
| DIMENSIONS:<br>DIMENSIONI:<br>mm                                                      |  | TOLERANCES UNLESS<br>OTHERWISE SPECIFIED:<br>TOLLERANZE SE NON<br>DIVERSAMENTE SPECIFICATO<br>0 PLC / DEC ± —<br>1 PLC / DEC ± 0.3<br>2 PLC / DEC ± —<br>3 PLC / DEC ± —<br>4 PLC / DEC ± —<br>ANGLES / ANGOLI ± 2° |  | NAME<br>NOME<br><br>2 WAY J.P.T. SPLASH PROOF CONN.<br>ASS'Y WITH SECONDARY LOCK                      |  |
|  |  | PRODUCT SPEC<br>SPEC DI PRODOTTO<br>—<br><br>APPLICATION SPEC<br>SPEC DI APPLICAZIONE<br>—                                                                                                                          |  | SIZE<br>CAGE CODE<br>DRAWING NO (MASTER)<br>NUMERO<br>A2 00779 C-282680                               |  |
| MATERIAL<br>MATERIALE<br>—                                                            |  | FINISH<br>FINITURA<br>—                                                                                                                                                                                             |  | WEIGHT<br>PESO<br>—                                                                                   |  |
| 2                                                                                     |  | CUSTOMER DRAWING<br>DISEGNO PER CLIENTE                                                                                                                                                                             |  | SCALE<br>SCALA<br>—                                                                                   |  |
|                                                                                       |  | SHEET<br>FOGLIO<br>1 of 2                                                                                                                                                                                           |  | REV<br>D1                                                                                             |  |

