


S

WAS P-73-6103

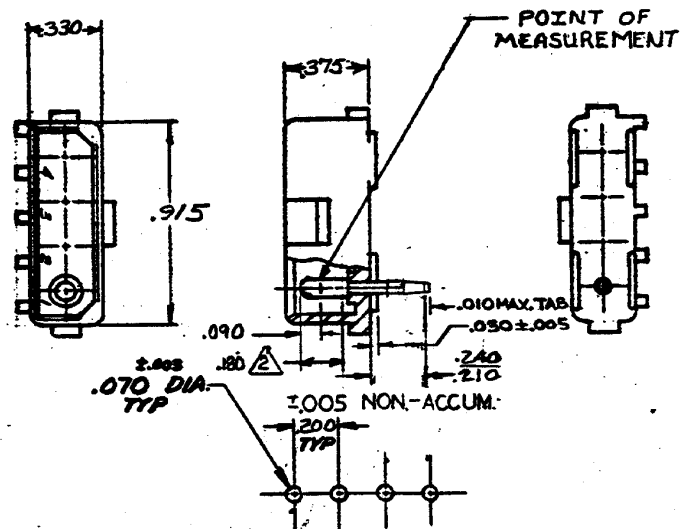

RECOMMENDED LAYOUT FOR
.125 THICK P.C. BOARD

1. PARTS COMPLY WITH TE SOLDERABILITY

SPEC. NO 109-11-3

△ CONTACT IS PLATED OVERALL WITH .000050 NICKEL, THEN .000030 GOLD OVER CONTACT LENGTH INDICATED AND TIN PLATED ON SOLDER TAIL END.

3. DIMENSION SHOWN REPRESENT PRODUCT IN DRY CONDITION. ADDITIONAL 2% GROWTH DUE TO END USE LOCATION MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.

OBSOLETE

350544-2 NYLON - NATURAL COPPER ALLOY - GOLD △

350544-1 NYLON - NATURAL COPPER ALLOY PRE-TIN
ASSEMBLY NO. HSG. MATL & COLOR PIN MATL & FINISH

OR 3-30-73

Q. Edman

CHK

4/14/73

DE

J. Humble 9/14/73

J. Humble 9/14/73

MATERIAL AND FINISH

SEE TABLE

WIRE - RANGE - INSULATION

TYPE

TOLERANCE EXCEPT AS NOTED

SCALE

NAME

TE

TE Connectivity

CLASS

TYPE

LSC

CM

B

350544

REV L3

4 CIRCUIT MATE-N-LOK
P.C. BOARD HEADER

L3	REVISED PER ECR-21-117185	PJ	VS	20067201
L2	REVISED PER ECR-15-006702	NK	PQ	20012015
L1	REVISION RECORD	23	CHK	DATE

ALL DIMENSIONS IN INCHES. DO NOT SCALE PRINT.