




MTA 100

TE Internal #: 3-640620-4

4 Position, Receptacle, Connector Assembly, Insulation  
Displacement (IDC), Wire-to-Board, Tin (Sn), Normal, UL 94V-2,  
MTA 100

[View on TE.com >](#)

Connectors > Rectangular Connectors > Standard Rectangular Connectors > MTA Receptacle: Nylon, Tin Plated, 2.54 mm

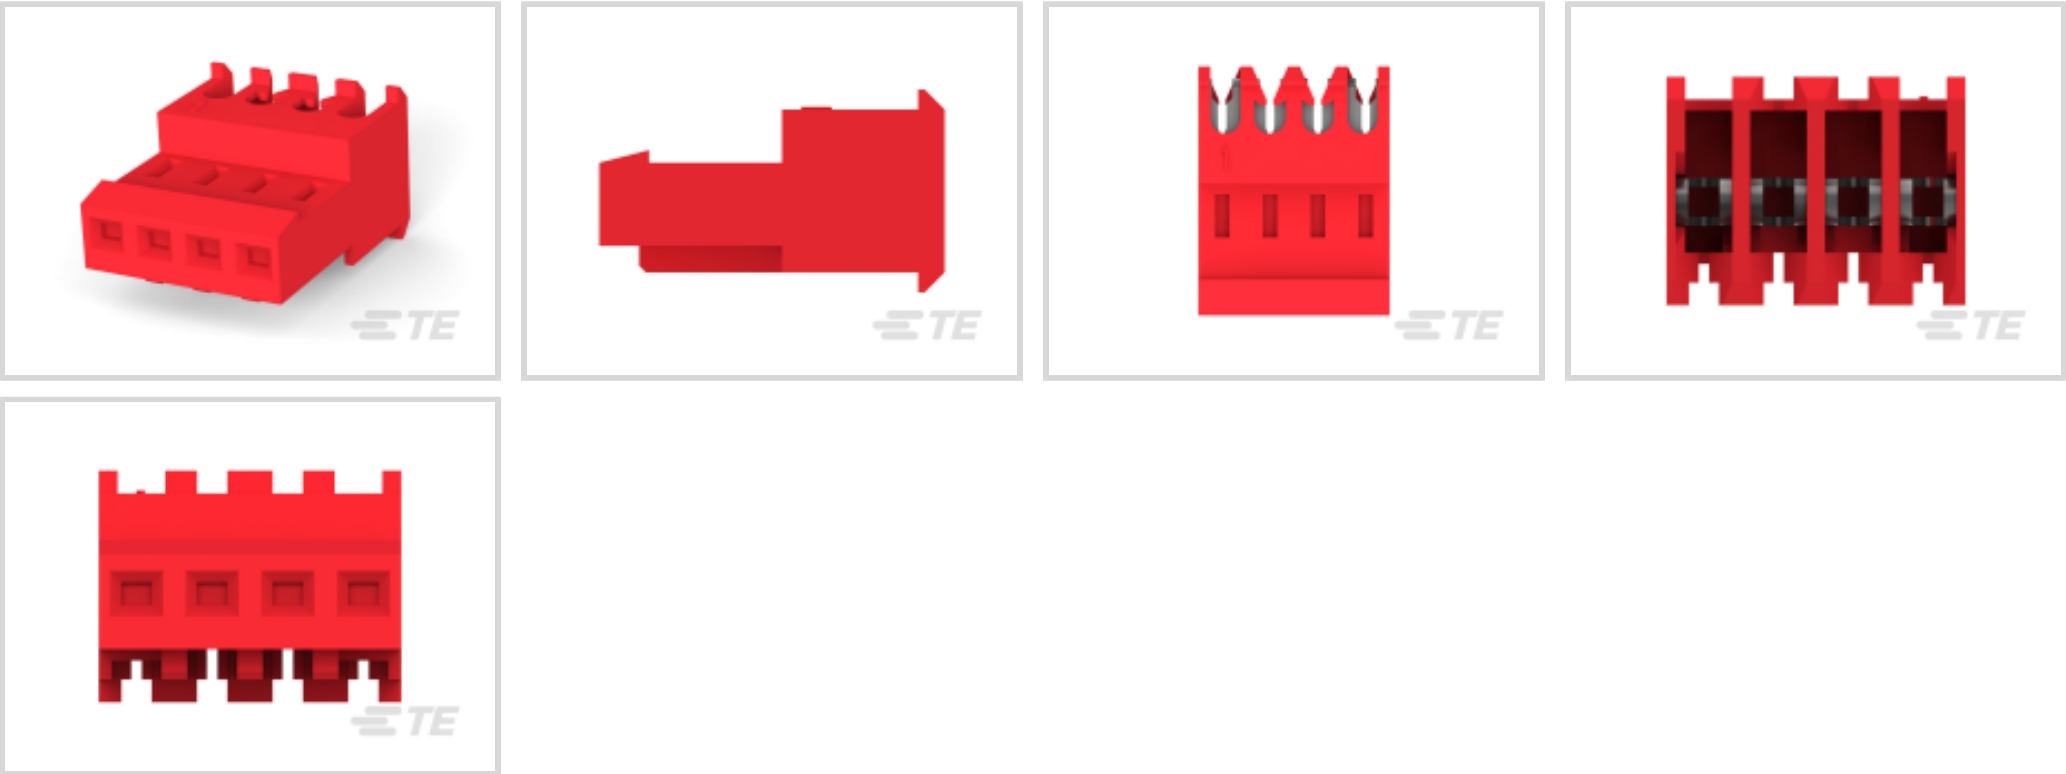

Connector Product Type: **Connector Assembly**  
Mating Alignment: **Without**  
Connector & Housing Type: **Receptacle**  
Mating Retention Type: **Locking Ramp**  
Connector System: **Wire-to-Board**

[All MTA Receptacle: Nylon, Tin Plated, 2.54 mm \(167\)](#)

Features

Product Type Features

|                                    |                    |
|------------------------------------|--------------------|
| Compatible With Discrete Wire Type | Stranded           |
| Connector Product Type             | Connector Assembly |
| Connector & Housing Type           | Receptacle         |
| Connector System                   | Wire-to-Board      |
| Insertion Force Type               | Normal             |
| Sealable                           | No                 |
| Connector & Contact Terminates To  | Wire & Cable       |

Configuration Features

|                     |     |
|---------------------|-----|
| Number of Cavities  | 4   |
| Contacts Preloaded  | Yes |
| Number of Positions | 4   |
| Number of Rows      | 1   |



Electrical Characteristics

|                   |         |
|-------------------|---------|
| Operating Voltage | 250 VAC |
|-------------------|---------|

Body Features

|                       |     |
|-----------------------|-----|
| Primary Product Color | Red |
|-----------------------|-----|

Contact Features

|                                                |            |
|------------------------------------------------|------------|
| Contact Underplating Material                  | Nickel     |
| Wire Contact Termination Area Plating Material | Tin        |
| Contact Type                                   | Receptacle |
| Contact Mating Area Plating Material           | Tin (Sn)   |
| Contact Retention Within Housing               | With       |
| Contact Current Rating (Max)                   | 5 A        |

Termination Features

|                                    |                               |
|------------------------------------|-------------------------------|
| Termination Method to Wire & Cable | Insulation Displacement (IDC) |
|------------------------------------|-------------------------------|

Mechanical Attachment

|                         |                            |
|-------------------------|----------------------------|
| Mating Alignment        | Without                    |
| Mating Retention Type   | Locking Ramp               |
| Mating Retention        | With                       |
| Connector Mounting Type | Cable Mount (Free-Hanging) |

Housing Features

|                    |                |
|--------------------|----------------|
| Housing Material   | Nylon          |
| Centerline (Pitch) | 2.54 mm[.1 in] |

Dimensions

|                  |                  |
|------------------|------------------|
| Connector Width  | 7.75 mm[.305 in] |
| Connector Height | 13.21 mm[.52 in] |
| Wire Size        | 22 AWG           |
| Connector Length | 10.16 mm[.4 in]  |

Usage Conditions

|                             |                            |
|-----------------------------|----------------------------|
| Operating Temperature Range | -55 – 105 °C[-67 – 221 °F] |
|-----------------------------|----------------------------|

Operation/Application

|                     |        |
|---------------------|--------|
| Shielded            | No     |
| Circuit Application | Signal |



Industry Standards

|                                             |            |
|---------------------------------------------|------------|
| Compatible With Agency/Standards Products   | CSA, UL    |
| UL Rating                                   | Recognized |
| Compatible With Approved Standards Products | UL E28476  |
| CSA Rating                                  | LR 7189    |
| UL Flammability Rating                      | UL 94V-2   |

Packaging Features

|                    |              |
|--------------------|--------------|
| Packaging Quantity | 500          |
| Packaging Method   | Box & Carton |

Product Compliance

For compliance documentation, visit the product page on TE.com>


|                                               |                                                                                                                                 |
|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                       |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                       |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                                                         |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2025 (250)<br>Candidate List Declared Against: JUNE 2025 (250)<br>Does not contain REACH SVHC |
| Halogen Content                               | BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.                                                                          |
| Solder Process Capability                     | Not applicable for solder process capability                                                                                    |

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts





TE Part # CAT-104MTA-NYLCC  
Nylon PCB Connector Covers: 2.54 mm, MTA 100




TE Part # 640455-4  
04P MTA100 HDR ASSY SQ R/A POL




TE Part # 58074-1  
MTA 50/100/156 MANUAL TOOL FRAME



TE Part # CAT-104MTA-PVUNH  
PCB Header: Polyester, Vertical, Unshrouded, No Mating Alignment

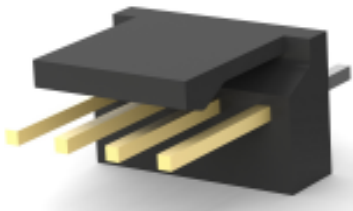


TE Part # CAT-104MTA-NVTHH  
Nylong Vertical PCB Header: 2.54mm, Through Hole, MTA 100




TE Part # 640454-4  
04P MTA100 HDR ASSY SQ STR POL




TE Part # CAT-104MTA-NVSMH  
PCB Header: Nylon, Vertical, Surface Mount, MTA 100

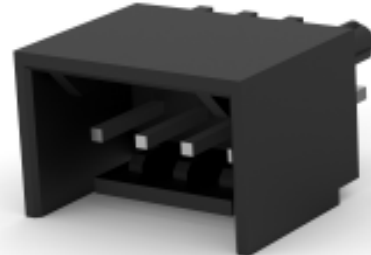


TE Part # CAT-104MTA-PVSHH  
Polyester Vertical PCB Header: 2.54 mm, Shrouded, MTA 100



TE Part # CAT-104MTA-NTPMP  
MTA Plug: Nylon, Tin Plated, 2.54 mm, with Mating Alignment



TE Part # 1-1744382-4  
04P MTA100 HDR ASSY,SM,SN,T&R, W/ CAP,RR



TE Part # CAT-104MTA-PRUSH  
PCB Header: Polyester, Right Angle, Unshrouded




TE Part # CAT-104MTA-PLSCC  
Polyester PCB Connector Covers: 2.54 mm, MTA 100



TE Part # CAT-104MTA-PVBRH  
Polyester Vertical PCB Header: 2.54 mm, Breakaway, MTA 100



TE Part # CAT-104MTA-PRSMH  
PCB Header, Right Angle, Polyester, 2.54 mm

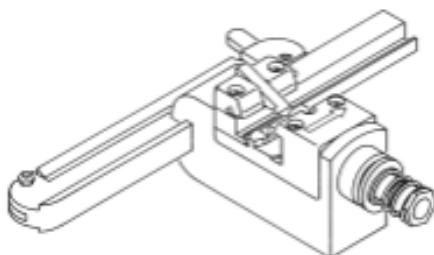

TE Part # 58442-1  
MTA 100 CRIMP HEAD PRODUCTION FEED THRU



TE Part # 59803-1  
MAINTENANCE TOOL

Also in the Series | **MTA 100**



Connector Caps & Covers(69)



Connector Contacts(8)




Connector Hardware(1)



Insertion & Extraction Tools(2)



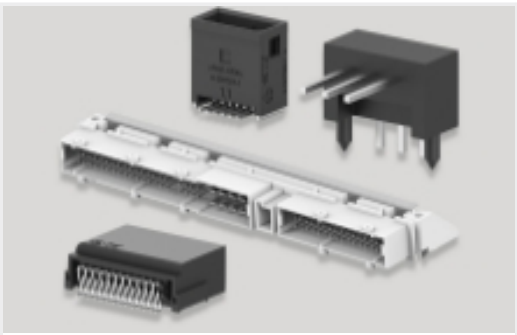


PCB Headers & Receptacles(441)



Rectangular Power Connectors(1)



Wire-to-Board Connector Assemblies & Housings(457)

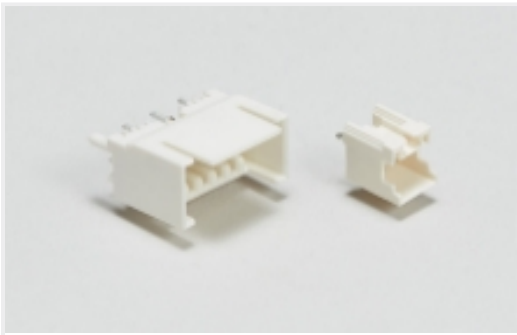

Wire-to-Board Headers & Receptacles (441)

Customers Also Bought



TE Part #86-050A-R  
50 PSIA RIBBON CABLE MV  
PRESSURE SENSOR



TE Part #86-050G-R  
50 PSIG RIBBON CABLE MV  
PRESSURE SENSOR




TE Part #86-030A-C  
30 PSIA CABLE CONN MV PRESSURE  
SENSOR




TE Part #3-640601-5  
05P MTA156 CONN ASSY 22AWG LF




TE Part #CAT-104MTA-NTPNR  
MTA Receptacle: Nylon, Tin Plated,  
2.54 mm

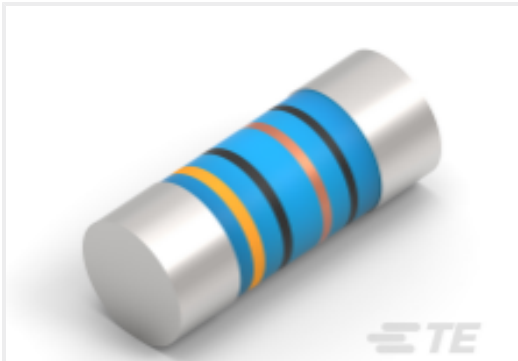

TE Part #5-2176316-4  
MELF SMA\_A 2K2 1% 50PPM 0207 1W

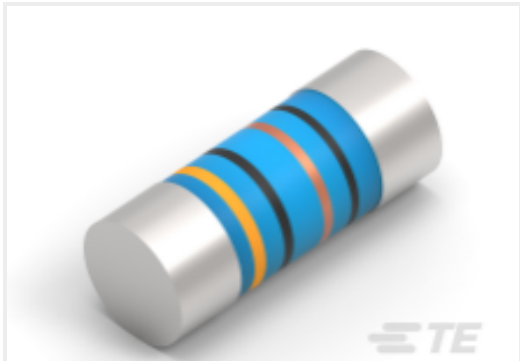

TE Part #5-2176316-8  
MELF SMA\_A 4K7 1% 50PPM 0207 1W

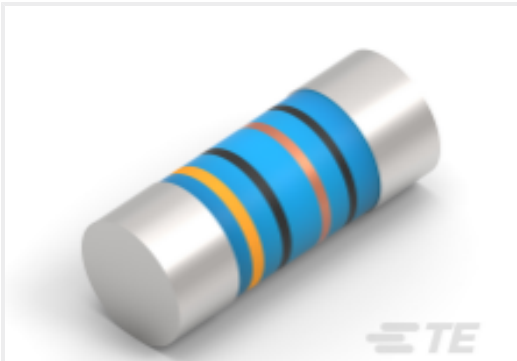

TE Part #6-2176316-6  
MELF SMA\_A 22K 1% 50PPM 0207 1W



TE Part #5553813-3  
ASSY,EMI RCPT,50 POSN,SCR LK

Documents

Product Drawings

04P MTA100 CONN ASSY F/T RED

English

CAD Files

Customer View Model

ENG\_CVM\_CVM\_3-640620-4\_N.2d\_dxf.zip

English

3D PDF



3D

Customer View Model

[ENG\\_CVM\\_CVM\\_3-640620-4\\_N.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_3-640620-4\\_N.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English

Agency Approvals

[UL](#)

English

[UL](#)

English