




MTA 156

TE Internal #: 3-641229-8  
8 Position, Receptacle, Connector Assembly, Insulation  
Displacement (IDC), Wire-to-Board, Gold (Au) / Gold Flash over  
Palladium Nickel, MTA 156

[View on TE.com >](#)

Connectors > Rectangular Connectors > Standard Rectangular Connectors

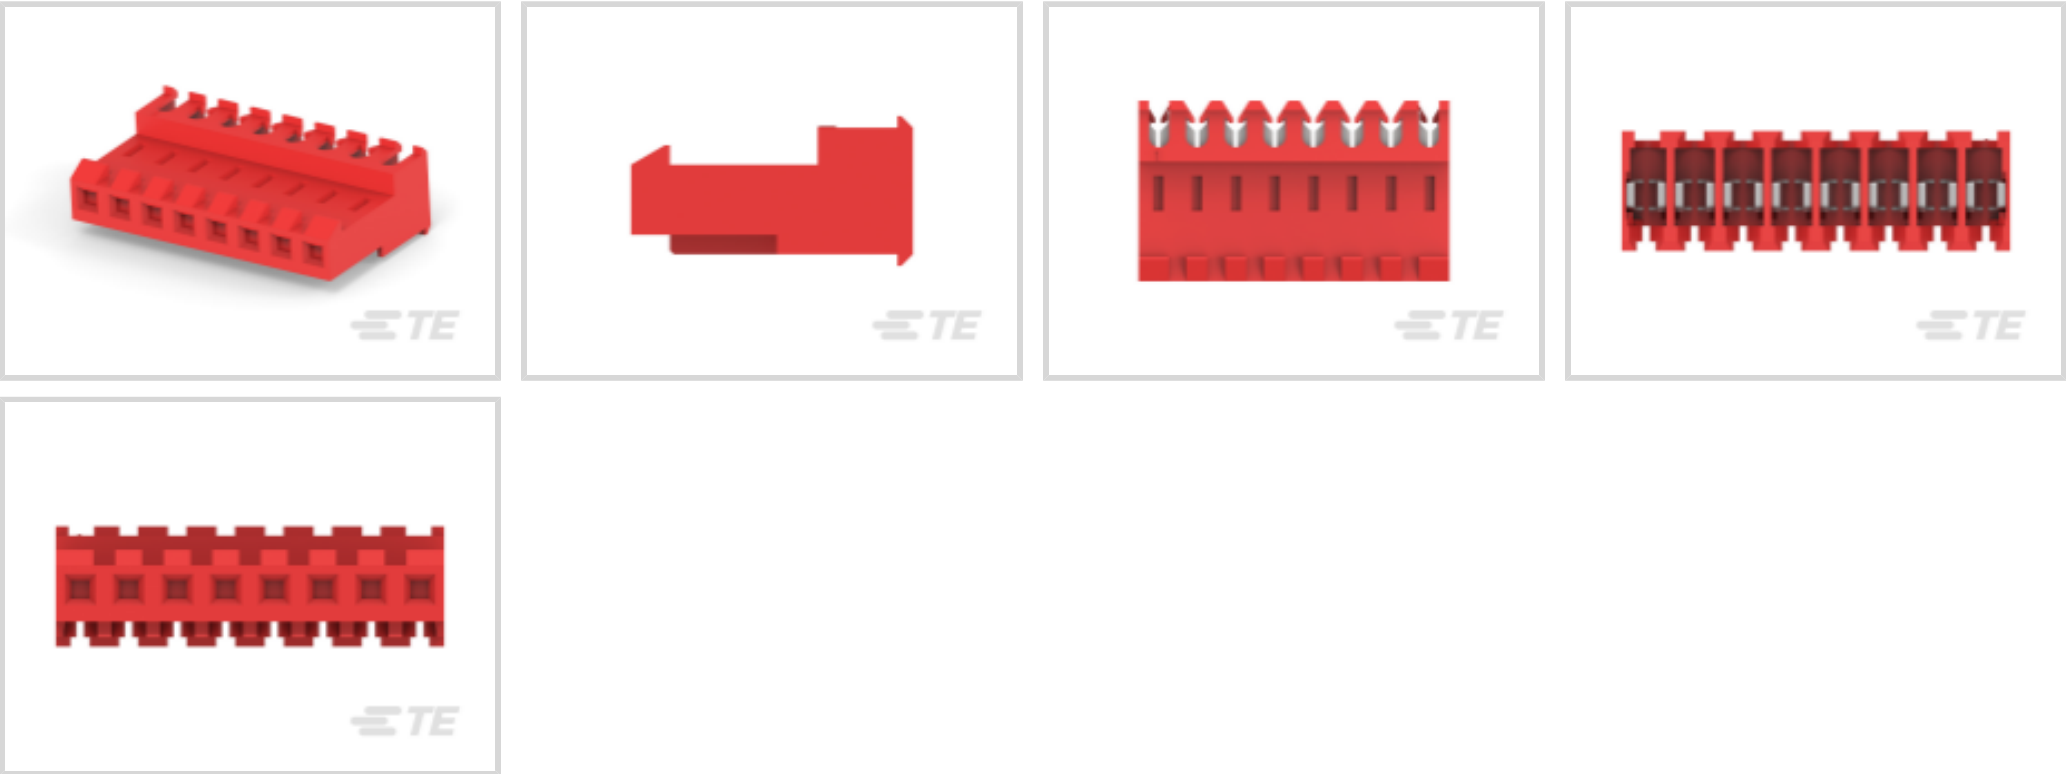

Connector Product Type: **Connector Assembly**  
Mating Alignment: **Without**  
Connector & Housing Type: **Receptacle**  
Mating Retention Type: **Locking Ramp**  
Connector System: **Wire-to-Board**

Features

Product Type Features

|                                    |                    |
|------------------------------------|--------------------|
| Compatible With Discrete Wire Type | Stranded           |
| Connector Product Type             | Connector Assembly |
| Connector & Housing Type           | Receptacle         |
| Connector System                   | Wire-to-Board      |
| Insertion Force Type               | Normal             |
| Sealable                           | No                 |
| Connector & Contact Terminates To  | Wire & Cable       |

Configuration Features

|                     |     |
|---------------------|-----|
| Number of Cavities  | 8   |
| Contacts Preloaded  | Yes |
| Number of Positions | 8   |
| Number of Rows      | 1   |

Electrical Characteristics

|                   |         |
|-------------------|---------|
| Operating Voltage | 600 VAC |
|-------------------|---------|



Body Features

|                       |     |
|-----------------------|-----|
| Primary Product Color | Red |
|-----------------------|-----|

Contact Features

|                                                |                                             |
|------------------------------------------------|---------------------------------------------|
| Contact Underplating Material                  | Nickel                                      |
| Wire Contact Termination Area Plating Material | Tin                                         |
| Contact Type                                   | Receptacle                                  |
| Contact Mating Area Plating Material           | Gold (Au), Gold Flash over Palladium Nickel |
| Contact Retention Within Housing               | With                                        |
| Contact Current Rating (Max)                   | 7 A                                         |

Termination Features

|                                    |                               |
|------------------------------------|-------------------------------|
| Termination Method to Wire & Cable | Insulation Displacement (IDC) |
|------------------------------------|-------------------------------|

Mechanical Attachment

|                                       |                            |
|---------------------------------------|----------------------------|
| Contact Retention Type Within Housing | Locking Lance              |
| Mating Alignment                      | Without                    |
| Mating Retention Type                 | Locking Ramp               |
| Mating Retention                      | With                       |
| Connector Mounting Type               | Cable Mount (Free-Hanging) |

Housing Features

|                    |                  |
|--------------------|------------------|
| Housing Material   | Nylon 6/6        |
| Centerline (Pitch) | 3.96 mm[.156 in] |

Dimensions

|                  |                   |
|------------------|-------------------|
| Connector Width  | 9.78 mm[.385 in]  |
| Connector Height | 18.42 mm[.725 in] |
| Wire Size        | 22 AWG            |
| Connector Length | 31.7 mm[1.248 in] |

Usage Conditions

|                             |                            |
|-----------------------------|----------------------------|
| Operating Temperature Range | -55 – 105 °C[-67 – 221 °F] |
|-----------------------------|----------------------------|

Operation/Application

|                     |        |
|---------------------|--------|
| Shielded            | No     |
| Circuit Application | Signal |

Industry Standards

|  |  |
|--|--|
|  |  |
|--|--|



|                                             |            |
|---------------------------------------------|------------|
| Compatible With Agency/Standards Products   | CSA, UL    |
| UL Rating                                   | Recognized |
| Compatible With Approved Standards Products | UL E28476  |
| CSA Rating                                  | LR 7189    |
| UL Flammability Rating                      | UL 94V-2   |

Packaging Features

|                    |         |
|--------------------|---------|
| Packaging Quantity | 250     |
| Packaging Method   | Bag/Box |

Product Compliance


For compliance documentation, visit the product page on TE.com>

|                                               |                                                                                                                                 |
|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                       |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                       |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                                                         |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2025 (250)<br>Candidate List Declared Against: JUNE 2025 (250)<br>Does not contain REACH SVHC |
| Halogen Content                               | BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.                                                                          |
| Solder Process Capability                     | Not applicable for solder process capability                                                                                    |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




TE Part # 3-641210-8  
08P MTA156 HDR FLRA FB 30AU LF



TE Part # 641922-6  
08P MTA156 HDR ASSY W/O#4,6



TE Part # 641938-6  
08P MTA156 HDR W/O#3 .045 RD




TE Part # 3-641208-8  
08P MTA156 HDR ASSY FL ST LF



TE Part # 641922-3  
08P MTA156 HDR ASSY STR W/O#2



TE Part # 3-641202-8  
08P MTA156 HDR ASSY PL 30AU LF




TE Part # 641922-2  
08P MTA156 HDR ASSY STR W/O#3



TE Part # 640643-8  
08P MTA156 COVER F/T



TE Part # 3-644760-8  
08P MTA156 HDR ASSY FL ST LF



TE Part # 3-641209-8  
08P MTA156 HDR ASSY FL ST LF



TE Part # 3-644759-8  
08P MTA156 HDR ASSY STR LF




TE Part # 3-644761-8  
08P MTA156 HDR ASSY R/A F/L LF



TE Part # 58074-1  
MTA 50/100/156 MANUAL TOOL FRAME



TE Part # 643071-8  
08P MTA156 FD-THRU COVER



TE Part # 643067-8  
08P MTA156 MOLDED COVER



TE Part # 640551-8  
08P MTA156 COVER




TE Part # 641922-1  
08P MTA156 HDR ASSY STR W/O#4

Also in the Series | [MTA 156](#)




Connector Caps & Covers(89)

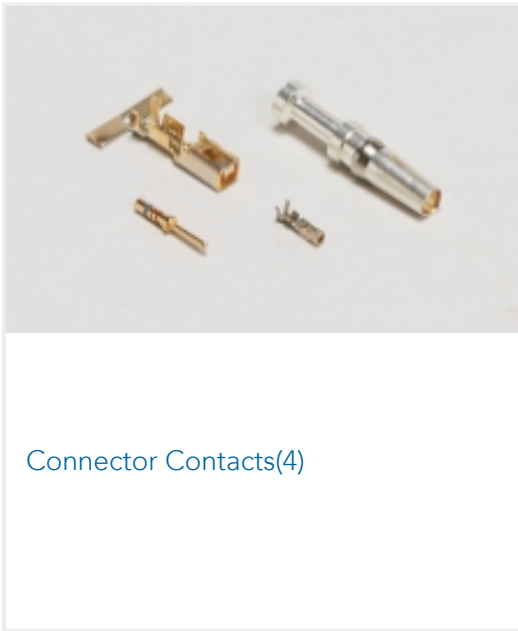

Connector Contacts(4)




Connector Hardware(2)

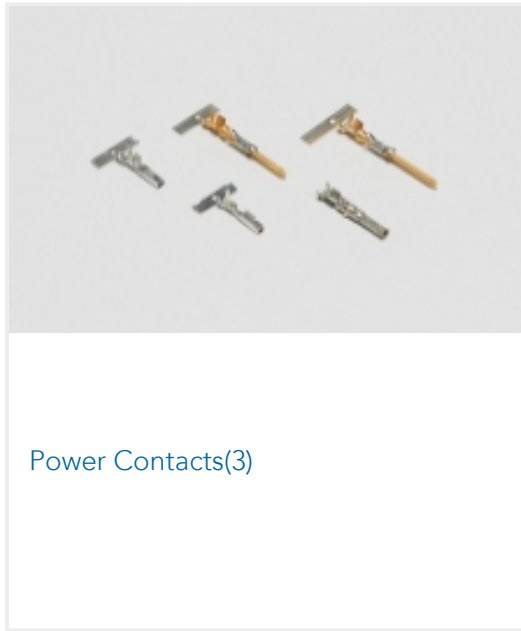


Power Contacts(3)



Rectangular Power Connectors(1178)

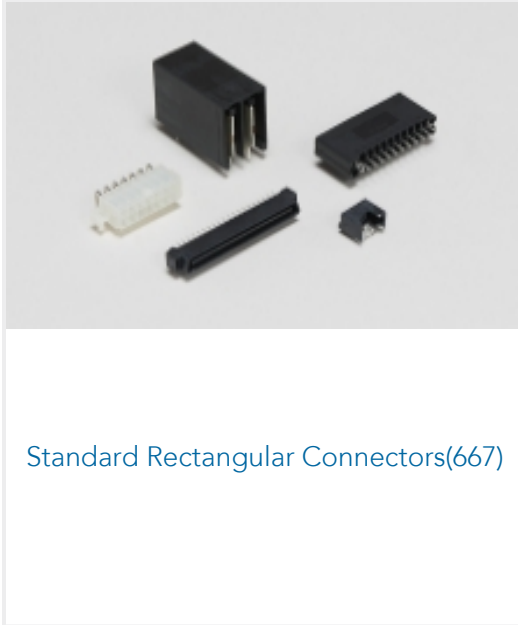

Standard Rectangular Connectors(667)

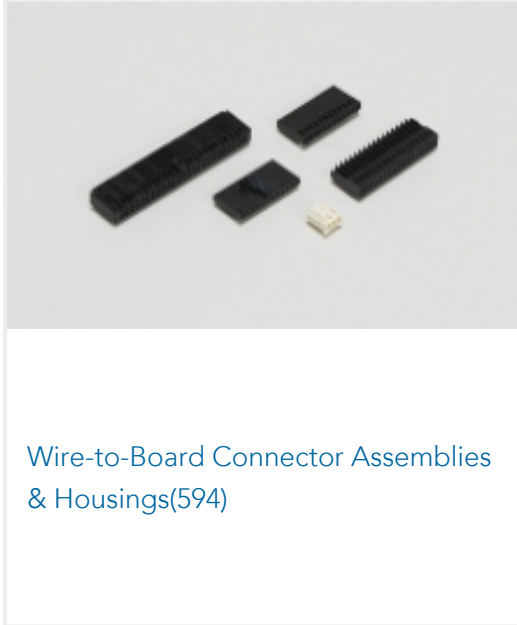


Wire-to-Board Connector Assemblies & Housings(594)

Customers Also Bought



TE Part #EE5640-000  
ELB-15/28-200-ETP25

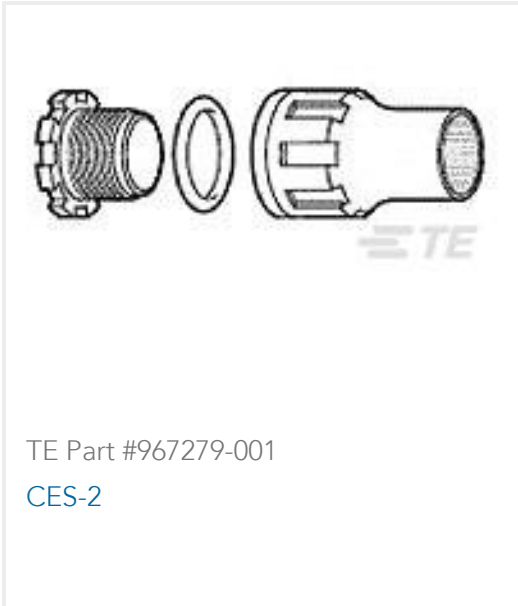

TE Part #967279-001  
CES-2



TE Part #EL9204-000  
ELB-25-210BB10



TE Part #66099-4  
III+ PIN,1-16,30AU/FL,LP



TE Part #3-641208-7  
07P MTA156 HDR ASSY FL ST LF



TE Part #3-641229-6  
06P MTA156 CONN ASSY 22AWG LF

Documents

Product Drawings

08P MTA156 CONN ASSY 22AWG LF

English

CAD Files

Customer View Model

ENG\_CVM\_CVM\_3-641229-8\_S.2d\_dxf.zip

English

3D PDF



3D

Customer View Model

[ENG\\_CVM\\_CVM\\_3-641229-8\\_S.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_3-641229-8\\_S.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English

Application Specification

Japanese

Application Specification

English

MTA 156 Ribbon Cable Connector Assemblies (English And Spanish)

English

MTA 156 Ribbon Cable Connector Assemblies (English And Spanish)

Japanese