



MTA 156

TE Internal #: 3-643820-4


4 Position, Receptacle, Connector Assembly, Insulation

Displacement (IDC), Wire-to-Board, Tin (Sn), UL 94V-2, 3.96 mm [.

156 in] Centerline, MTA 156

[View on TE.com >](#)

Connectors > Rectangular Connectors > Standard Rectangular Connectors

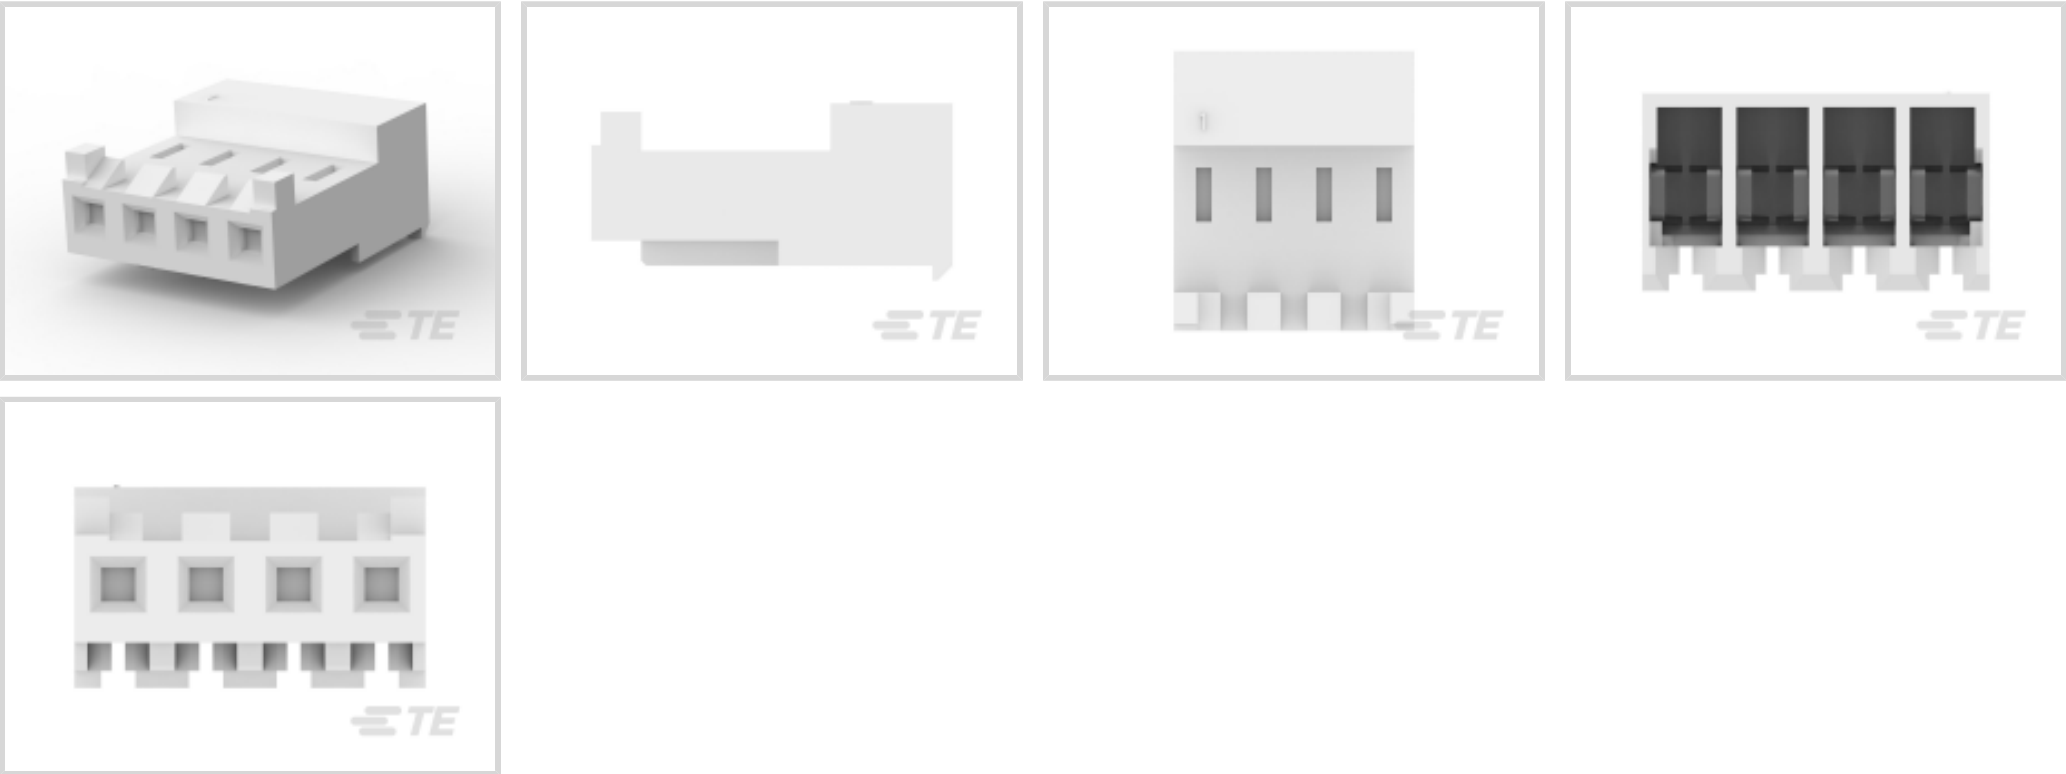

Connector Product Type: **Connector Assembly**

Mating Alignment: **With**

Mating Alignment Type: **Polarizing Tab**

Connector & Housing Type: **Receptacle**

Mating Retention Type: **Locking Ramp**

Features

Product Type Features

Compatible With Discrete Wire Type	Stranded
Connector Product Type	Connector Assembly
Connector & Housing Type	Receptacle
Connector System	Wire-to-Board
Sealable	No
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	4
Number of Rows	1
Number of Power Positions	4
Number of Signal Positions	0

Electrical Characteristics

Operating Voltage	600 VAC
-------------------	---------

Body Features



Primary Product Color	White
Cable Exit Angle	90 °

Contact Features

Contact Underplating Material	Nickel
Contact Underplating Material Thickness	.762 μm[30 μin]
Contact Layout	Inline
Contact Base Material	Copper Alloy
Wire Contact Termination Area Plating Thickness	2.03 μm[80 μin]
Contact Mating Area Plating Material Finish	Matte
Contact Mating Area Plating Material	Tin (Sn)
Contact Retention Within Housing	With
Contact Current Rating (Max)	7 A
Contact Type	Receptacle
Wire Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material Thickness	2.03 μm[80 μin]

Termination Features

Termination Method to Wire & Cable	Insulation Displacement (IDC)
------------------------------------	-------------------------------

Mechanical Attachment

Strain Relief	With
Panel Mount Feature	Without
Contact Retention Type Within Housing	Locking Lance
Mating Alignment	With
Mating Alignment Type	Polarizing Tab
Mating Retention Type	Locking Ramp
Mating Retention	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Wire & Cable IDC Installation Type	Closed End
Centerline (Pitch)	3.96 mm[.156 in]
Housing Material	Nylon

Dimensions

Compatible Insulation Diameter Range	2.41 mm[.095 in]
--------------------------------------	------------------



Connector Height	9.02 mm
Connector Length	15.85 mm
Wire Size	.2 mm ²

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Industry Standards

Compatible With Agency/Standards Products	CSA, UL
UL Rating	Recognized
Compatible With Approved Standards Products	UL E28476
CSA Rating	Certified, LR 7189
UL Flammability Rating	UL 94V-2
Glow Wire Rating	Standard Part - Not Glow Wire

Packaging Features

Packaging Quantity	250
Packaging Method	Box

Product Compliance

For compliance documentation, visit the product page on TE.com>






EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

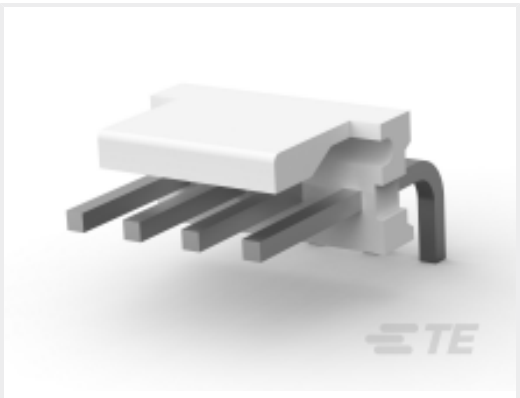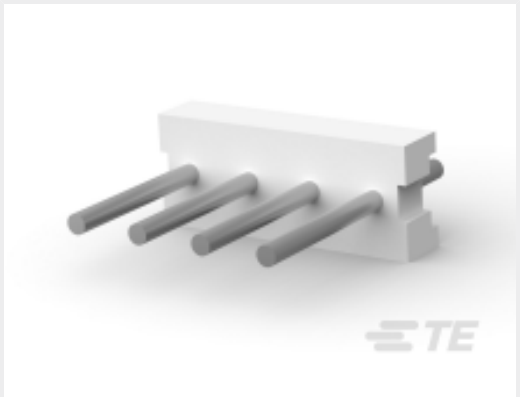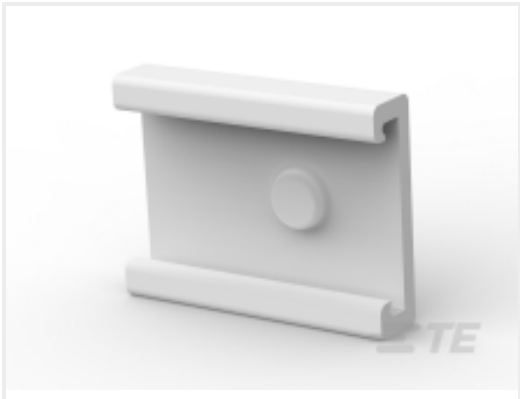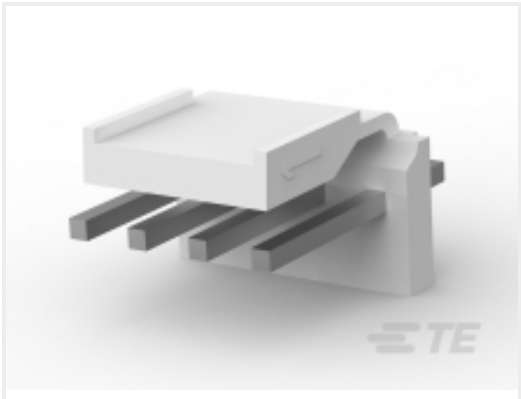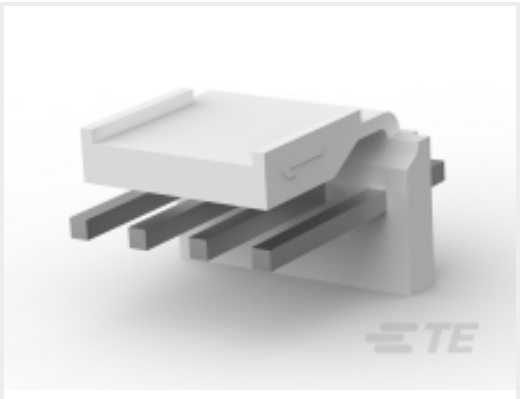 TE Part # 644749-4 04P MTA156 HDR ASSY STR SQ SN	 TE Part # 643493-3 04P MTA156 HDR ASSY W/O#2,3	 TE Part # 2-647127-4 04P MTA156 SHRD HDR ASSY LF	 TE Part # 2-647123-4 04P MTA156 SHRD HDR ASSY SQ SN
 TE Part # 640383-4 04P MTA156 HDR ASSY STR SQ SN	 TE Part # 3-644754-4 04P MTA156 HDR ASSY SQ R/A F/L	 TE Part # 640389-4 04P MTA156 HDR ASSY SQ R/A F/L	 TE Part # 643493-4 04P MTA156 HDR ASSY STR W/O#3
 TE Part # 58247-2 MTA 156 CRIMP HEAD PRODUCTION DISCRETE	 TE Part # 3-644613-4 04P MTA156 HDR RA PO WO PEG LF	 TE Part # 640384-4 04P MTA156 HDR ASSY STR RND SN	 TE Part # 2-647125-4 04P MTA156 SHRD HDR ASSY LF
 TE Part # 640643-4 04P MTA156 COVER F/T	 TE Part # 3-644611-4 04P MTA156 HDR POL WO PEGS LF	 TE Part # 3-644615-4 04P MTA156 POL HDR ASSY LF	 TE Part # 3-644617-4 04P MTA156 HDR ASY PO RA FB LF



TE Part # 643493-1
04P MTA156 HDR ASSY STR W/O#2



TE Part # 644752-4
04P MTA156 HDR ASSY SQ STR F/L



TE Part # 643071-4
04P MTA156 FD-THRU COVER



TE Part # 640551-4
04P MTA156 COVER


Also in the Series | MTA 156



Connector Caps & Covers(89)




Connector Contacts(4)

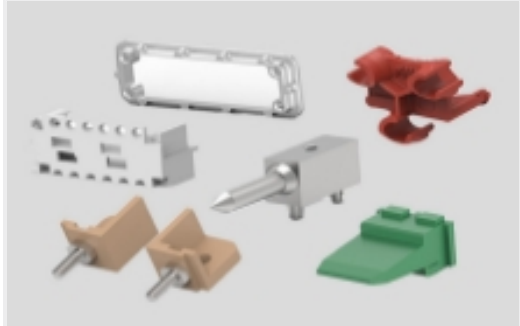

Connector Hardware(2)



Insertion & Extraction Tools(1)

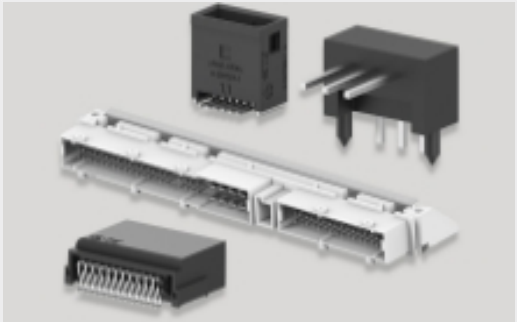


PCB Headers & Receptacles(677)



Power Contacts(3)



Rectangular Power Connectors(1178)

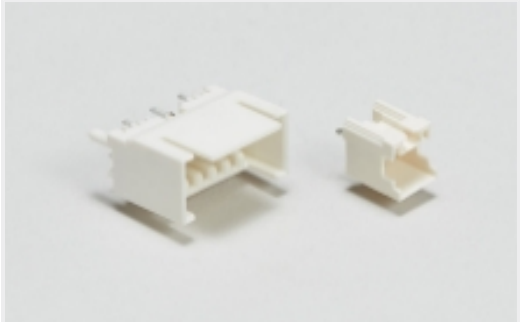

Wire-to-Board Headers & Receptacles (677)

Customers Also Bought




TE Part #34147
PG R 22-16 COMM 22-18 MIL 6



TE Part #2-34147-1
PG R 22-16 COMM 22-18 MIL 6




TE Part #2-520264-2
ULTRAFAST 250 ASSY REC 22-18 TPBR LP

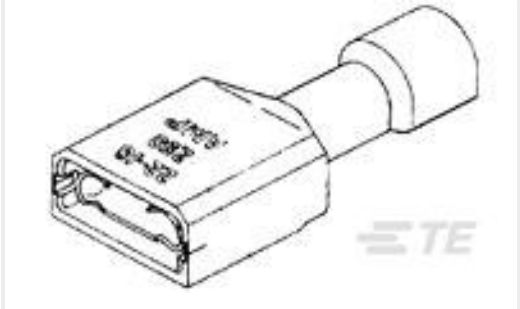


TE Part #2-520405-2
ULTRA-FAST 250 ASY REC 22-18 TPBR



TE Part #CAT-104MTA-NTPMR
Nylon Tin Plated Receptacle: 2.54 mm, with Mating Alignment, MTA 100

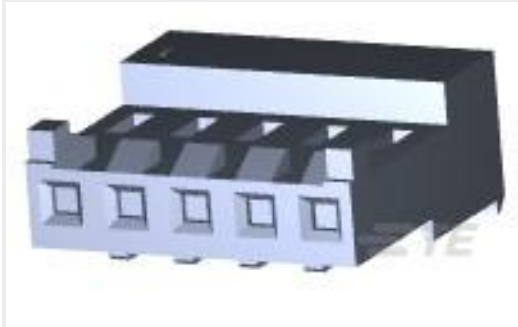

TE Part #3-643817-5
05P MTA156 CONN ASSY 18AWG ORA

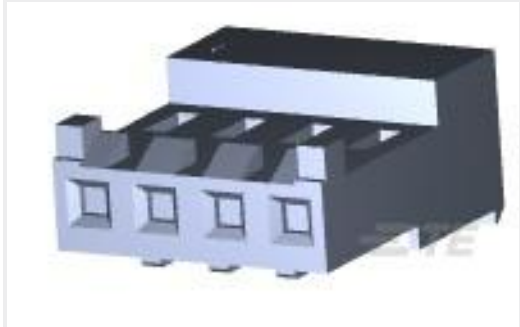

TE Part #3-643819-4
04P MTA156 CONN ASSY 22AWG RED



TE Part #3-647001-4
04P MTA100 PSTD CONN ASSY SN



Documents

Product Drawings

04P MTA156 CONN ASSY 24AWG WHT

English

CAD Files

3D PDF

English

Customer View Model

ENG_CVM_3-643820-4_H1.3d_igs.zip

English

Customer View Model

ENG_CVM_3-643820-4_H1.3d_stp.zip

English

Customer View Model

ENG_CVM_3-643820-4_H1.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_3-643820-4_H.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_3-643820-4_H.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_3-643820-4_H.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

ENG_DS_82056_MTA_0818.pdf

English

Product Specifications

Application Specification

English



Application Specification

Japanese

Application Specification

English

MTA 156 Ribbon Cable Connector Assemblies (English And Spanish)

English

MTA 156 Ribbon Cable Connector Assemblies (English And Spanish)

Japanese

Agency Approvals

Agency Approval Document

English