




MTA 156

TE Internal #: 3-644460-3
3 Position, Receptacle, Connector Assembly, Insulation
Displacement (IDC), Wire-to-Board, Gold (Au) / Gold Flash over
Palladium Nickel, MTA 156

[View on TE.com >](#)

Connectors > Rectangular Connectors > Standard Rectangular Connectors

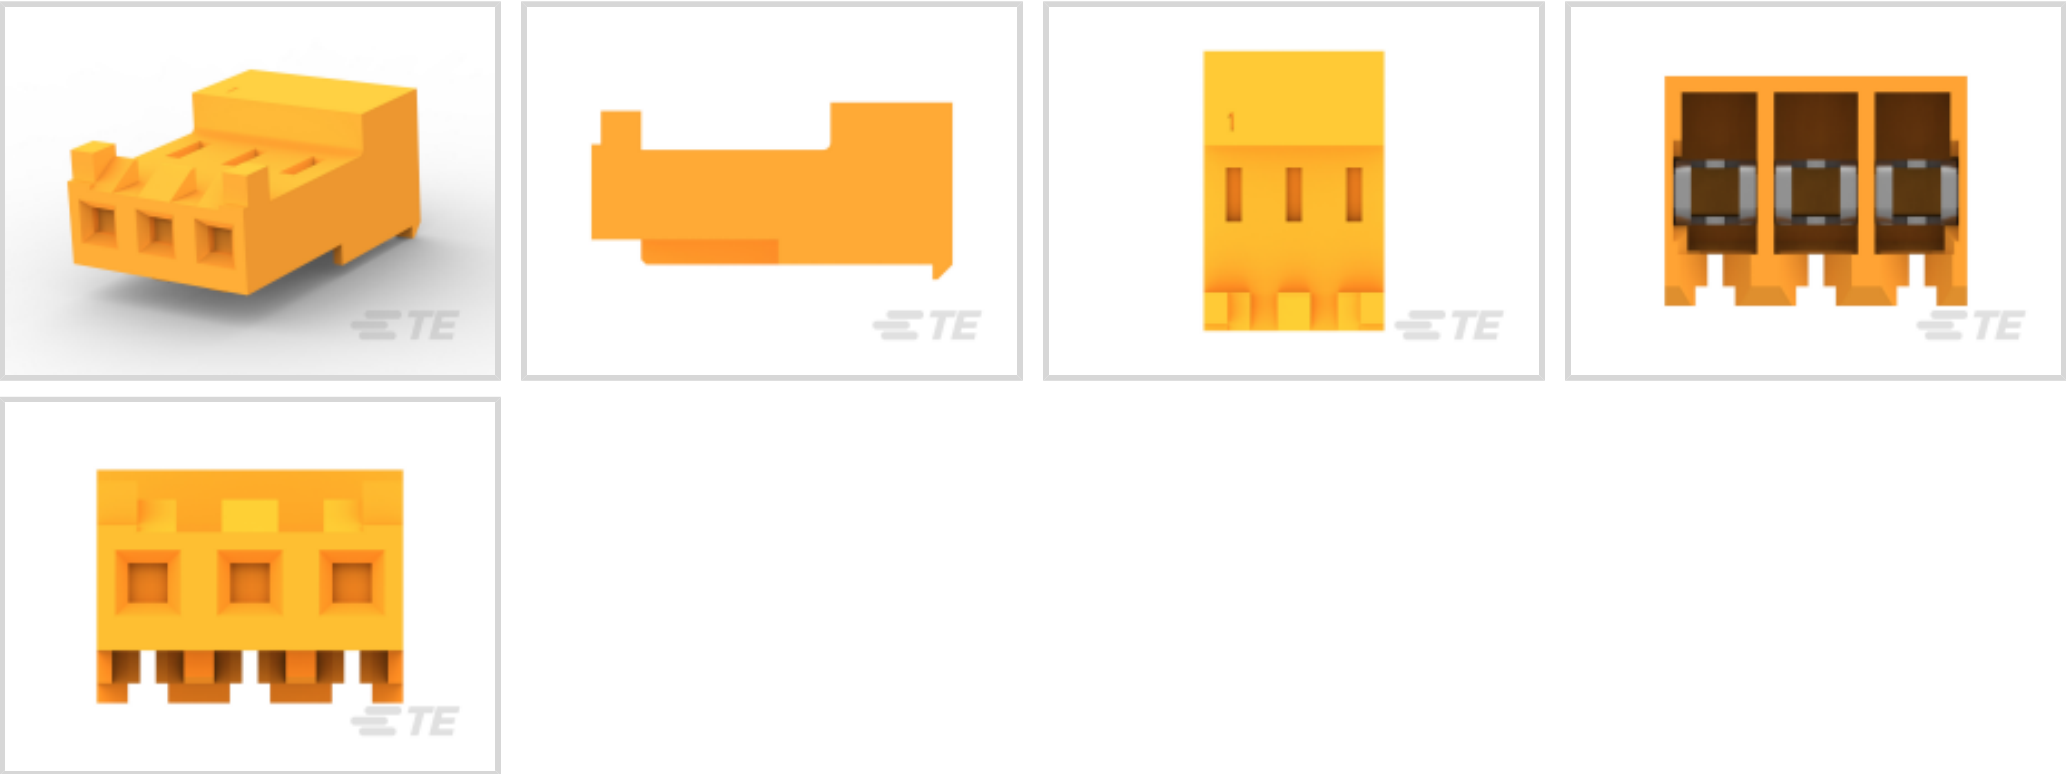

Connector Product Type: **Connector Assembly**
Mating Alignment: **With**
Mating Alignment Type: **Polarizing Tab**
Connector & Housing Type: **Receptacle**
Mating Retention Type: **Locking Ramp**

Features

Product Type Features

Compatible With Discrete Wire Type	Stranded
Connector Product Type	Connector Assembly
Connector & Housing Type	Receptacle
Connector System	Wire-to-Board
Sealable	No
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	3
Number of Rows	1
Number of Power Positions	3

Electrical Characteristics

Operating Voltage	600 VAC
-------------------	---------

Body Features

Primary Product Color	Orange
-----------------------	--------



Cable Exit Angle	90 °
------------------	------

Contact Features

Contact Underplating Material	Nickel
Contact Underplating Material Thickness	1.27 – 1.77 µm[1.27 – 1.77 µin]
Contact Layout	Inline
Contact Base Material	Copper Alloy
Wire Contact Termination Area Plating Thickness	.38 µm[15 µin]
Contact Mating Area Plating Material	Gold (Au), Gold Flash over Palladium Nickel
Contact Retention Within Housing	With
Contact Current Rating (Max)	7 A
Contact Type	Receptacle
Wire Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material Thickness	.076 µm[3 µin]

Termination Features

Termination Method to Wire & Cable	Insulation Displacement (IDC)
------------------------------------	-------------------------------

Mechanical Attachment

Strain Relief	With
Panel Mount Feature	Without
Contact Retention Type Within Housing	Locking Lance
Mating Alignment	With
Mating Alignment Type	Polarizing Tab
Mating Retention Type	Locking Ramp
Mating Retention	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Wire & Cable IDC Installation Type	Closed End
Centerline (Pitch)	3.96 mm[.156 in]
Housing Material	Nylon

Dimensions

Compatible Insulation Diameter Range	2.41 mm[.095 in]
Connector Height	9.02 mm[.355 in]
Connector Length	11.89 mm[.468 in]



Wire Size	.8 – .9 mm ²
-----------	-------------------------

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Industry Standards

Compatible With Agency/Standards Products	CSA, UL
UL Rating	Recognized
Compatible With Approved Standards Products	UL E28476
CSA Rating	Certified, LR 7189
UL Flammability Rating	UL 94V-2
Glow Wire Rating	Standard Part - Not Glow Wire

Packaging Features

Packaging Quantity	500
Packaging Method	Bag

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability





Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products



will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 TE Part # 58247-3 MTA 156 CRIMP HEAD PRODUCTION RBBN CABLE	 TE Part # 3-641210-3 03P MTA156 HDR FLRA FB 30AU LF	 TE Part # 3-644761-3 03P MTA156 HDR ASSY R/A F/L LF	 TE Part # 3-644633-3 03P MTA156 HDR ASSY R/A LF
 TE Part # 643067-3 03P MTA156 MOLDED COVER	 TE Part # 640643-3 03P MTA156 COVER F/T	 TE Part # 58074-1 MTA 50/100/156 MANUAL TOOL FRAME	 TE Part # 641937-3 03P MTA156 HDR ASSY SQ W/O#1
 TE Part # 640551-3 03P MTA156 COVER	 TE Part # 3-644631-3 03P MTA156 HDR ASSY STR LF	 TE Part # 3-644759-3 03P MTA156 HDR ASSY STR LF	 TE Part # 3-641202-3 03P MTA156 HDR ASSY PL 30AU LF
 TE Part # 643071-3 03P MTA156 FD-THRU COVER	 TE Part # 58247-2 MTA 156 CRIMP HEAD PRODUCTION DISCRETE	 TE Part # 3-641208-3 03P MTA156 HDR ASSY FL ST LF	 TE Part # 3-644760-3 03P MTA156 HDR ASSY FL ST LF

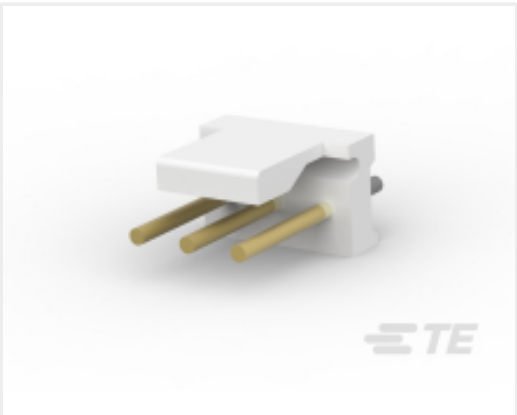

TE Part # 3-641209-3
03P MTA156 HDR ASSY FL ST LF



TE Part # 58247-1
MTA 156 CRIMP HEAD REPAIR DISCRETE



TE Part # 641937-2
03P MTA156 HDR ASSY SQ W/O#3



TE Part # 2472633-1
03P MTA156 HDR ASSY W/O#2 LF W/ CHMFR

Also in the Series | MTA 156



Connector Caps & Covers(89)




Connector Contacts(4)



Connector Hardware(2)



Insertion & Extraction Tools(1)

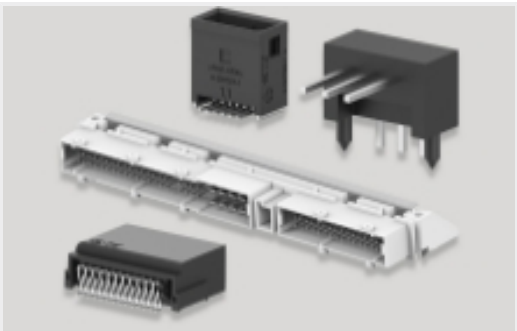


PCB Headers & Receptacles(677)



Power Contacts(3)




Rectangular Power Connectors(1178)

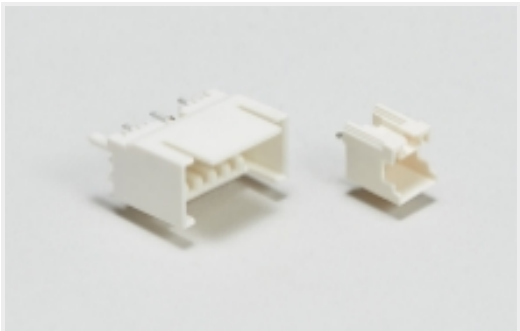

Wire-to-Board Headers & Receptacles (677)


Customers Also Bought

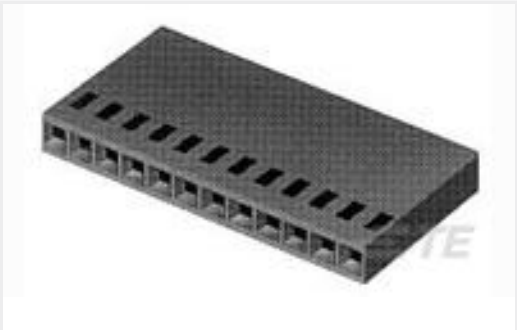


TE Part #87499-7
04 MODIV HSG SR MRKD .100CL



TE Part #3-641191-6
06P MTA100 CONN ASSY WHT LF

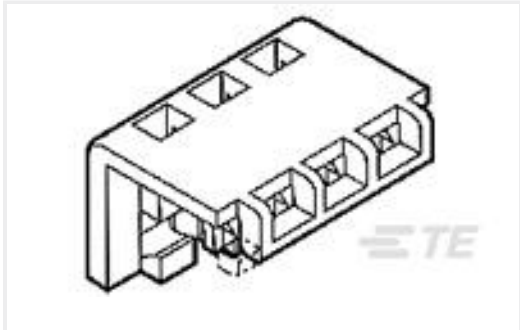


TE Part #643067-5
05P MTA156 MOLDED COVER

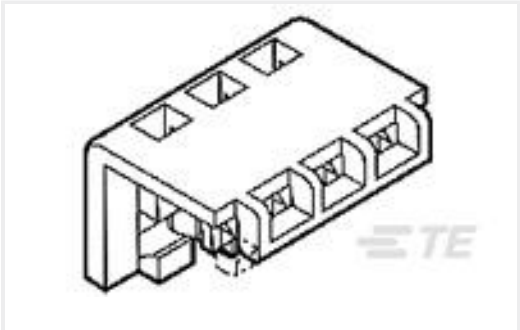


TE Part #643067-6
06P MTA156 MOLDED COVER




TE Part #CAT-104MTA-NGPMR
Nylon Gold Plated Receptacle: 2.54 mm, with Mating Alignment, MTA 100

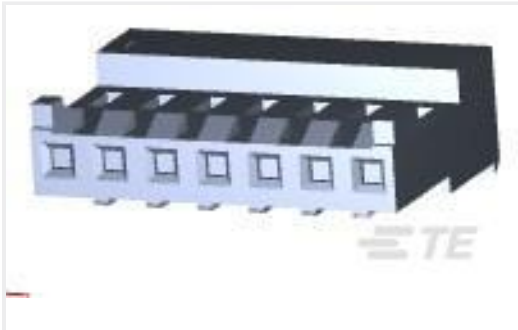

TE Part #3-644460-7
07P MTA156 CONN ASSY 18AWG ORA

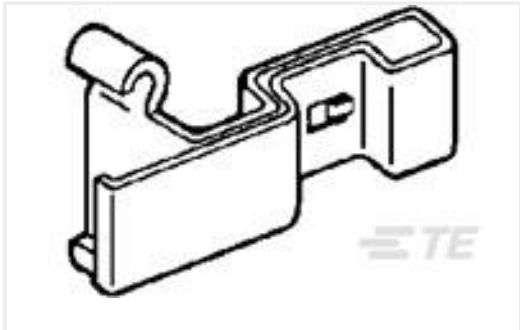

TE Part #745779-2
HD SQZ TO RELEASE KIT

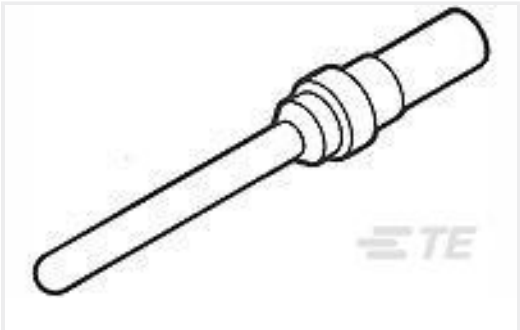

TE Part #1218266-1
CONT,CRIMP PIN,18AWG,109,SZ 20



Documents

Product Drawings

[03P MTA156 CONN ASSY 18AWG ORA](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_3-644460-3_N.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_3-644460-3_N.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_3-644460-3_N.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Application Specification](#)

English

[Application Specification](#)

Japanese

[Application Specification](#)

English

[MTA 156 Ribbon Cable Connector Assemblies \(English And Spanish\)](#)

English

[MTA 156 Ribbon Cable Connector Assemblies \(English And Spanish\)](#)

Japanese

Agency Approvals

[UL](#)

English

[UL](#)

English

3-644460-3

3 Position, Receptacle, Connector Assembly, Insulation Displacement (IDC), Wire-to-Board, Gold (Au) / Gold Flash over Palladium Nickel, MTA 156

