




MTA 100

TE Internal #: 3-644695-4  
PCB Mount Header, Vertical, Wire-to-Board, 4 Position, 2.54 mm [.1 in] Centerline, Breakaway, Tin (Sn), Through Hole - Solder, Signal, MTA 100

[View on TE.com >](#)

Connectors > PCB Connectors > PCB Headers & Receptacles > Polyester Vertical PCB Header: 2.54mm, Breakaway, MTA 100

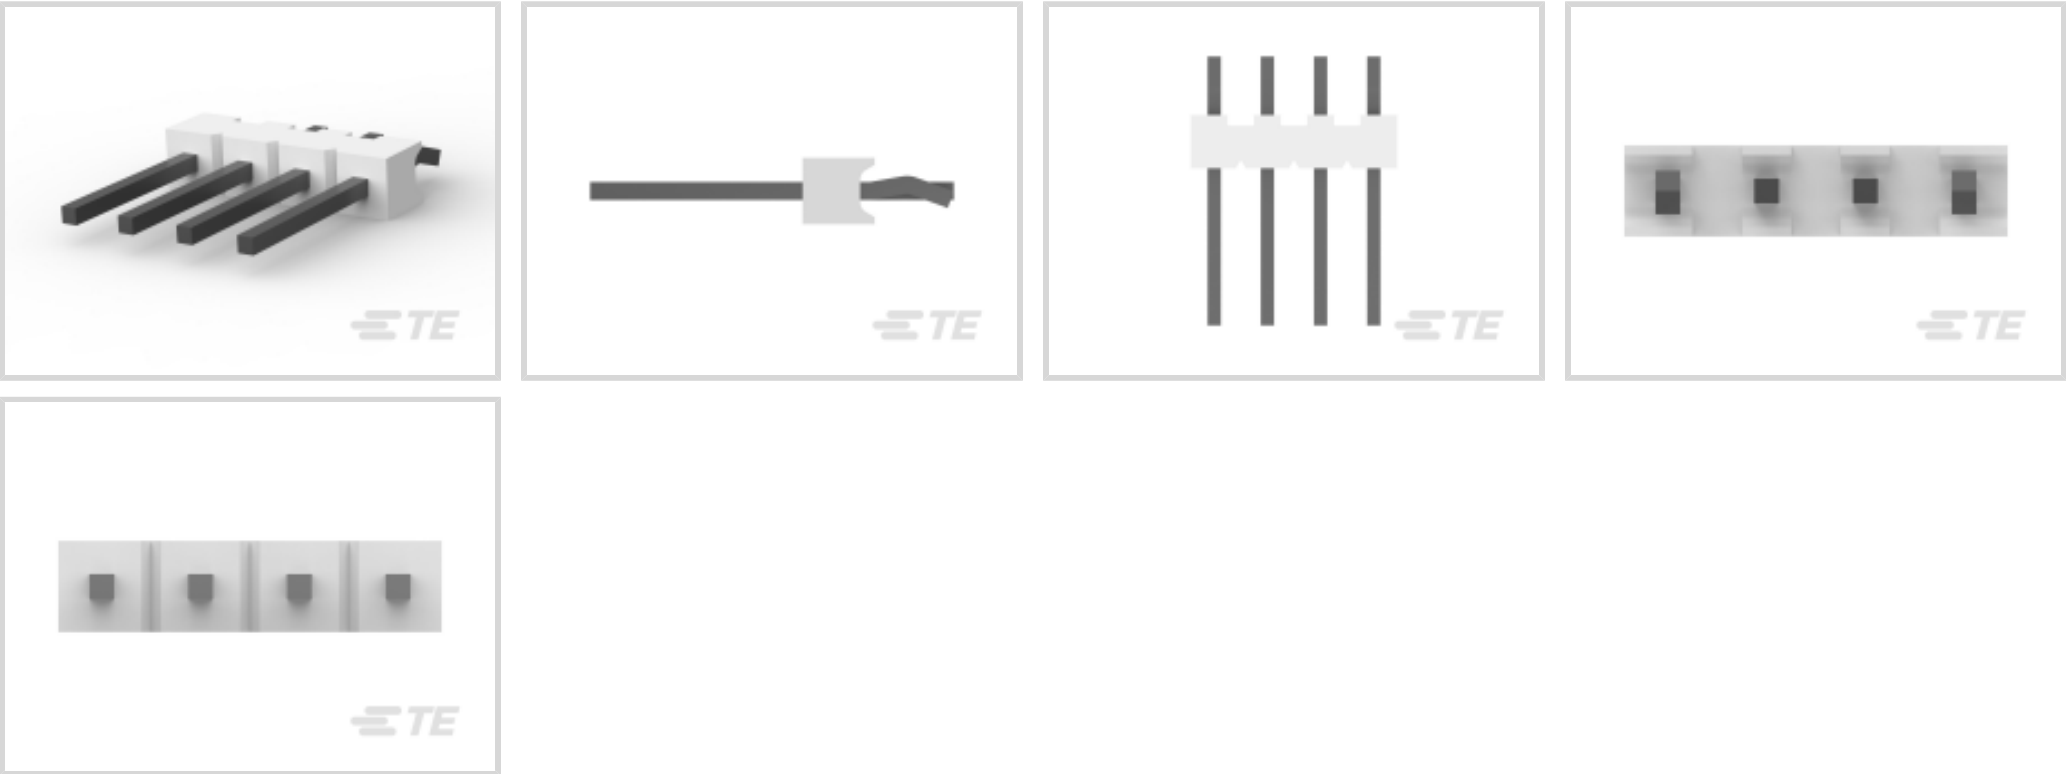

PCB Connector Type: **PCB Mount Header**  
PCB Mount Orientation: **Vertical**  
Connector System: **Wire-to-Board**  
Number of Positions: **4**  
Centerline (Pitch): **2.54 mm [.1 in]**

[All Polyester Vertical PCB Header: 2.54mm, Breakaway, MTA 100 \(27\)](#)

Features

Product Type Features

|                                   |                       |
|-----------------------------------|-----------------------|
| PCB Connector Type                | PCB Mount Header      |
| Connector System                  | Wire-to-Board         |
| Header Type                       | Breakaway             |
| Sealable                          | No                    |
| Connector & Contact Terminates To | Printed Circuit Board |
| Connector Product Type            | Connector Assembly    |

Configuration Features

|                       |          |
|-----------------------|----------|
| Number of Columns     | 4        |
| PCB Mount Orientation | Vertical |
| Number of Positions   | 4        |
| Number of Rows        | 1        |

Electrical Characteristics

|  |  |
|--|--|
|  |  |
|--|--|



|                   |         |
|-------------------|---------|
| Operating Voltage | 250 VAC |
|-------------------|---------|

Body Features

|                       |         |
|-----------------------|---------|
| Connector Profile     | Narrow  |
| Primary Product Color | Natural |

Contact Features

|                                                         |                               |
|---------------------------------------------------------|-------------------------------|
| Contact Underplating Material                           | Nickel                        |
| Contact Underplating Material Thickness                 | 1.27 µm[50 µin]               |
| PCB Contact Termination Area Plating Material Finish    | Matte                         |
| Mating Square Post Dimension                            | .64 mm[.025 in]               |
| PCB Contact Termination Area Plating Material Thickness | 3.81 – 8.89 µm[150 – 350 µin] |
| Contact Shape & Form                                    | Square                        |
| Contact Layout                                          | Inline                        |
| Contact Mating Area Length                              | 7.49 mm[.295 in]              |
| Contact Base Material                                   | Copper Alloy                  |
| PCB Contact Termination Area Plating Material           | Tin                           |
| Contact Mating Area Plating Material                    | Tin (Sn)                      |
| Contact Mating Area Plating Material Finish             | Matte                         |
| Contact Mating Area Plating Material Thickness          | 3.81 µm[150 µin]              |
| Contact Type                                            | Pin                           |
| Contact Current Rating (Max)                            | 5 A                           |

Termination Features

|                                          |                       |
|------------------------------------------|-----------------------|
| Termination Post & Tail Length           | 2.79 mm[.109 in]      |
| Square Termination Post & Tail Dimension | .64 mm[.025 in]       |
| Termination Method to PCB                | Through Hole - Solder |

Mechanical Attachment

|                          |               |
|--------------------------|---------------|
| Panel Mount Feature      | Without       |
| PCB Mount Retention Type | Retention Leg |
| PCB Mount Alignment      | Without       |
| Mating Retention         | Without       |
| PCB Mount Retention      | With          |
| Connector Mounting Type  | Board Mount   |
| Mating Alignment         | Without       |



Housing Features

|                    |                |
|--------------------|----------------|
| Centerline (Pitch) | 2.54 mm[.1 in] |
| Housing Material   | Polyester GF   |

Dimensions

|                             |                   |
|-----------------------------|-------------------|
| Connector Width             | 2.34 mm[.092 in]  |
| PCB Thickness (Recommended) | 1.6 mm[.063 in]   |
| Connector Height            | 10.03 mm[.395 in] |
| Connector Length            | 9.86 mm[.388 in]  |

Usage Conditions

|                             |                            |
|-----------------------------|----------------------------|
| Operating Temperature Range | -55 – 105 °C[-67 – 221 °F] |
|-----------------------------|----------------------------|

Operation/Application

|                     |        |
|---------------------|--------|
| Circuit Application | Signal |
|---------------------|--------|

Industry Standards

|                                             |                       |
|---------------------------------------------|-----------------------|
| Compatible With Agency/Standards Products   | CSA, UL               |
| Compatible With Approved Standards Products | CSA LR7189, UL E28476 |
| UL Flammability Rating                      | UL 94V-0              |

Packaging Features

|                    |          |
|--------------------|----------|
| Packaging Quantity | 500      |
| Packaging Method   | Bag, Box |

Product Compliance

For compliance documentation, visit the product page on TE.com>

|                                               |                                                                                                                                 |
|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                       |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                       |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                                                         |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2025 (250)<br>Candidate List Declared Against: JUNE 2025 (250)<br>Does not contain REACH SVHC |
| Halogen Content                               | Not Low Halogen - contains Br or Cl > 900 ppm.                                                                                  |
| Solder Process Capability                     | Wave solder capable to 240°C                                                                                                    |



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 1375820-4  
CST-100 II HOUSING 4 POS



TE Part # 58246-1  
MTA 100 CRIMP HEAD REPAIR DISCRETE




TE Part # 58579-1  
MTA 100 MANUAL TOOL ASSEMBLY DISCRETE



TE Part # CAT-104MTA-NTPNR  
MTA Receptacle: Nylon, Tin Plated, 2.54 mm



TE Part # CAT-104MTA-PLSCC  
Polyester PCB Connector Covers: 2.54 mm, MTA 100

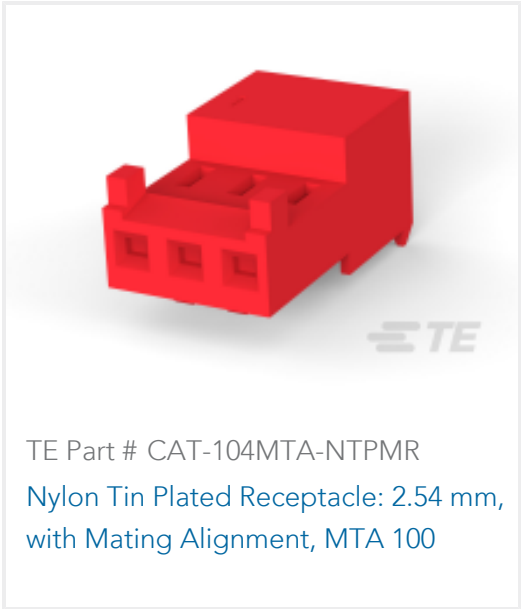

TE Part # CAT-104MTA-NTPMR  
Nylon Tin Plated Receptacle: 2.54 mm, with Mating Alignment, MTA 100




TE Part # CAT-104MTA-NYLCC  
Nylon PCB Connector Covers: 2.54 mm, MTA 100

Also in the Series | MTA 100




Connector Caps & Covers(69)

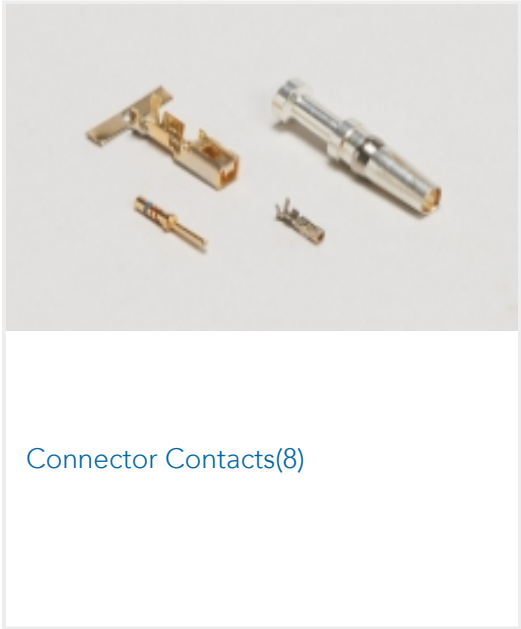

Connector Contacts(8)



Connector Hardware(1)

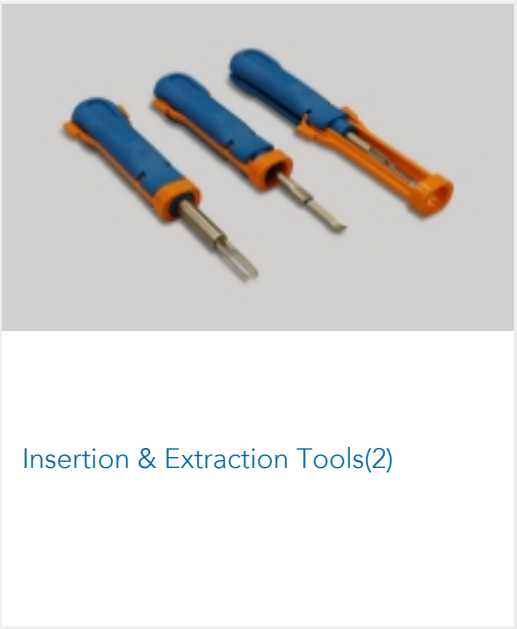

Insertion & Extraction Tools(2)



PCB Headers & Receptacles(441)



Rectangular Power Connectors(1)



Wire-to-Board Connector Assemblies & Housings(457)



Wire-to-Board Headers & Receptacles (441)

Customers Also Bought

TE Part #CONMMCX001-SMD  
MMCX Jack 50 Ohm PCB Surface Mount

TE Part #DBA6171C3-BSMAM  
DIPOLE, SMAM, SWIVEL, 617-7125MHz, OUTDOOR TE

TE Part #L9000082-01  
Antenna Dipole 2.4GHz Tilt Swivel SMA

TE Part #OF86315-FNF  
OMNI, FG, 863-928MHz, 5dBi

TE Part #CONMMCX001-SMD-T  
MMCX Jack 50 Ohm PCB Surface Mount

TE Part #L000618-01  
Antenna LTE VDP adhesive Bk 1M SMA Plug

TE Part #FG24008  
OMNI, FG, 2400-2485MHz 2442.5MHz, 6dBd

TE Part #1775862-2  
mSATA/mini PCI-E 5.2H Type I G/F

TE Part #5413631-1  
JACK, RTANG, PCB, 50 OHM, BNC

TE Part #1-5750913-9  
100 50SR CABLE CONN KIT

Documents

Product Drawings

04P MTA100 STR HDR RETENTIVE

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_3-644695-4\_G.2d\_dxf.zip



English

Customer View Model

[ENG\\_CVM\\_CVM\\_3-644695-4\\_G.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_3-644695-4\\_G.3d\\_stp.zip](#)

English

Customer View Model

[ENG\\_CVM\\_3-644695-4\\_E1.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_3-644695-4\\_E1.3d\\_stp.zip](#)

English

Customer View Model

[ENG\\_CVM\\_3-644695-4\\_E1.2d\\_dxf.zip](#)

English

3D PDF

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Application Specification](#)

English

Agency Approvals

[Agency Approval Document](#)

English