



Automotive Parts > Automotive Terminals > MCON 1.2 Locking Lance Receptacle and Tab Terminals



Terminal Type: **Receptacle**
Wire Size: **23 – 22 AWG**
Mating Tab Width: **1.2 mm [.047 in]**
Interface Plating: **Tin (Sn)**

[All MCON 1.2 Locking Lance Receptacle and Tab Terminals \(14\)](#)

Features

Product Type Features

Receptacle Style	180°
Primary Locking Feature	Locking Lance
Sealable	Yes

Body Features

Terminal Seal Type	Single Wire Seal (SWS)
--------------------	------------------------

Contact Features

Typical Current Rating	10 A
Crimp Type	F-Crimp
Contact Size	1.2mm
Contact Fabrication	Stamped & Formed
Wire Contact Termination Area Plating Material	Tin
Terminal Type	Receptacle
Mating Tab Width	1.2 mm[.047 in]



Interface Plating	Tin (Sn)
Mating Tab Thickness	.6 mm[.024 in]

Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire

Dimensions

Compatible Insulation Diameter Range	1.1 – 1.75 mm[.043 – .069 in]
Wire Size	23 – 22 AWG
Wire Size Search	.25 mm², .3 mm²
Tab Length	16 mm[.63 in]

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature (Max)	130 °C[266 °F]
Operating Temperature Range	-40 – 130 °C[-40 – 266 °F]

Operation/Application

Compatible With Wire Base Material	Copper
Conforms to Automation Guideline	Yes, DIN 72036 Automation of Wiring Harness Production, Version June 2024, Yes, KOMAX Guideline for automatic component insertion for electrical connections, Version 5.0 (March 2018)

Industry Standards

Compatible With Agency/Standards Products	DIN 72036
---	-----------

Packaging Features

Packaging Method	Reel
Packaging Quantity	6000

Other

Terminal Transmits	0 – 24 A (Low Power)
--------------------	----------------------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant

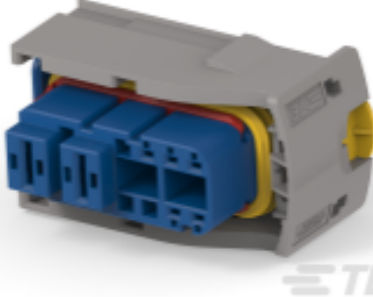
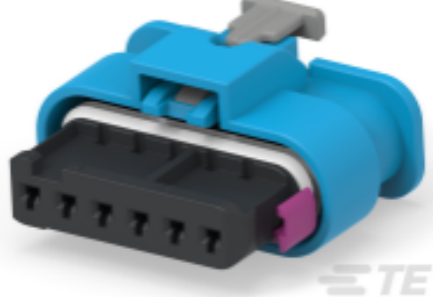
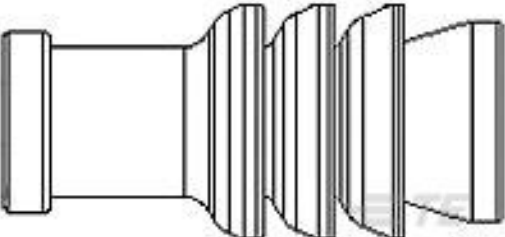


China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 TE Part # 1-2141564-0 10POS, MIXED,REC HSG,ASSY, SEALED,BU	 TE Part # 1-2236896-3 2POS, MCON 1.2 LL REC SEALED	 TE Part # 1801600-4 RECEPTACLE HOUSING, MCON, 10 W, SEALED	 TE Part # CAT-N14-RC4812 48V Ready 1.2mm Sealed Connectors
 TE Part # 1801600-5 RECEPTACLE HOUSING, MCON, 10 W, SEALED	 TE Part # 2-2236898-1 5POS, MCON 1.2 LL REC SEALED	 TE Part # 967067-1 MQS SGL WIRE SEAL	 TE Part # 1801600-1 RECEPTACLE HOUSING, MCON, 10 W, SEALED



TE Part # 2-1718643-1 2POS, MCON 1.2 LL REC SEALED	TE Part # 2305570-1 Strip Terminal Cutter-Side Feed-No Crimp	TE Part # 2-2236343-1 3POS, MCON 1.2 LL REC SEALED	TE Part # 2050086-1 MCON1.2 2P REC. HOUSING
TE Part # 2-2236343-5 3POS, MCON 1.2 LL REC SEALED	TE Part # 5-1579007-3 EXTRACTION TOOL	TE Part # 967067-2 MQS EINZELLEITDICHT	TE Part # 1-2236898-1 5POS, MCON 1.2 LL REC SEALED
TE Part # 1-2236343-5 3POS, MCON 1.2 LL REC SEALED	TE Part # 1-2236896-5 2POS, MCON 1.2 LL REC SEALED	TE Part # 964972-1 EINZELLEITERDICHTNG	TE Part # 7-2151041-7 OCEAN_2.0_SPARE_PART_KIT-050F1200

Also in the Series | MCON 1.2mm

Automotive Connector Caps & Covers (15)	Automotive Housings(354)	Automotive Seals & Cavity Plugs(16)	Automotive Terminals(90)
--	---------------------------------	--	---------------------------------

Customers Also Bought

TE Part #967067-1 MQS SGL WIRE SEAL	TE Part #7-1452668-3 MCON 1.2 LL REC SWS AG	TE Part #1801175-3 2W RECEPTACLE HP CONNECTOR GREY	TE Part #1-1801175-3 2W RECEPTACLE HP CONNECTOR GREY
--	--	---	---





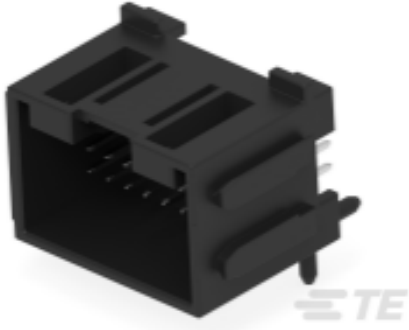
TE Part #1-1801175-5
2W RECEPTACLE HP CONNECTOR
GREEN



TE Part #1801177-4
3W TAB CONNECTOR HP YELLOW



TE Part #1-1801466-1
COVER, FIXED, 2 WAY HP
CONNECTOR



TE Part #2320178-1
16POS,TAB0.63X0.63,HDR ASSY,
180DEG,SLDR

TE Part #6-2331712-1
2POS,PCON21,HDR ASSY,COD A



TE Part #2359930-2
6POS,MQS,TAB HSG,UNSLD,COD B

Documents

Product Drawings

MCON 1.2 LL REC SWS SN

English

MCON 1.2 LL REC SWS SN

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_7-1452665-1_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_7-1452665-1_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_7-1452665-1_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

German

Application Specification

English

Application Specification

English

7-1452665-1

Receptacle Terminal, 23 – 22 AWG, .25 – .35 mm² Wire, 1.2 mm [.047 in] Tab Width, Tin (Sn), Sealable, .6 mm [.024 in] Tab Thickness, MCON 1.2mm

