
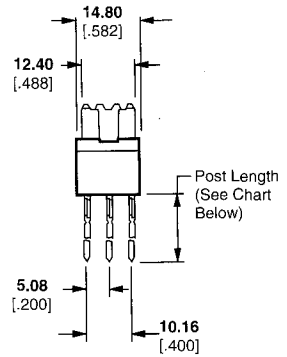
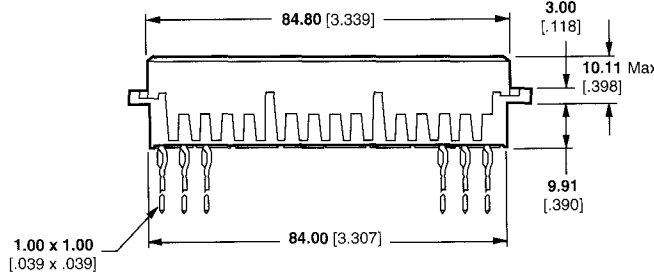
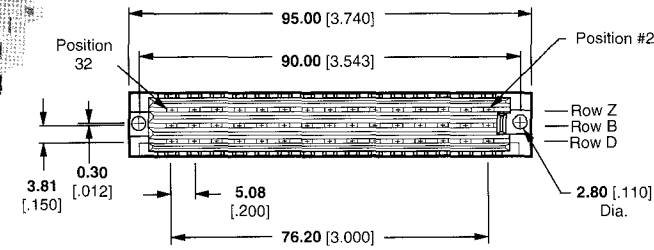


**Type F Vertical Receptacle Assemblies with ACTION PIN Posts
(1.00 [.039] Square)**

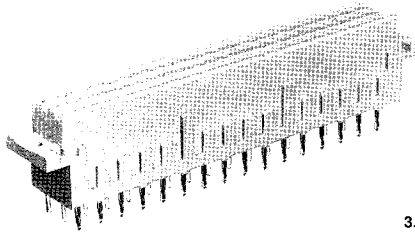

Material

Housing — Glass filled polymer

Contacts — Copper alloy

Related Product Data

DIN Performance Levels — Page 6

Performance Specifications — Page 8

Mateable Connectors — Pages 36, 39

PC Board Hole Layout — Page 61

Accessories — Page 68, 69

ACTION PIN Contacts — Pages 70, 71

Application Tooling — Pages 72, 73

Technical Documents — Page 74:

DIN Specification 41612

IEC Specification 60603-2

Instruction Sheet 408-6927

Application Specification 114-19004

Standard Size (for PC Board Thicknesses 2.36 [.093] and Above)

Number of Positions	Rows Loaded	DIN Level	Part Number	
			6.00 [.236] ¹ Post Length	Wrap Type 22.00 [.866] Post Length
48	Z,B,D	II	166648-4	—
		III	2-166648-4 ²	—
32	Z,B	II	166649-4	—
		III	166649-8	166594-8

¹ Pre-notched to break off at 6.00 [.236] from bottom of connector.

² Extended ends of posts already broken off (only for 2-166648-4).

Connectors on this page are toolless (flat rock).

Type F Assemblies