



Search:

Go

Products

Catalogs

Search

Customer Support

About Cannon

Home




# Micro D, Commercial

PART NUMBER: MDS-S-TS


Image Disclaimer:  
Please use Customer Drawing for design activity: line art and other pictures are general representations of product dimensions.


[View Line Drawings](#)

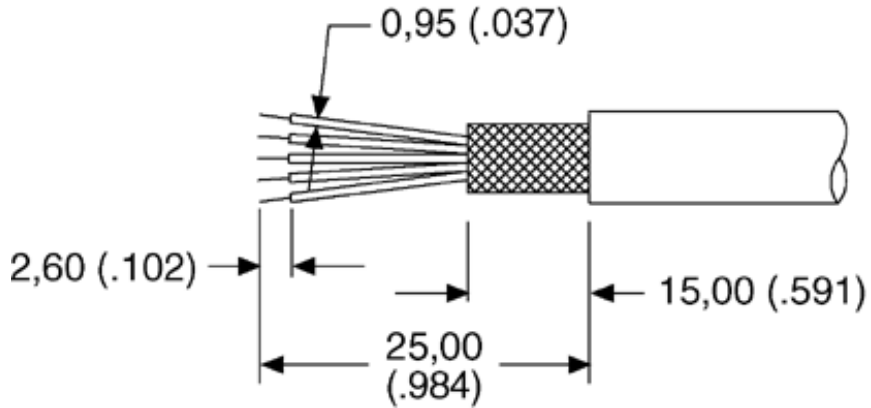

- Sales Support
- Ask a Specialist
- Product Home
- Stock Check

<b>Where Sold</b>	Asia Pacific, Americas, Europe
<b>Product Group</b>	D-Subminiature
<b>Product Sub-Family</b>	D-Sub Micro
<b>Component Type</b>	Contacts
<b>Application Type</b>	Commercial
<b>Cable or PC Board</b>	Cable
<b>Gender</b>	Receptacle
<b>Number of Signal Pins</b>	1000 Reel
<b>Number of Size 8 contacts</b>	0
<b>Straight or Right Angle</b>	Straight
<b>Contact Plating</b>	Palladium Nickel
<b>Other Features</b>	Stamped Contacts (Micro)
<b>Contact Termination</b>	Crimp 26-30 AWG
<b>Temperature Rating</b>	-55°C to +125°C
<b>Current Capacity</b>	1 A -- Temperature Dependant
<b>Contact Resistance</b>	20 milli ohms max.
<b>Dielectric Withstanding Voltage</b>	350 V AC at Sea Level
<b>Reference Industry Specifications</b>	UL File Number E8572, SSA (Serial Storage Architecture)
<b>Contact Material</b>	Copper Alloy
<b>Other Information</b>	See Tooling Section for Crimp Tools

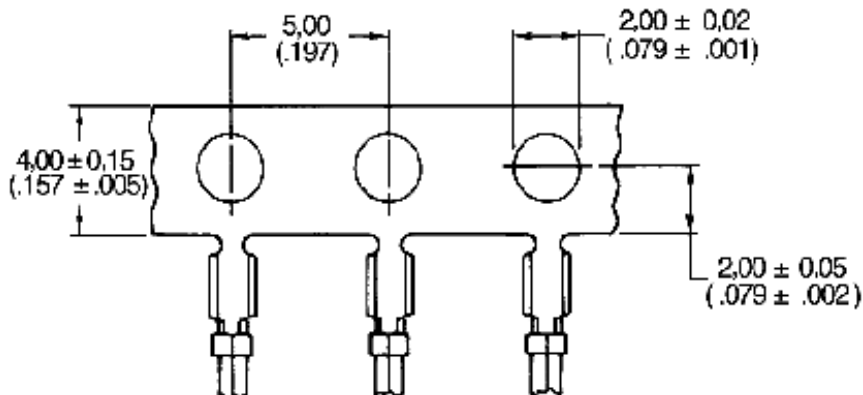

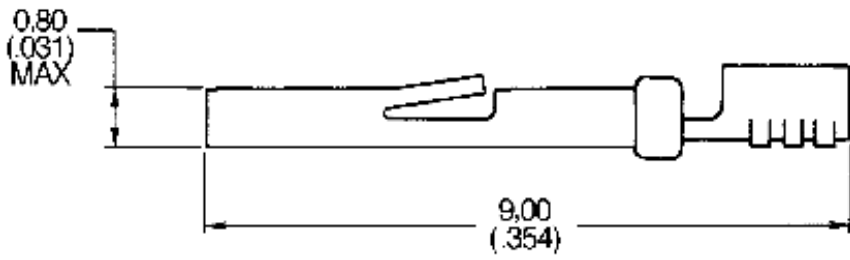

[Sign In](#) | [Contact Us](#) | [Legal Disclaimer](#) | [Privacy Policy](#) | [Home](#)  
© 2006 ITT Industries