

6

5

4



3

2

1

used for:

DIN 41617

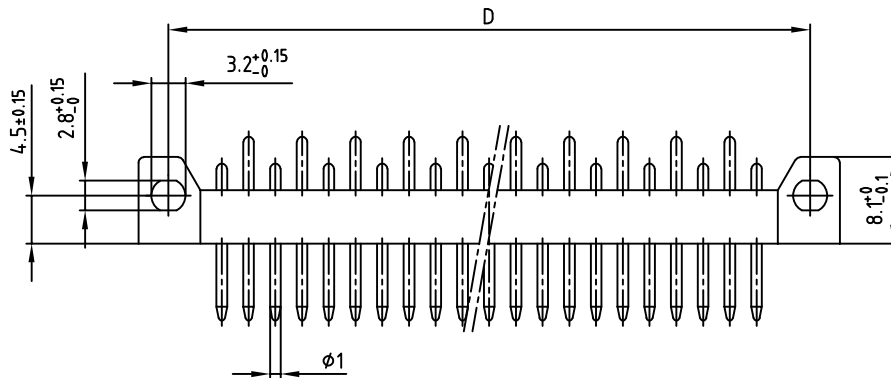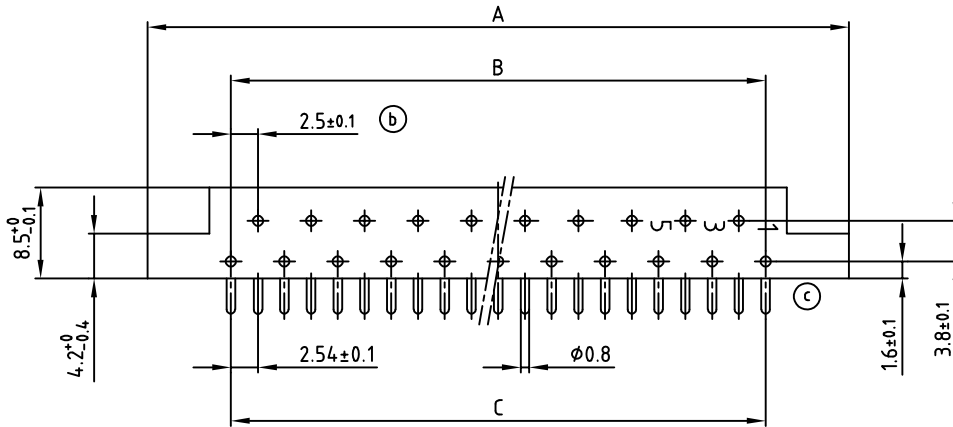

Polzahl No. of pos.	A ±0.2	B ±0.1 (b)	C ±0.1	D ±0.1	Art.-Nr. Part-No
13	45.6	12x2.5=30	12x2.54=30.48	40	101A10089X
21	65.6	20x2.5=50	20x2.54=50.80	60	101A10109X
31	90.6	30x2.5=75	30x2.54=76.20	85	101A10129X


NOTES:

1. INSULATOR: PC GF UL 94 V-1, GREY

2. CONTACTS: COPPER ALLOY

PLATING: GOLD OVER NICKEL

50 MATING CYCLES

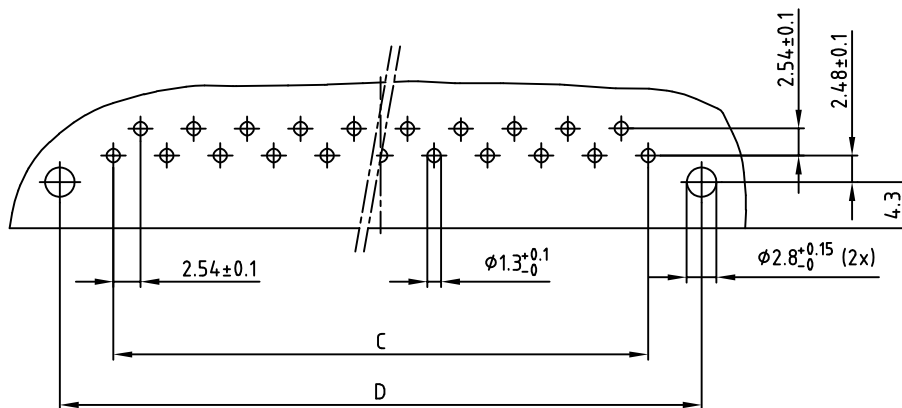3. CONNECTOR IS PART MARKED: PART-NO CONEC ABCP.C.B. HOLE DRILLINGS
(P.C.B. TOP SIDE)

RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

DO NOT ALTER CAD DRAWING BY HAND

1 x c	Ä23-0990	26.06.2023	JLE
2 x b	Ä5359	25.09.2014	K.H.
a	Original		
rev.	description	date	name

2013	date	name
drawn	27.06.	Henneboel
appd.	27.06.	Koch
norm	DIN 41617	

CONEC

scale:		2:1	
material:		SEE NOTES	
title:		MALE CONNECTOR 13pos.-31pos. / 2.54mm with angled solder pins	
dwg no:		DIN-A 3 sh: 1/1	
part no:		SEE TABLE	