
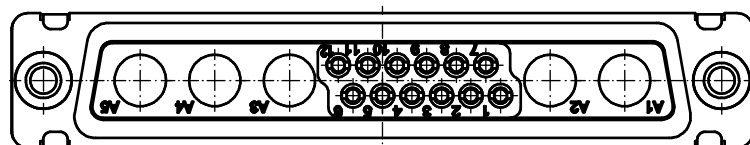

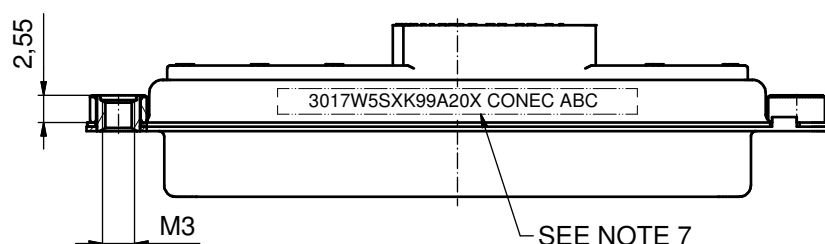
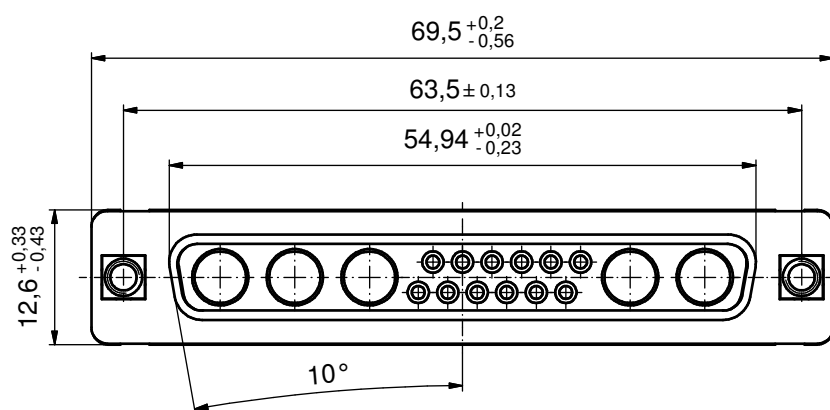
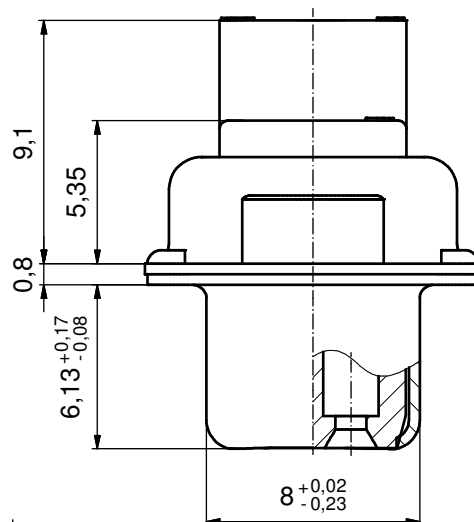


(5:1)

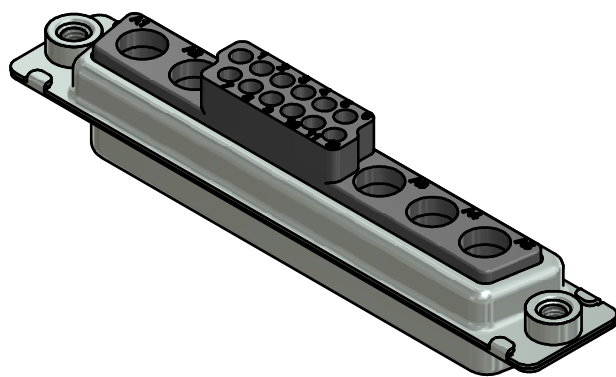

NOTES:

1. METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
2. INSULATORS: PBT GF UL 94 V-0; BLACK
3. CONNECTOR WILL BE SUPPLIED WITHOUT CONTACTS
4. THREADED INSERTS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
5. COLLARS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
6. MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
7. CONNECTOR IS PART MARKED: 3017W5SXXK99A20X CONEC ABC

RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH										tolerance		 dim. in mm	scale: 2:1 (5:1)						
													material: SEE NOTES						
														date	name	title: D-SUB COMBINATION FEMALE 17W5S Crimp Style with threaded insert			
														drawn 09.05.16	Henneboel				
														appd. 10.05.16	Schmidt				
				norm		dwg no: 13K1A5210													
				d-old						DIN-A3 sh: 1									
a	Original					part no: 3017W5SXXK99A20X													
rev.	description	date	name																

CONEC®