

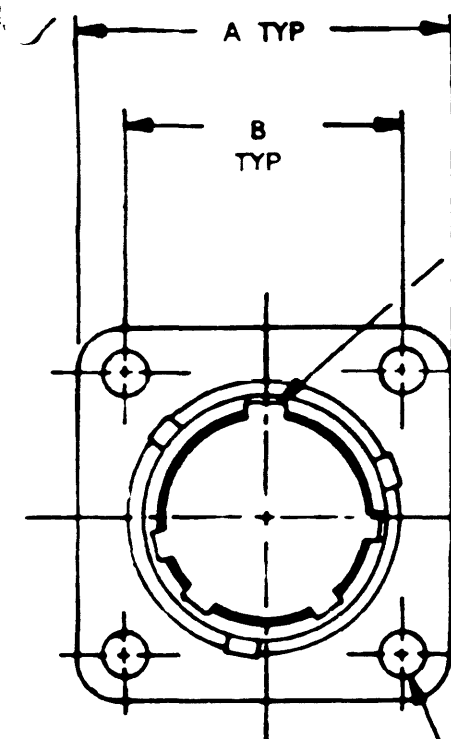


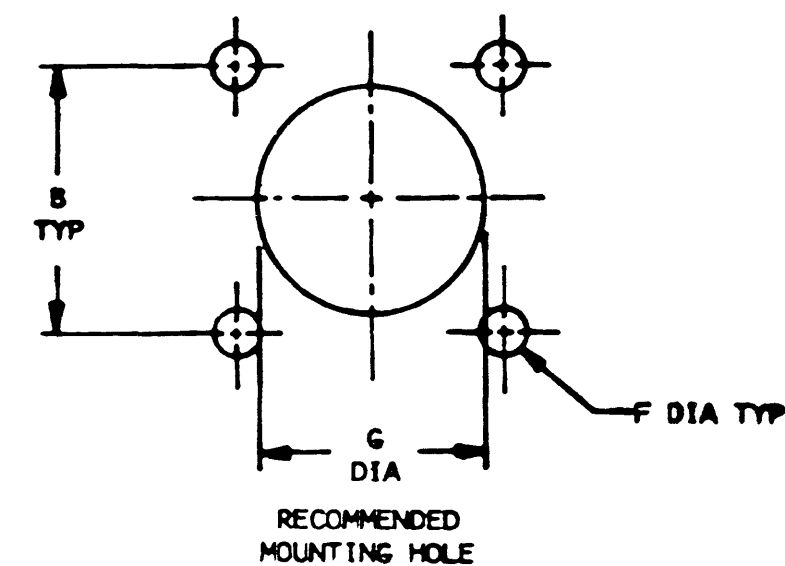

MAIN POLARIZING
KEYWAY

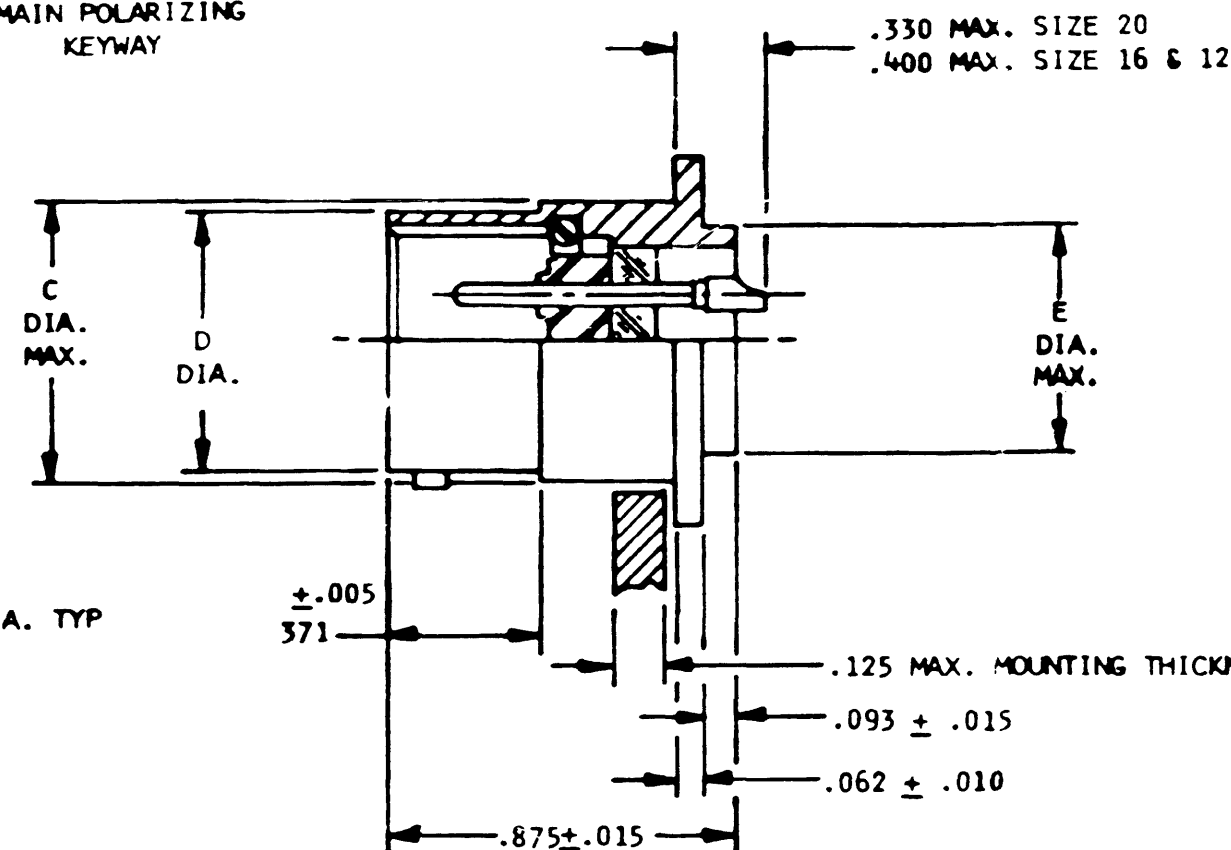

RECOMMENDED
MOUNTING HOLE

DL60H-X-xx

REVISIONS

SYM	DESCRIPTION	DATE	APPROVED
3	REVISED PER E.O. 91516	3-9-83	T. H. H.

3. MATERIAL:
SHELL - MILD STEEL
CONTACTS - HIGH NICKEL - IRON ALLOY
INSERT, PIN FRONT - ELASTOMER
INSERT, HERMETIC - COMPRESSION GLASS
"O" RING - SILICONE BASE ELASTOMER

2. FINISH:
SHELL - TIN OVER NICKEL
CONTACTS - GOLD PLATED

1. FOR AVAILABLE CONTACT ARRANGEMENTS AND
ALTERNATE CLOCKING POSITIONS, SEE PAGE
94500 IN DL SECTION OF CATALOG.

NOTE:

PART NO.	A $\pm$.005	B $\pm$.005	C	D $\pm$.000 - .005	E	F $\pm$.000 - .009	G $\pm$.010 - .000 FOR C	G $\pm$.010 - .000 FOR E	APPROX. WT. IN LBS.
DL60H-8-xx	.812	.594	.561	.536	.500	.125	.620	.505	
DL60H-10-xx	.937	.719	.696	.659	.562	.125	.748	.572	
DL60H-12-xx	1.031	.812	.875	.829	.750	.125	.913	.760	
DL60H-14-xx	1.125	.906	.935	.898	.812	.125	.980	.822	
DL60H-16-xx	1.250	.969	1.062	1.025	.937	.125	1.107	.948	
DL60H-18-xx	1.343	1.062	1.187	1.131	1.062	.125	1.209	1.072	
DL60H-20-xx	1.437	1.156	1.312	1.256	1.187	.125	1.337	1.192	
DL60H-22-xx	1.562	1.250	1.437	1.381	1.312	.125	1.452	1.322	
DL60H-24-xx	1.703	1.375	1.554	1.504	1.437	.154	1.577	1.442	

DR	SIGNATURE & DATE
CHK	MARTIN 3-10-69
PE	F. H. H. 3-11-69
APPD	T. H. H. 3-10-83
SCALE	NONE WT

RECEPTACLE,
CONNECTOR, HERMETIC,
TRI-KAM COUPLING,
SQUARE FLANGE MOUNTING
MIL-C-88723 TYPE
(ENVELOPE)

CP	THE DEUTSCH COMPANY
	ELECTRONIC COMPONENTS DIVISION
	Municipal Airport
	Banning, California
B	DL60H-X-xx
2WG SIZE	CODE 11139
	SHEET 1 OF 1