




▲ SWITCH FUNCTION

POS. 1	POS. 2
1-2 ON 3-4 OFF	1-2 (OFF) 3-4 (ON)

() = MOMENTARY



▲ SPDT ON-(OFF) / OFF-(ON) CONTACT CONFIGURATION
() DENOTES MOMENTARY FUNCTION

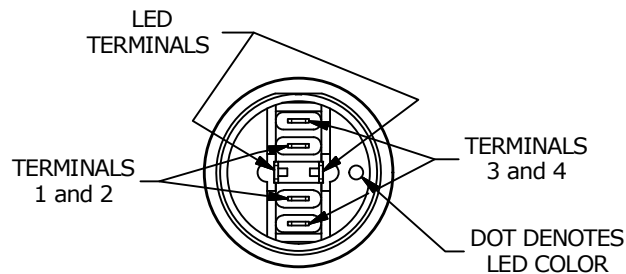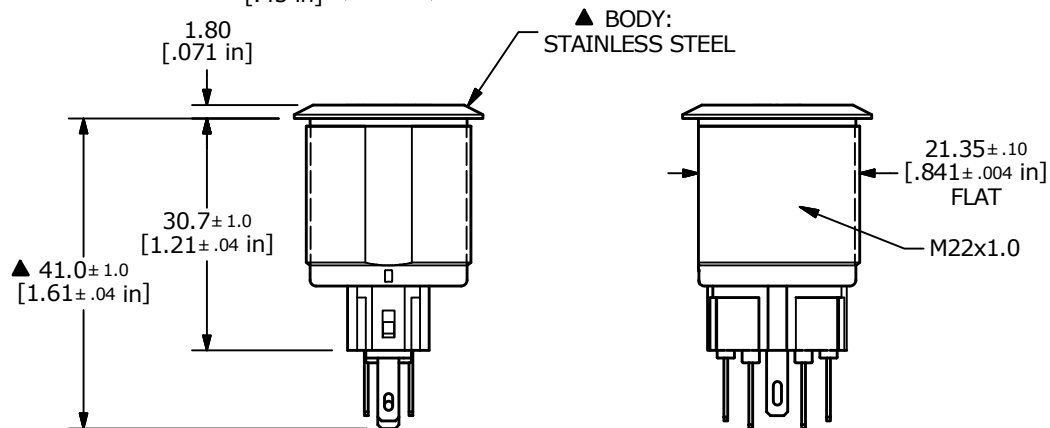

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF. ONLY
4. RATING: 2A @ 48VDC
5. ILLUMINATION VOLTAGE: 12V
6. CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
7. INSULATION RESISTANCE: 1,000MΩ @ 500VDC
8. DIELECTRIC STRENGTH: 2,000VAC MIN. FOR 1 MINUTE
9. ELECTRICAL LIFE: 50,000 CYCLES
10. OPERATING TEMPERATURE: -20°C to 55°C
11. INGRESS PROTECTION: IP65
12. ▲ DENOTES CRITICAL PARAMETER
13. ILLUMINATION COLOR: BLUE (FORWARD), BLUE (REVERSE)
- ▲ 14. HARDWARE INCLUDED (NOT SHOWN) HEX NUT AND O-RING

C	23651	align terminals to flat and add bottom view	10/31/18	MW
B	21426	BODY WAS 5MM SHORTER	4/4/14	EBP
A	21357	RELEASE FOR PRODUCTION	1/17/14	EBP
REV	PCR NO	DESCRIPTION	DATE	BY



TITLE PV7F2Y0SS-344-M10				
SCALE	DATE	DR	DWG	REV
1:1	1/17/2014	EBP	52-PV7F2Y0SS344M10	C