
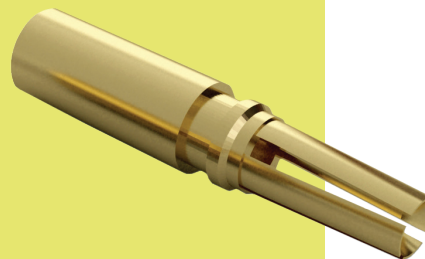





Gecko Screw-Lok Connectors

Female Crimp Contacts, Dummy Contact

- ❖ 4-finger Beryllium Copper contact on a female connector.
- ❖ Crimp barrel meets all crimp guidelines and standards.
- ❖ 2A current capacity, resists high vibration and shock.
- ❖ Withstands extremes of temperature: -65°C to +150°C.
- ❖ Instruction video online at www.harwin.com/harwintv.
- ❖ Dummy Contact can be used for additional polarization of keying of multiple connectors. Also called Blanking Plug.

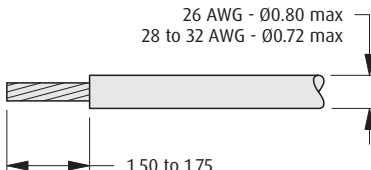

CONTACTS		DUMMY CONTACT									
26 AWG 											
28 – 32 AWG Ident Groove 		WIRE STRIPPING DETAILS									
											
TOOLS											
Recommended Crimp Tool – Z125-900 Positioner – Z125-901 Contact Insertion/Removal Tool – Z125-902		❖ Female crimp housings shown on previous pages. ❖ Pre-cabled contacts shown on following page. ❖ Instruction sheets available at www.harwin.com/instructions.									
HOW TO ORDER											
SERIES CODE G125 0XX 00 05 TYPE <table><tr><td>001</td><td>Female 26 AWG crimp contact</td></tr><tr><td>002</td><td>Female 28-32 AWG crimp contact</td></tr><tr><td>020</td><td>Dummy Contact (blanking plug)</td></tr></table> FINISH <table><tr><td>05</td><td>Gold</td></tr></table>				001	Female 26 AWG crimp contact	002	Female 28-32 AWG crimp contact	020	Dummy Contact (blanking plug)	05	Gold
001	Female 26 AWG crimp contact										
002	Female 28-32 AWG crimp contact										
020	Dummy Contact (blanking plug)										
05	Gold										

All dimensions in mm.

Patent Published