


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

REVISIONS


ISSUE	CHANGES
3	CN 36706 C REDRAWN KH 11/30/95

1709-1

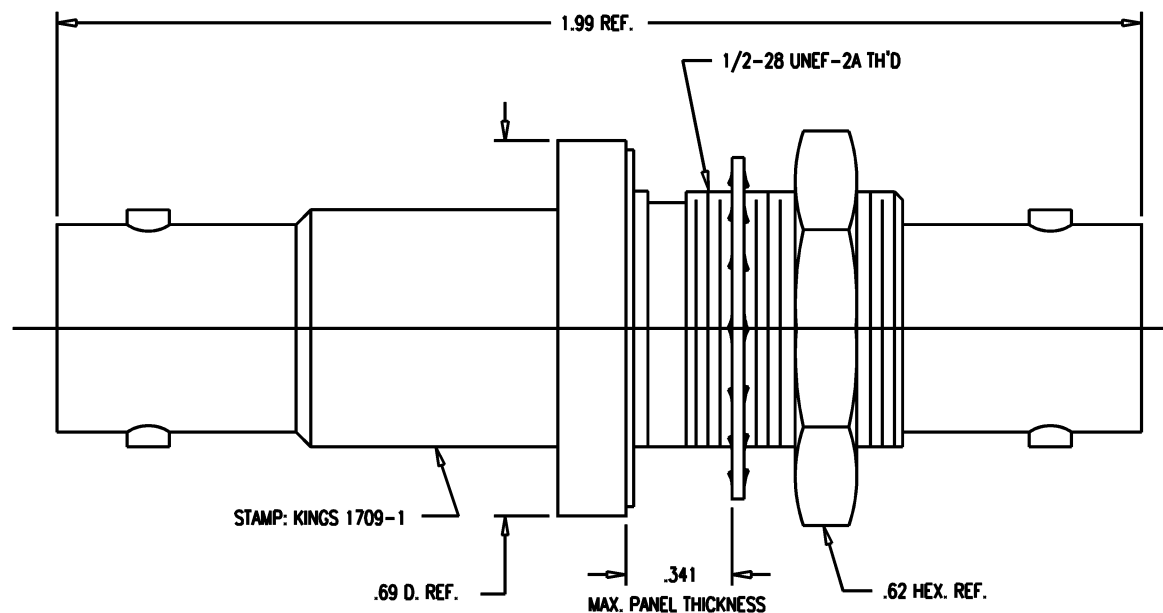

NOTES:

1. INTERFACE PER MIL-STD-348, FIG. 314-1.
2. MATERIALS:
GASKET: SILICONE RUBBER, ZZ-R-765
INSULATOR: TEFLON, ASTM-D-4894
LOCKWASHER: PHOSPHOR BRONZE, ASTM-B-103
ALL OTHER METAL PARTS: BRASS, ASTM-B16
3. FINISHES:
CENTER CONTACT: GOLD PLATE PER MIL-G-45204
ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT NICKEL FINISH (TR-5)
4. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: NON-CONSTANT
VOLTAGE RATING: 3500 VRMS
5000 VDC



MOUNTING HOLE

KAM6256

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF:

ADPT M-M, BKHD, SHV

DRAWN	KH	04/30/92
DESIGN	AR	10/01/92
APPR.		DATE

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

1709-1

GSD