



LTR	REVISION	DATE	APPD
A	011520-GP01: UPDATED TEST DATA AND ADDED OPERATING TEMP. RANGE	01-15-20	GP



ACTUAL SIZE

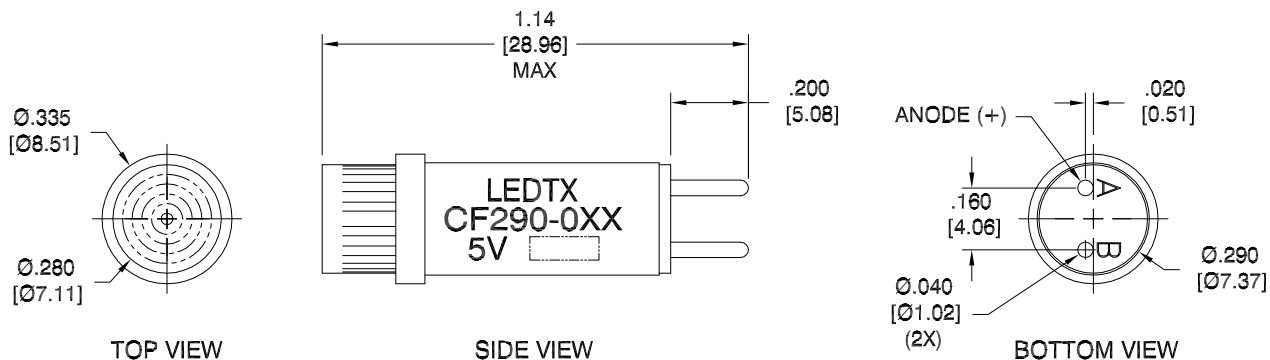

NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. MOUNTING DIAMETER: $\varnothing 9/32$ "
3. LENS MATERIAL: LEXAN 101-112
4. SLEEVE MATERIAL / COLOR: NYLON 66 (DUPONT: ZYTEL 101L) / BLACK
5. HEADER MATERIAL / COLOR: NYLON 66 (DUPONT: ZYTEL 101L) / BLACK
6. OPERATING TEMPERATURE: $\sim -30^{\circ}\text{C}$ to $\sim +50^{\circ}\text{C}$

REVISION NOTIFICATION
<input type="checkbox"/> DLC
<input type="checkbox"/> UL/ETL
<input type="checkbox"/> MADE IN USA
<input type="checkbox"/> CUSTOMER _____
<input type="checkbox"/> OTHER _____
REDLINE CHECKLIST
<input type="checkbox"/> REDLINE(YES)
<input type="checkbox"/> DATE: _____
<input type="checkbox"/> INITIATED BY: _____
<input type="checkbox"/> ECR REQUIRED YES <input type="checkbox"/> NO <input type="checkbox"/>
<input type="checkbox"/> WORK ORDER# _____

ELECTRICAL-OPTICAL CHARACTERISTICS (Ta = 25°C)

CF290-0AG-005V	CF290CAG6K-5V-B	AQUA GREEN	5Vdc	0.07 W	0.014 A	0.666 cd	521nm	120°
CF290-0PB-005V	-	SUPER BLUE	5Vdc	0.10 W	0.020 A	0.233 cd	462nm	120°
CF290-0UG-005V	-	SUPER LIME GREEN	5Vdc	0.10 W	0.020 A	0.067 cd	575nm	120°
CF290-0UR-005V	CF290CR3K-5V-B	ULTRA RED	5Vdc	0.10 W	0.020 A	0.120 cd	652nm	120°
CF290-0UY-005V	-	SUPER YELLOW	5Vdc	0.10 W	0.020 A	0.250 cd	595nm	120°
LEDTRONICS PART NO.	DESCRIPTION PART NO.	COLOR EMITTED	INPUT VOLTAGE, V	POWER (W)	CURRENT (A)	MAXIMUM CANDELA	λ P nm	VIEWING ANGLE (FULL BEAM WIDTH @ 50% INTENSITY)

 LEDTRONICS,™ INC. 23105 KASHIWA COURT TORRANCE, CA 90505	-PROPRIETARY- This document contains Proprietary information of LEDTRONICS,™ INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS,™ INC. .XXX ± .010 TOLERANCE PER ANSI-Y14.5 .XX ± .025 (UNLESS OTHERWISE STATED) ANGLES ± 0°,30' FRACT. ± 1/32	TITLE CF290-0XX-005V (CF290CXXXK-5V-B)			
		DWG NO	SCALE	SHEET	DATE
		CF290-5V-DC	2:1	1 OF 1	08-20-09
CODE IDENT NO.	DWG BY	CHK BY	QA	MFG	R&D
8Z410	08-20-09		SB	LD	UF
			01-21-20	01-21-20	01-21-20