


LTR	REVISION	DATE	APPD
B	092222-HF01: ADDED ALTERNATE MARKING	09-27-22	HF


ALTERNATE MARKING
(#8 & #9)




TOP VIEW



TOP VIEW

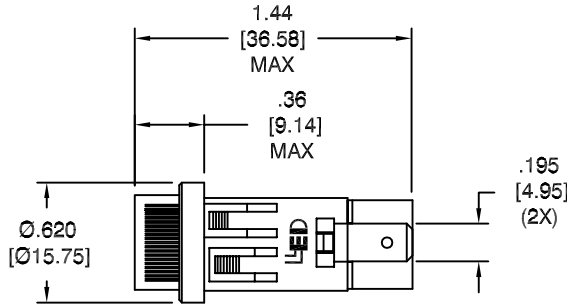

SIDE VIEW



REAR VIEW



NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. MOUNTING DIAMETER: Ø1/2" (12.7mm)
3. LENS MATERIAL: POLYCARBONATE (PC) (UL 94V-2)
4. SLEEVE MATERIAL / COLOR: NYLON 66 (UL94V-1 MIN / UL94V-0 PREF) / BLACK
5. HEADER MATERIAL / COLOR: NYLON 66 (UL94V-1 MIN / UL94V-0 PREF) / BLACK
6. TERMINAL MATERIAL: BRASS S.A.E. CA 360, FEDERAL QQ-B-626 ALLOY 360
FINISH: TIN PLATE MIL-T-10727 TYPE I, DULL FINISH, .0001-.00025 THICK.

REVISION NOTIFICATION

- DLC
- UL/ETL
- MADE IN USA
- CUSTOMER _____
- OTHER _____

REDLINE CHECKLIST

- REDLINE(YES)
- DATE: _____
- INITIATED BY: _____
- ECR REQUIRED YES NO
- WORK ORDER# _____

ELECTRICAL-OPTICAL CHARACTERISTICS (Ta = 25°C)

1	PF50-OAG-028V-T	-	AQUA GREEN	24/28Vdc(@28Vdc)	0.010-0.015 A	5.000cd	520	180°
2	PF50-OCW-028V-T	-	COOL WHITE	24/28Vdc(@28Vdc)	0.010-0.015 A	3.000cd	8000K	180°
3	PF50-OPB-028V-T	-	SUPER BLUE	24/28Vdc(@28Vdc)	0.010-0.015 A	-	463	180°
4	PF50-OUG-028V-T	-	SUPER LIME GREEN	24/28Vdc(@28Vdc)	0.010-0.015 A	-	572	180°
5	PF50-OUO-028V-T	-	SUPER ORANGE	24/28Vdc(@28Vdc)	0.015-0.020 A	-	613	180°
6	PF50-OUR-028V-T	-	ULTRA RED	24/28Vdc(@28Vdc)	0.015-0.020 A	0.900cd	652	180°
7	PF50-OUY-028V-T	-	SUPER YELLOW	24/28Vdc(@28Vdc)	0.015-0.020 A	1.800cd	596	180°
8	PF50CG5-0004	PF50CG5-28V/20-B/T1	HI-EFF GREEN	24/28Vdc(@28Vdc)	0.015-0.020 A	-	563	180°
9	PF50CR5-0004	PF50CR5-28V/20-B/T1	HI-EFF RED	24/28Vdc(@28Vdc)	0.015-0.020 A	-	644	180°
NO.	LEDTRONICS PART NO.	DESCRIPTION PART NO.	COLOR EMITTED	INPUT VOLTAGE, V	CURRENT (A)	MAXIMUM CANDELA	λP nm	VIEWING ANGLE (FULL BEAM WIDTH @ 50% INTENSITY)

LED[®]
LEDTRONICS,™ INC.
23105 KASHIWA COURT
TORRANCE, CA 90505

-PROPRIETARY-
This document contains Proprietary information of LEDTRONICS, INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.

.XXX ± .010 TOLERANCE PER ANSI-Y14.5
.XX ± .025 (UNLESS OTHERWISE STATED)
ANGLES ± 0°,30'
FRACT. ± 1/32

TITLE							
PF50-0XX-028V-T PF50CX5-0004							
DWG NO	SCALE	SHEET	DATE				
PF50-28VDC-T	1:1	1 OF 1	06-07-11				
CODE IDENT NO.	DWG BY GP	CHK BY	QA LUV	MFG LD	R&D LUV		
8Z410	06-07-11		09-29-22	09-30-22	09-29-22		