




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-910133~136	2009/01/08	Vicky	Update the drawing
C	C210669	2021/04/27	Vicky	$\triangle C$ X8
D	C221869	2022/12/02	Vicky	$\triangle D$ X1

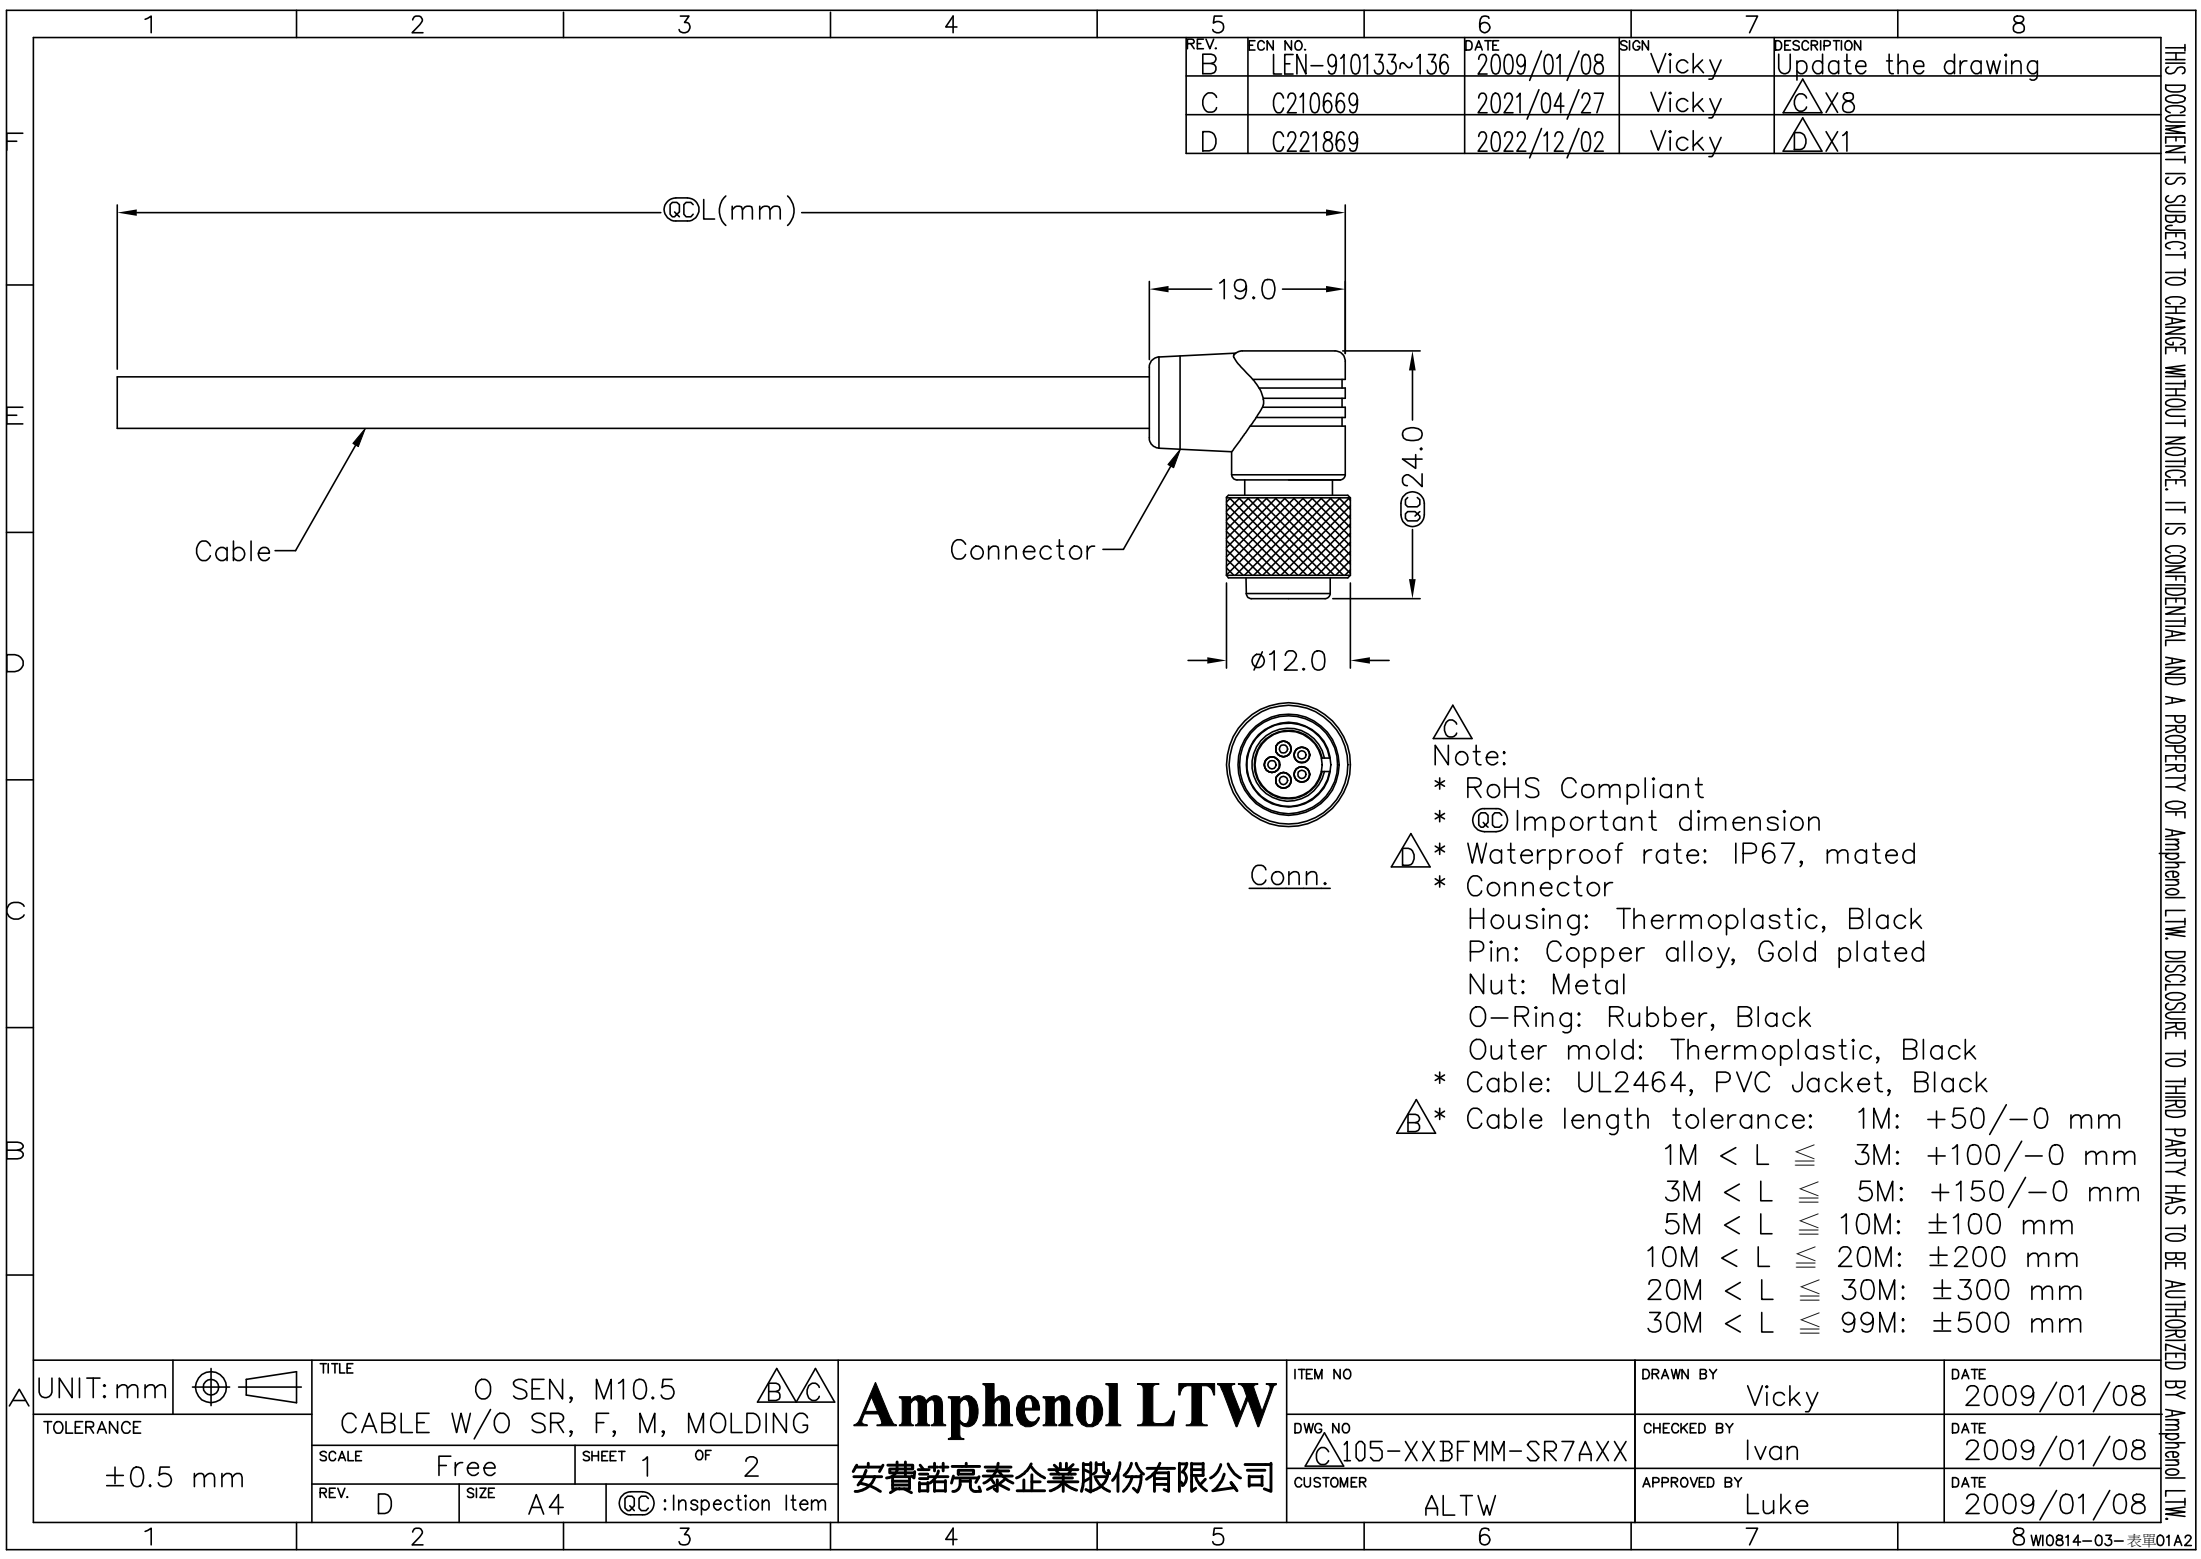

Note:

- * RoHS Compliant
- * @ Important dimension
- * Waterproof rate: IP67, mated
- * Connector
- Housing: Thermoplastic, Black
- Pin: Copper alloy, Gold plated
- Nut: Metal
- O-Ring: Rubber, Black
- Outer mold: Thermoplastic, Black
- * Cable: UL2464, PVC Jacket, Black



- * Cable length tolerance: 1M: +50/-0 mm
1M < L ≤ 3M: +100/-0 mm
3M < L ≤ 5M: +150/-0 mm
5M < L ≤ 10M: ±100 mm
10M < L ≤ 20M: ±200 mm
20M < L ≤ 30M: ±300 mm
30M < L ≤ 99M: ±500 mm

UNIT: mm	
TOLERANCE	±0.5 mm

TITLE		
O SEN, M10.5 $\triangle B \triangle C$		
CABLE W/O SR, F, M, MOLDING		
SCALE	Free	SHEET 1 OF 2
REV. D	SIZE A4	@ : Inspection Item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Vicky	DATE 2009/01/08
DWG. NO $\triangle C$ 105-XXBFMM-SR7AXX	CHECKED BY Ivan	DATE 2009/01/08
CUSTOMER ALTW	APPROVED BY Luke	DATE 2009/01/08

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---

XX: No. Of Pin—

•
•
•
•

Cable Length(L): 01~99Meters

C	
B	

△ Pin Assignments Front View

A