





REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LE3-910080	2009/01/16	Vicky	Update the drawing.


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

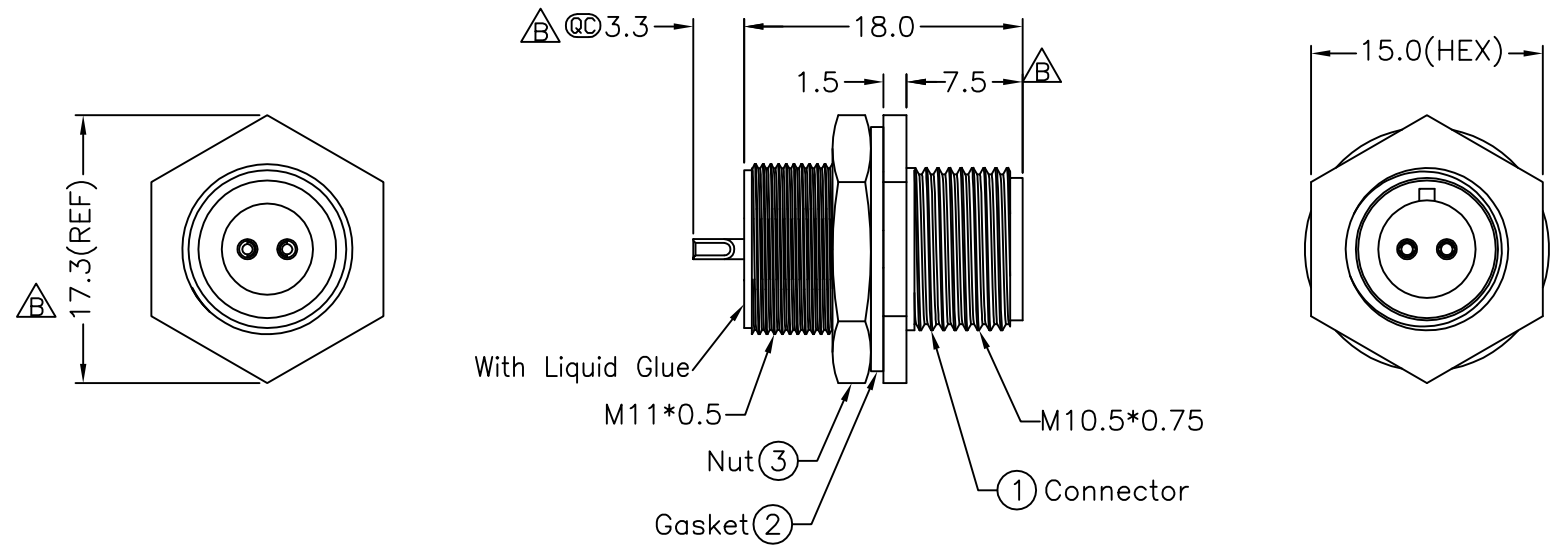

Pin Assignments
Front View

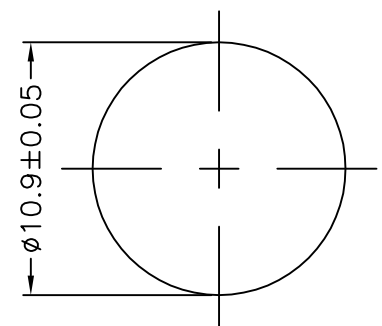

Recommended Panel Cut-Out



- Notes:
- * @@ Important Dimension.
 - * Waterproof Rate:IP67.
 - * Connector:Black,Nylon+GF.
 - * Female Pin:Copper Alloy,Gold Plated.
 - * Gasket:Black,EPDM.
 - * Nut:Copper Alloy,Nickel Plated.
 - * Shield:Copper Alloy,Nickel Plated.
 - * For Panel Thickness Max:6.0mm.
 - * Nut Torque:4~6 Kgf.cm

UNIT:mm		TITLE M10.5 Conn Panel Screw 2P M Conn F Pin		Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO 105-02PMFS-SH7001	DRAWN BY Vicky	DATE 2009/01/16
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°		SCALE Free	SHEET 1 OF 1			DWG NO 105-02PMFS-SH7001	CHECKED BY Ivan	DATE 2009/01/16
REV. B		SIZE A4	@@ :Inspection Item		CUSTOMER ALTW		APPROVED BY Luke	DATE 2009/01/16
1	2	3	4	5	6	7	8 FMWIO702-01-01A2	