



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

1	2	3	4	5	6	7	8
REV.	ECN NO.	DATE	SIGN	DESCRIPTION			

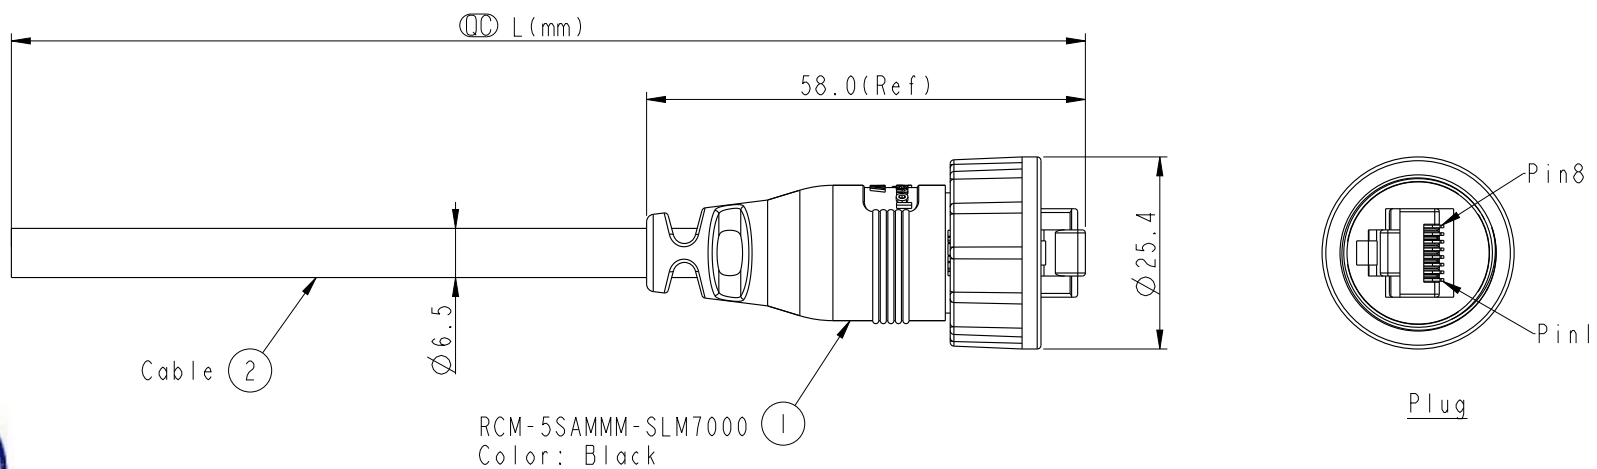

Pin Out		
Wire Color		Plug
Drain Wire	接地	Shield
Brown	棕	8
Brown/white	棕白	7
Green	綠	6
Blue/white	藍白	5
Blue	藍	4
Green/white	綠白	3
Orange	橙	2
Orange/white	橙白	1

Twist 對絞
Twist 對絞
Twist 對絞

RCM-5SAMMM-SLM7BXX
XX: 01~99Meter
01: 01Meter
02: 02Meters
:
99: 99Meters
Cable Length(L):01~99Meters
(B)CAT5E FTP

Note:
* $\varnothing$ Important Dimension
* Waterproof Rate:IP67.
* Plug:PC,Gold Plated,Shielded
* Screw Nut:ZN-ZDC-3
* Gasket:Silicone, Gray
* Cable: CAT5E FTP 24#*4P+D+AL/MY,
UV Resistant, OD=6.5mm, PVC Jacket, Black.
* Cable Length Tolerance: 01M:±40mm
02~05M:±60mm
06~10M:±100mm
11~30M:±200mm
30~99M:±500mm

UNIT:mm		TITLE RJ45,C SIZE CABLE SCREW 5E M CONN M PIN	
TOLERANCE ±0.5		SCALE 1:2	SIZE A4
REV. A	WC-REV. A.1	SHEET 1 OF 1	$\varnothing$ Inspection item

Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO	DRAWN BY Tom	DATE 2014-08-12
		DWG NO RCM-5SAMMM-SLM7BXX	CHECKED BY Jerry	DATE 2014-08-12
		CUSTOMER ALTW	APPROVED BY VICTOR	DATE 2014-08-12