
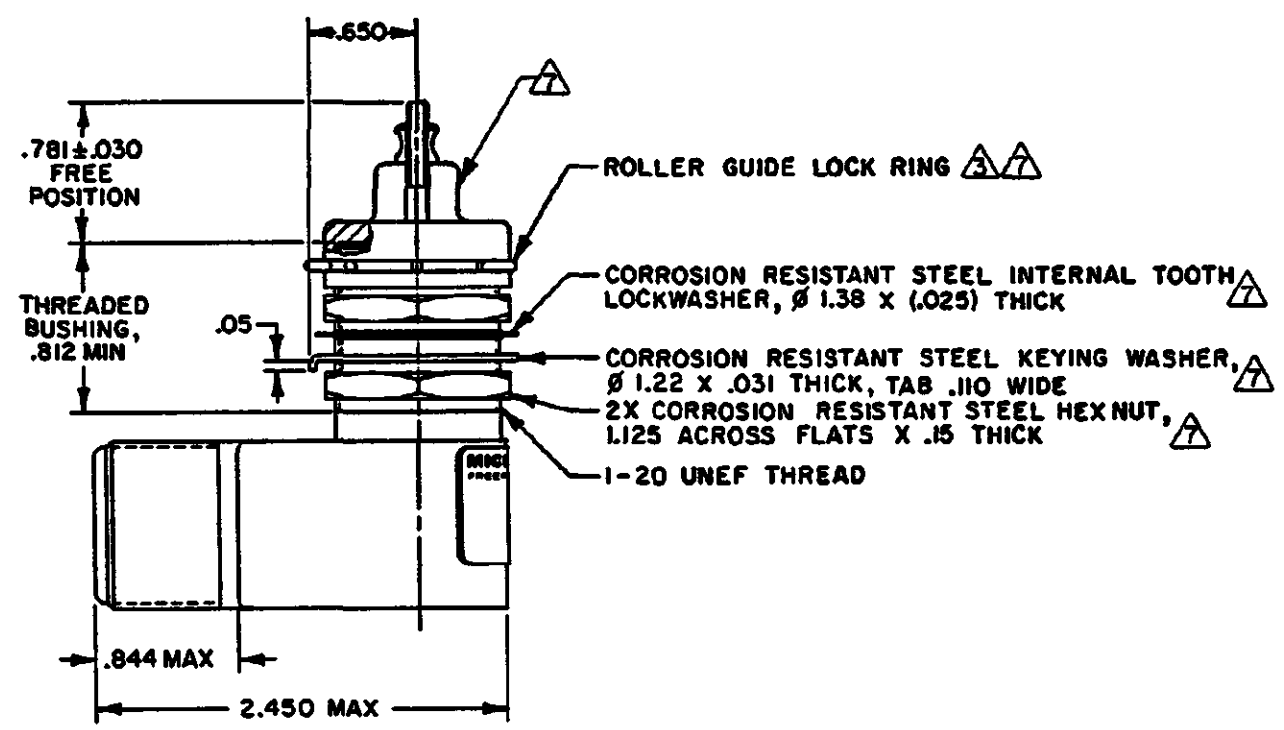
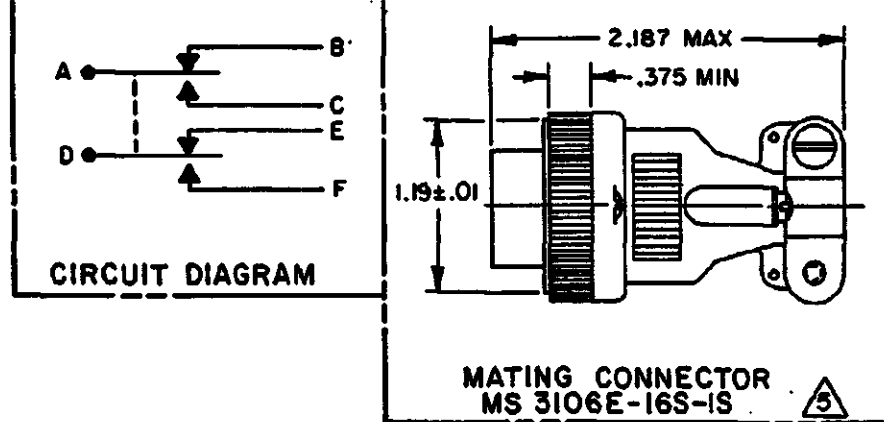


CATALOG LISTING
21EN76-R1
PAGE 1 OF 1
ISSUE 23
CMH
23MAR10
SR-9360
RELEASE NO.
CHECK
5 JUN 98
JAF
CHECK
5 JUN 98
DLT
DRAWN
RASTER

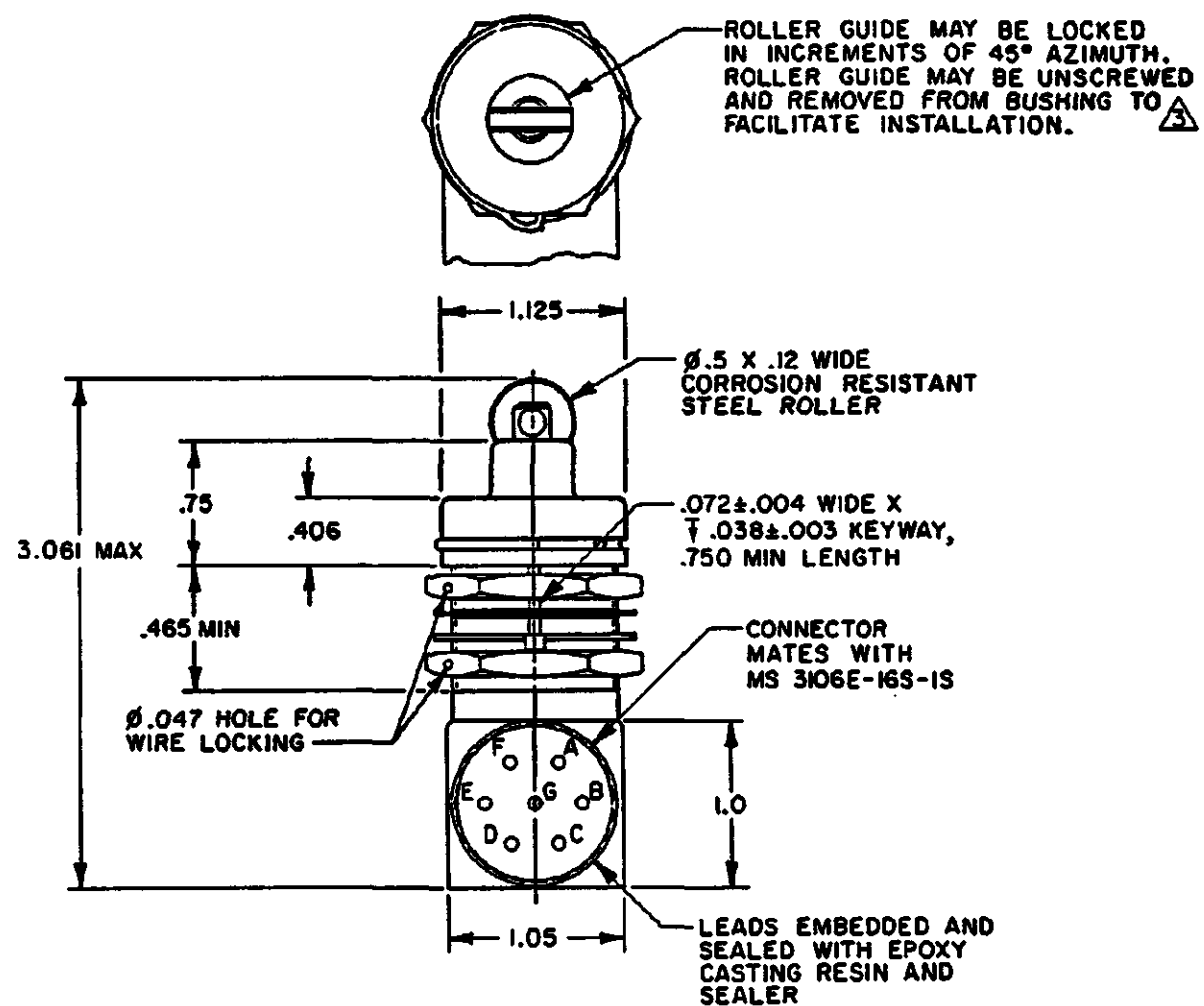

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH			THIRD ANGLE PROJECTION	
CHARACTERISTICS			SCALE FULL	
OPERATING FORCE-----6-12 LB			DO NOT SCALE PRINT	
FULL OVERTRAVEL FORCE-----30 LB MAX			UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE-----4 LB MIN			ONE PLACE (.0) ±.030	
PRETRAVEL-----.040 MAX			TWO PLACE (.00) ±.015	
DIFFERENTIAL TRAVEL-----.020 MAX			THREE PLACE (.000) ±.005	
OVERTRAVEL-----.250 MIN			ANGLES ±	
ELECTRICAL DATA ⚠			WEIGHT 8 OZ MAX	
CONTACT ARRANGEMENT 2X SPDT				
LOAD	28 VDC			
	SEA LEVEL	50,000 FT.		
RES	5			
IND	3			
MOTOR	4			
LAMP				

- NOTES**
- 1 - ENCLOSURE FINISHED WITH GREEN EPOXY BASED ENAMEL COLOR NO. 34151 PER FEDERAL STANDARD 595
 - 2 - SWITCH SEALED PER MIL-PRF-8805 SYMBOL 4
 - ⚠ TO ADJUST ROLLER DIRECTION REMOVE ROLLER GUIDE LOCK RING, SCREW ROLLER GUIDE DOWN AS FAR AS POSSIBLE, THEN UNSCREW TO DESIRED DIRECTION. SECURE BY REPLACING ROLLER GUIDE LOCK RING
 - 4 - CIRCUIT DIAGRAM AND CATALOG LISTING ARE SHOWN ON NAMEPLATE
 - ⚠ FURNISHED UNASSEMBLED WITH EACH UNIT
 - 6 - COINCIDENCE OF OPERATING AND RELEASING POINTS: .010 OF PLUNGER TRAVEL
 - ⚠ HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-PRF-8805
 - ⚠ UNDER LABORATORY TESTING, THIS CATALOG LISTING HAS DEMONSTRATED CAPABILITY IN CONTROLLING A 120VAC, 60HZ, 2A. INDUCTIVE LOAD FOR 25,000 CYCLES. TESTING WAS CONDUCTED PER MIL-PRF-8805 CONDITIONS AND LOADS PER PARAGRAPH 4.7.30.

ANSI Y14.5M-1982 APPLIES