


HONEYWELL
PART NUMBER
526-33AB47-202

REV	DOCUMENT	CHANGED BY	CHECK
B	0026692	CH 04DEC06	RK

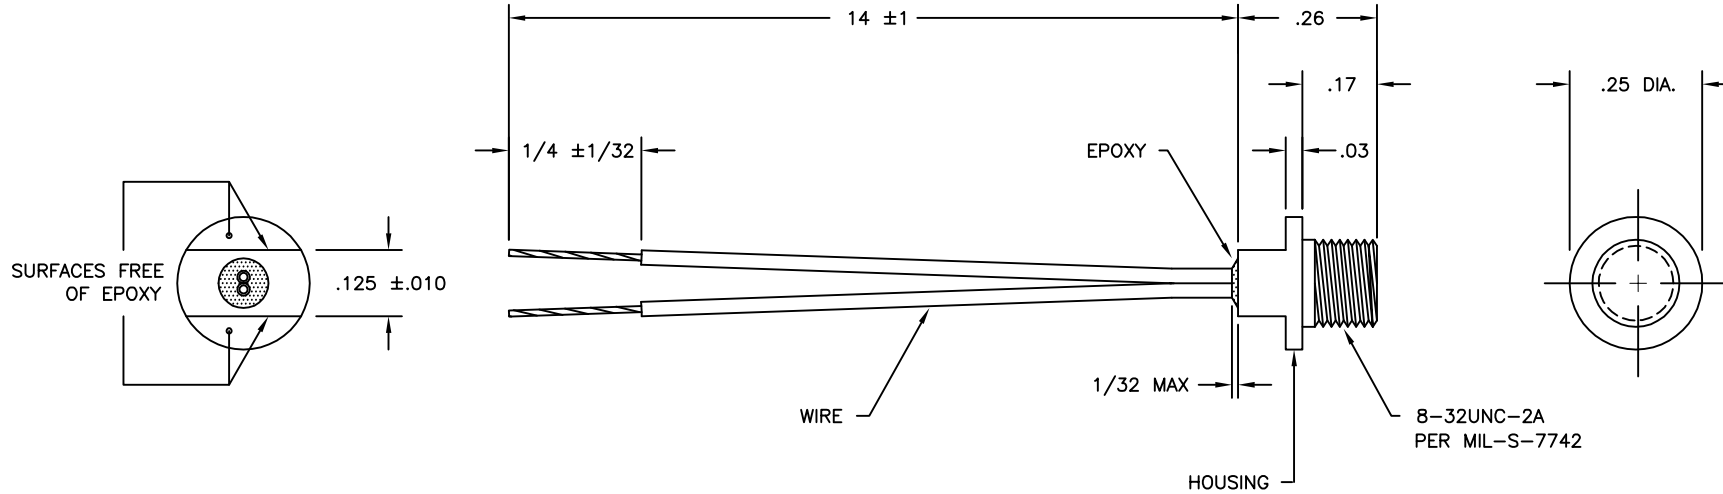

THERMISTOR	926-202VMV-B01
WIRE	24 AWG 7-32 STRANDED SILVER PLATED COPPER BLACK TEFLON INSULATION
HOUSING	316 OR 316L STAINLESS STEEL
MAXIMUM OPERATING TEMPERATURE	150°C
THERMISTOR CURVE	11
RESISTANCE	2000 OHMS AT 25°C
TOLERANCE	±0.5°C FROM 0 TO 125°C
DISSIPATION CONSTANT	5.2 mW/°C
TIME CONSTANT	2 SECONDS
RoHS COMPLIANT	

DESIGN UNITS:	INCH
TOLERANCES UNLESS NOTED:	
NO PLACE	X ±
ONE PLACE	.X ±
TWO PLACE	.XX ±
THREE PLACE	.XXX ±
FOUR PLACE	.XXXX ±
ANGLES	X ±
	0°30'
THIRD ANGLE PROJECTION	

DRAWN	CH	01AUG06
CHECK	RK	01AUG06
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
AUTOCAD		

Honeywell			
TITLE PROBE ASSEMBLY OUTLINE			
SIZE	TYPE	DRAWING NAME	REV
B	I	526-33AB47-202	B
SCALE	NTS	SHEET	1 OF 1