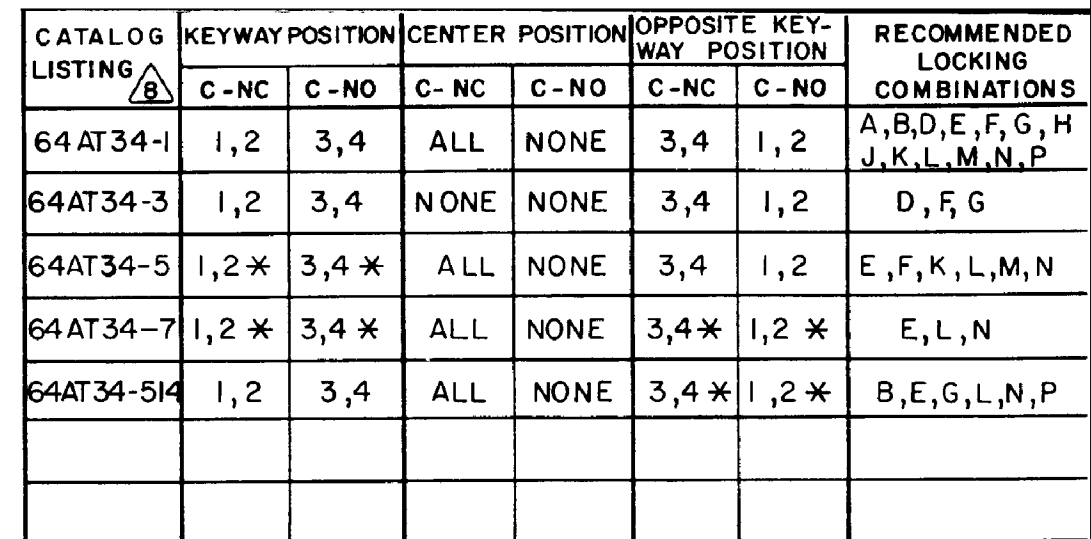


REV	DOCUMENT	CHANGED BY	CHECK
8	0018728	LKM 17FEB06	VA

[illegible]

- 1 - UNIT INCLUDES "23SX" TYPE (GOLD CONTACT) BASIC SWITCH (4)
(MEETS REQUIREMENTS OF MIL-PRF-8805)
- 2 - SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY
- 3 - PLATED TERMINALS WILL ACCEPT "AMP INC" .058 DIA PIN RECEPTACLES
- 4 SWITCH NUMBERS STAMPED ON END OF BASIC SWITCHES
- 5 TERMINAL DESIGNATION STAMPED ON BOTH SIDES OF UNIT
- 6 DULL FINISH ON LEVER AND BUSHING
- 7 FLAT WHITE RESILIENT SILICONE (50 DUROMETER APPROX)
- 8 SUFFIX LETTER MUST BE ADDED FOR DESIRED TYPE TOGGLE LOCKING (SEE
CHART FOR RECOMMENDED LOCKING COMBINATIONS
- 9 - FOR REPLACEMENT BUTTON SEE MICRO SWITCH CAT. LIST. 15PA90-6W
- 10 HARDWARE FURNISHED ASSEMBLED WITH SWITCH OR IN PACKET
15PA313-AT PER MIL-PRF-8805
- 11 - REPLACEMENT MOUNTING HARDWARE PACKET 15PA313-AT
- 12 FOR MANUFACTURING DETAIL SEE THE CORRESPONDING ASSEMBLY DRAWING
FOR EACH LISTING FOR FAA-PMA.

DESIGN UNITS: INCH				DRAWN	SLB	21JUN82	Honeywell				
TOLERANCES UNLESS NOTED:				CHECK	CEB	28JUN82					
NO PLACE	X	±	0.030 0.015 0.005	THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL.			TITLE ASSEMBLY - TOGGLE SWITCH				
ONE PLACE	.X	±		THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.							
TWO PLACE	.XX	±		INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE	TYPE	DRAWING NAME		REV
THREE PLACE	.XXX	±					C	I	64AT34 SERIES CHART 2		8
FOUR PLACE	.XXXX	±	THIRD ANGLE PROJECTION	RASTER			SCALE	FULL	WEIGHT .09 LB EST	SHEET 1 OF 1	
ANGLES	±	C					I	SCALE	FULL	WEIGHT .09 LB EST	SHEET 1 OF 1