




Home > Products > MICRO SWITCH™ Toggle Switches > NT > Product Page

### Order Product and Get Support

- U.S. Authorized Distributors
- Global Sales & Service
- N. American Sales Reps
- Distributor Inventory
- Technical Assistance
- White Papers
- Literature Request
- Test and Measurement Catalog
- RoHS Product List
- Customer Feedback

## 1NT887-7E

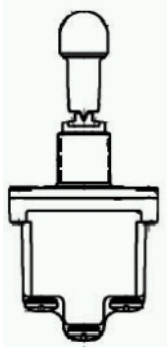

Actual product appearance may vary.

**NT Series Toggle Switch, 1 pole, 3 position, Screw terminal, Locking Lever**

### Features

Completely sealed switching chamber  
NEMA 3, 3R, 4, and 13  
UL recognized, File E12252, Vol. 1, Section 44  
CSA certified, File LR4442  
CE approved

### Potential Applications

Aerial lifts, scissor lifts, truck mounted tele-handlers, and cranes  
Construction equipment  
Agriculture equipment  
Material-handling equipment  
Factory-floor control units  
Machine tool equipment manufacturers

### Description

MICRO SWITCH™ NT Series toggle switches meet the need for a rugged, cost effective toggle switch. Quality construction features include a seal between the toggle lever and bushing, and between the cover and case. These switches can be used where panels are subject to splashes, hosedowns, or outdoor environments. The "Easy-Start" threaded bushing enables quick alignment of mounting nut to decrease the chance of cross threading. The panel stand-off with O-ring feature available on some listings, eliminates the need for behind-the-panel hardware, provides uniform panel height, and provides a panel to cover seal.

### Supporting Documentation

[Accessory: Seals](#)

[Accessory: Nuts](#)

[Engineering Drawing](#)

Product Specifications													
Circuitry/Operating action	<table border="0"> <tr> <td style="text-align: center;"><b>Keyway Momentary Position</b></td> <td style="text-align: center;"><b>Center Position</b></td> <td style="text-align: center;"><b>Opposite Keyway Momentary Position</b></td> </tr> <tr> <td style="text-align: center;"></td> <td style="text-align: center;"></td> <td style="text-align: center;"></td> </tr> <tr> <td style="text-align: center;">1   2   3</td> <td style="text-align: center;">1   2   3</td> <td style="text-align: center;">1   2   3</td> </tr> <tr> <td style="text-align: center;">ON</td> <td style="text-align: center;">OFF</td> <td style="text-align: center;">ON</td> </tr> </table>	<b>Keyway Momentary Position</b>	<b>Center Position</b>	<b>Opposite Keyway Momentary Position</b>				1   2   3	1   2   3	1   2   3	ON	OFF	ON
<b>Keyway Momentary Position</b>	<b>Center Position</b>	<b>Opposite Keyway Momentary Position</b>											
1   2   3	1   2   3	1   2   3											
ON	OFF	ON											
Product Type	MICRO SWITCH™ Toggle Switch												
Lever Lock	 Locked in center position												
Ampere/Voltage Range (Resistive Load)	0.75 A at 115 Vdc, 0.5 A at 250 Vdc, 0.5 A to 10 A at 0.5 Vac to 7 Vac, 0.5 A to 15 A at 0.5 Vdc to 28 Vdc												
Circuitry	SPDT												
Action	3 position												
Mounting	Bushing 15/32 in												
Termination	Screw												
Lever Type	Locking												
UL/CSA Rating Code	L191: 15 A - 125, 250, 277 Vac; 1/2 Hp - 125 Vac; 1 Hp - 250, 277 Vac; 5 A - 120 Vac "L"												
Comment	Gold Plated Contacts												
Availability	Global												
UNSPSC Code	30211908												
UNSPSC Commodity	30211908 Toggle switches												
Series Name	NT												

### My Links

[Login to iCOM](#)  
[Login as Rep/AD](#)  
[Login as Guest](#)  
[Login to Digital University](#)

### Keyword Search

Search for product and support information.

All Sensing and Control

### Product Search

Part number search:

Use (\*) to expand search

[Specification Search](#)