




Features

- Compact size, resin case.
- Improved safety and suppressing self heating.



Applications

- Switching power supply, Inverter and Servo power.

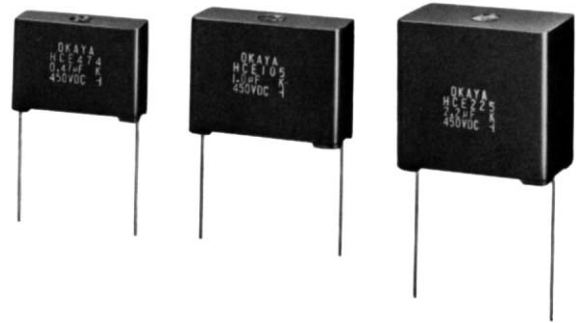

Dimensions

Circuit

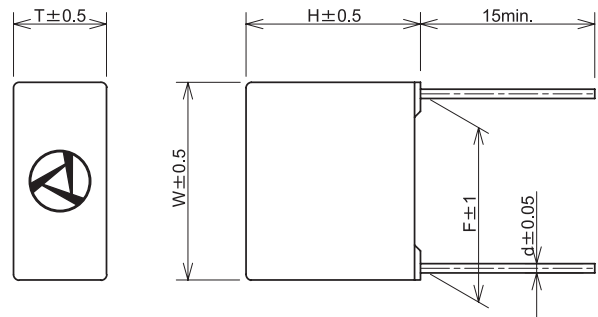

Unit: mm

Electrical Specifications

Operating Temperature: -40 ~ +105°C

Rated Voltage Capacitance		4 5 0 V					6 3 0 V					Dissipation factor	Test voltage	Insulation resistance
PART NO.	μ F	W	T	H	F	d	W	T	H	F	d			
104	0.1					0.8	17.0	8.0	15.0	15.0	0.8	0.01max (at 1000± 100Hz)	Rated Voltage × 1.75 (2~5sec)	15000MΩ min.
154	0.15						25.0	6.5	16.0	22.5				
224	0.22	17.0	8.0	15.0	15.0		25.0	8.0	17.5	22.5				
334	0.33	25.0	6.5	16.0	22.5		25.0	10.0	19.5	22.5				
474	0.47	25.0	8.0	17.5	22.5		30.0	11.0	22.0	27.5				
684	0.68	25.0	10.0	19.5	22.5		30.0	13.5	24.5	27.5				
105	1.0	30.0	11.0	22.0	27.5		30.5	16.0	28.0	27.5	1.0			5000Ω F min. (at 20℃ 100V _{DC})
155	1.5	30.0	13.5	24.5	27.5		41.0	15.5	28.0	37.5				
225	2.2	30.5	16.0	28.0	27.5		41.0	17.5	32.5	37.5				

Model Numbering System

