

## Contact insert - HC-A16-I-PT-M-32 - 1585391


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Contact insert, Size: D25, Number of positions: 16+PE, Pin, Push-in connection, 250 V, 20 A, 0.14 mm<sup>2</sup> ... 2.5 mm<sup>2</sup>



### Key Commercial Data

Packing unit	1
GTIN	 4 046356 285124
GTIN	4046356285124
Custom tariff number	85369010

### Technical data

#### General

Note	For HC-D25 / HC-D 50 housing
Connection method	Push-in connection
Screwdriver blade	0.5 x 3.5 mm
Degree of pollution	3
Overvoltage category	III
Number of positions	16+PE
Insertion/withdrawal cycles	≥ 500
Size	D25
Conductor cross section	0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> (Applies to stranded conductors with ferrules)
Connection cross section AWG	26 ... 14
Stripping length of the individual wire	8 mm
Assembly instructions	Connectors may be operated only when there is no load/voltage.

#### Ambient conditions

# Contact insert - HC-A16-I-PT-M-32 - 1585391

## Technical data

### Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C (including heating up of contacts)
---------------------------------	--

### Material data

Contact material	Copper alloy
Contact surface material	Ag
Contact carrier material	PC

### Electrical characteristics


Rated voltage (III/3)	250 V
Rated surge voltage	4 kV
	4 kV
Rated current	20 A

### Standards and Regulations

Flammability rating according to UL 94	V0
--	----

## Drawings

Dimensional drawing

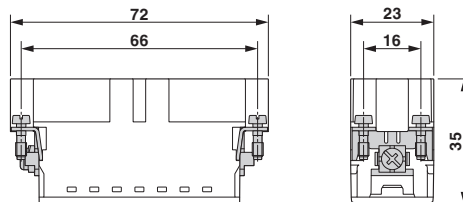

Male insert

## Approvals

Approvals

Approvals

GL / EAC / CSA / UL Recognized

Ex Approvals


Approval details


# Contact insert - HC-A16-I-PT-M-32 - 1585391

## Approvals

GL		<a href="http://exchange.dnv.com/tari/">http://exchange.dnv.com/tari/</a>	6196614 HH
----	---	---	------------

EAC			EAC-Zulassung
-----	---	--	---------------

CSA		<a href="http://www.csagroup.org/services/testing-and-certification/certified-product-listing/">http://www.csagroup.org/services/testing-and-certification/certified-product-listing/</a>	13631
mm <sup>2</sup> /AWG/kcmil	14		
Nominal current I <sub>N</sub>	13 A		
Nominal voltage U <sub>N</sub>	600 V		

UL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	E118976
mm <sup>2</sup> /AWG/kcmil	14		
Nominal current I <sub>N</sub>	16 A		
Nominal voltage U <sub>N</sub>	600 V		