

Control cabinet feed-through - VS-BH-M12FSD-RJ45/180 - 1657494

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Control cabinet feed-through, M12, 4-pos., D-coded on RJ45 socket, socket input 180°, IP65/67



Key Commercial Data

Packing unit	1 STK
Weight per Piece (excluding packing)	36.000 g
Custom tariff number	85366990
Country of origin	Germany

Technical data

Mechanical characteristics

Number of positions	4
Shielded	yes
Insertion/withdrawal cycles	≥ 100
Color	black
Mounting type	Rear mounting
Degree of protection	IP65/IP67
Design	Straight

Ambient conditions

Ambient temperature (operation)	-25 °C ... 85 °C
Degree of protection	IP65
	IP67

Material data

Flammability rating according to UL 94	V0
Housing material	PA

Control cabinet feed-through - VS-BH-M12FSD-RJ45/180 - 1657494

Technical data

Material data

Contact material	Copper alloy
------------------	--------------

Electrical characteristics

Number of positions	4
Nominal voltage U_N	50 V
Nominal current I_N	1 A
Transmission characteristics (category)	CAT5 (IEC 11801:2002)
GRP transmission properties	CAT5 (IEC 11801:2002)
Rated current	1.75 A

Standards and Regulations


Flammability rating according to UL 94	V0
--	----

Drawings

Explosion drawing

Dimensional drawing



Exploded drawing



Panel cutout

Dimensional drawing

Circuit diagram

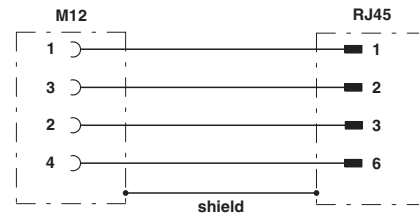

Panel cutout

Circuit diagram