

Contact insert module - HC-M-03-MOD-ST - 1663213


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



HEAVYCON contact insert module, male, 3-pos., crimp connection



Key Commercial Data

| | |
|--------------------------------------|---|
| Packing unit | 1 pc |
| Minimum order quantity | 2 pc |
| GTIN |  4 017918 123024 |
| Weight per Piece (excluding packing) | 14.4 g |
| Custom tariff number | 85366990 |
| Country of origin | Germany |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27140816 |
| eCl@ss 4.1 | 27140816 |
| eCl@ss 5.0 | 27143424 |
| eCl@ss 5.1 | 27143424 |
| eCl@ss 6.0 | 27143424 |
| eCl@ss 7.0 | 27440209 |
| eCl@ss 8.0 | 27440207 |

ETIM

| | |
|----------|----------|
| ETIM 2.0 | EC000438 |
| ETIM 3.0 | EC000438 |
| ETIM 4.0 | EC000438 |
| ETIM 5.0 | EC000438 |

Contact insert module - HC-M-03-MOD-ST - 1663213

Classifications

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211923 |
| UNSPSC 7.0901 | 39121522 |
| UNSPSC 11 | 39121522 |
| UNSPSC 12.01 | 39121522 |
| UNSPSC 13.2 | 39121522 |

Approvals

Approvals


Approvals


CSA / UL Recognized / EAC

Ex Approvals

Approvals submitted

Approval details

| | |
|---|-------|
| CSA  | |
| mm ² /AWG/kcmil | 16-10 |
| Nominal current I _N | 32 A |
| Nominal voltage U _N | 600 V |

| | |
|---|-------|
| UL Recognized  | |
| mm ² /AWG/kcmil | 8 |
| Nominal current I _N | 40 A |
| Nominal voltage U _N | 600 V |


Contact insert module - HC-M-03-MOD-ST - 1663213

Approvals

EAC


Drawings

Dimensional drawing

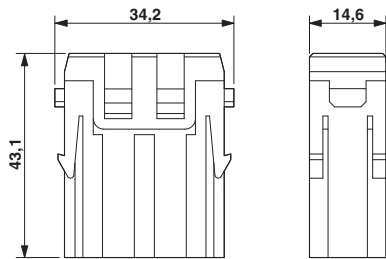

Male insert

Diagram

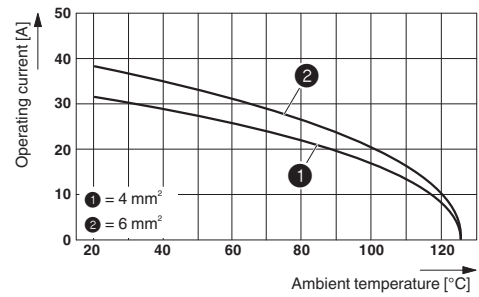

Derating diagram (6 modules in HC-B 24 housing)