

Contact insert - HC-D 40-EBUC - 1772492

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



HEAVYCON female insert, D40 series, 40-pos., crimp connection



Key Commercial Data

Packing unit	1 STK
GTIN	 4 017918 037161
GTIN	4017918037161
Weight per Piece (excluding packing)	80.780 g
Custom tariff number	85366990
Country of origin	Germany

Technical data

General

Note	For HC-D40 housing, crimp contacts CK1,6-ED (crimp contacts not included in scope of supply)
Connection method	Crimp connection
Degree of pollution	3
Overvoltage category	III
Constructional and testing regulations	DIN VDE 0627/86
	DIN VDE 0110/02.79
	DIN VDE 0110-1/04.97
	IEC 60664-1, DIN IEC 60512
	IEC 60352
Number of positions	40+PE

Contact insert - HC-D 40-EBUC - 1772492

Technical data

General

Insertion/withdrawal cycles	≥ 500
Size	B16
Connection in acc. with standard	IEC / EN
Conductor cross section	0.14 mm ² ... 2.5 mm ²
Connection cross section AWG	26 ... 14
Stripping length of the individual wire	8 mm
	6 mm (2.5 mm ²)
Assembly instructions	- Use of HC-CST (1676857) coding pins and HC-CBU (1676860) coding sockets has been prescribed.
Connection	Connectors may be plugged in only when there is no load/voltage.

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C (including heating up of contacts)
---------------------------------	--

Material data

Flammability rating according to UL 94	V0
Contact material	Copper alloy
Contact surface material	Ag (alternatively Au)
Contact carrier material	PA

Electrical characteristics

Rated voltage (III/3)	250 V
Rated surge voltage	4 kV
Rated current	10 A

Standards and Regulations

Connection in acc. with standard	IEC / EN
	CSA
Constructional and testing regulations	DIN VDE 0627/86
	DIN VDE 0110/02.79
	DIN VDE 0110-1/04.97
	IEC 60664-1, DIN IEC 60512
	IEC 60352
Flammability rating according to UL 94	V0


Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings


Contact insert - HC-D 40-EBUC - 1772492

Schematic diagram




Connector pin assignment, connection side

Diagram

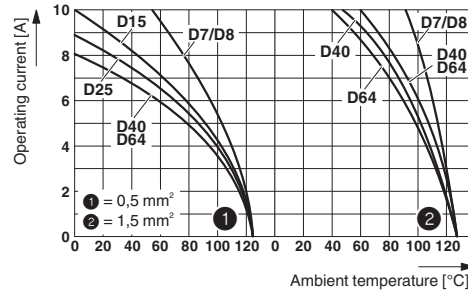


Derating diagram: HC-D...C series

Dimensional drawing

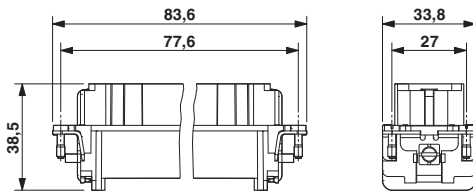

Female insert (turned contacts)

Dimensional drawing

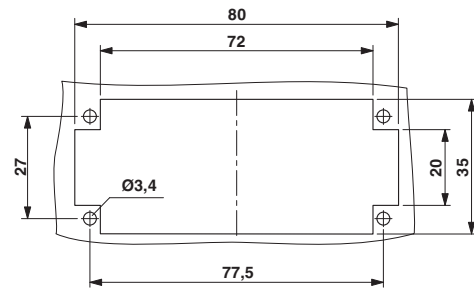

Panel cutout

Approvals

Approvals

Approvals


CSA / UL Recognized / EAC / EAC


Ex Approvals

Approval details

Contact insert - HC-D 40-EBUC - 1772492

Approvals

CSA  http://www.csagroup.org/services/testing-and-certification/certified-product-listing/212533	
mm ² /AWG/kcmil	22-16
Nominal current I _N	10 A
Nominal voltage U _N	300 V

UL Recognized  http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm FILE E 118976	
mm ² /AWG/kcmil	22-16
Nominal current I _N	10 A
Nominal voltage U _N	600 V

EAC EAC-Zulassung

EAC 7500651.22.01.00246