

1340151
<https://www.phoenixcontact.com/nl/products/1340151>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Coaxial PCB connector, degree of protection: IP20, number of positions: 1, 12 Gbps, material: Metal, connection method: Solder connection, cable outlet: straight, for additional information, see the product range drawing in the Download Center

Your advantages

- Complete documentation saves developers time during design-in
- Ideal for WLAN, Bluetooth, LTE, and 5G signals
- The reflow capability of PCB connectors enables efficient and cost-optimized processing

Commercial data

Item number	1340151
Packing unit	100 pc
Minimum order quantity	100 pc
Sales key	ABNFBA
Product key	ABNFBA
GTIN	4063151646608
Weight per piece (including packing)	6,85 g
Weight per piece (excluding packing)	3,82 g
Customs tariff number	85366910
Country of origin	DE

CUC-COX-J1M-A/KFS - Coaxial PCB connector



1340151

<https://www.phoenixcontact.com/nl/products/1340151>

Technical data

Product properties

Type	Coaxial
Number of positions	1
Connection profile	R-SMA (f)
Type of packaging	Tape and Reel
Cable outlet	straight
Thread type	1/4-36 UNS

Electrical properties

Rated surge voltage (III/2)	1500 V
Frequency range	10 Hz
Test voltage	1000 V _{rms}
Transmission medium	Copper
Transmission speed	12.4 Gbps

Output data

Transmission frequency	1.00 GHz
------------------------	----------

Connection data

Connection technology

Connection method	Solder connection
Locking mechanism tightening torque	1.10 Nm

Dimensions

Width	6.5 mm
Height	11.6 mm
Length	14.2 mm
Installed height	9.60 mm
Orientation to PCB	90.00 °

Material specifications

Flammability rating according to UL 94	V0
Housing material	Metal
Contact material	CuBe2
Contact surface material	NiP-Au

Cable/line

Halogen-free	no
--------------	----

Mechanical properties

Mechanical data

CUC-COX-J1M-A/KFS - Coaxial PCB connector



1340151

<https://www.phoenixcontact.com/nl/products/1340151>

Insertion/withdrawal cycles	> 100
Extraction force per signal contact	< 20 N
Locking mechanism tightening torque	1.10 Nm

Environmental and real-life conditions

Test specification

Specification	DIN EN 61169-1
Contact resistance R_2	2.00 mΩ
Insulation resistance, neighboring contacts	5 GΩ
Impulse withstand voltage at sea level	1400.00 V DC
Power-frequency withstand voltage	1000.00 V AC

Test specification

Specification	DIN EN 60068-2-14 Test Na
Cold stress	-10°C

Test specification

Specification	DIN EN 60068-2-6 Test Fc
Frequency	10-2000-10 Hz
Sweep speed	1 octave/min
Amplitude	0.75 mm
Acceleration	100.00 m/s ²
Test duration	2.50 h


Mounting

Processing notes

Process	THR
Moisture Sensitive Level	MSL 1

Drawings

Diagram

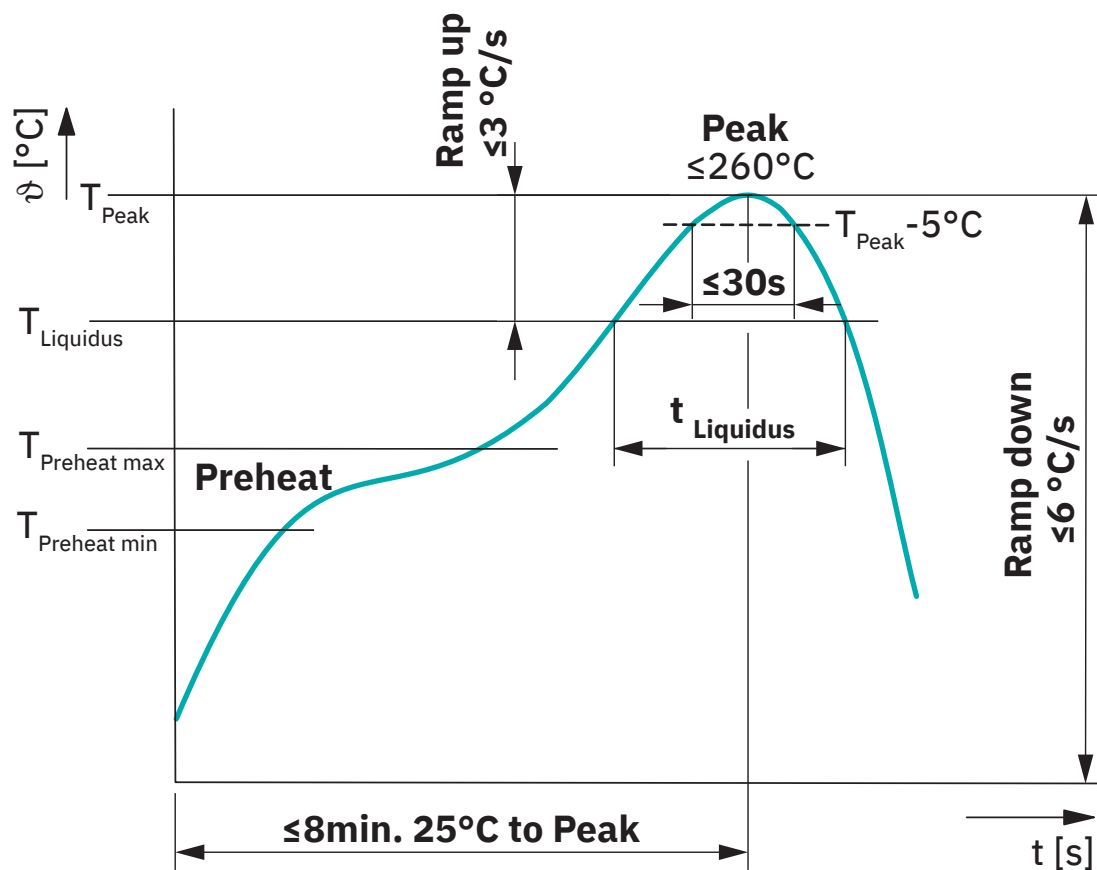

Classification reflow soldering profile

CUC-COX-J1M-A/KFS - Coaxial PCB connector



1340151

<https://www.phoenixcontact.com/nl/products/1340151>

Classifications

ECLASS

ECLASS-13.0	27460201
ECLASS-15.0	27460201

ETIM

ETIM 10.0	EC002637
-----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

CUC-COX-J1M-A/KFS - Coaxial PCB connector



1340151

<https://www.phoenixcontact.com/nl/products/1340151>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT B.V.
Hengelder 56 6902 PA Zevenaar
Postbus 246 6900 AE Zevenaar
(0316) 59 17 20
sales@phoenixcontact.nl