

# CUC-V06-C1PGY-S/R4CE8:1 - RJ45 connector



1414383

<https://www.phoenixcontact.com/nl/products/1414383>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



RJ45 connector, design: RJ45, degree of protection: IP67, number of positions: 8, 1 Gbps, CAT6, material: Plastic, connection method: Crimp connection, connection cross section: AWG 27- 24, cable outlet: straight, color: gray, Ethernet/PROFINET

## Commercial data

|                                      |               |
|--------------------------------------|---------------|
| Item number                          | 1414383       |
| Packing unit                         | 1 pc          |
| Minimum order quantity               | 1 pc          |
| Sales key                            | ABNNAB        |
| Product key                          | ABNNAB        |
| GTIN                                 | 4055626025346 |
| Weight per piece (including packing) | 19,5 g        |
| Weight per piece (excluding packing) | 17,27 g       |
| Customs tariff number                | 85366990      |
| Country of origin                    | DE            |

# CUC-V06-C1PGY-S/R4CE8:1 - RJ45 connector



1414383

<https://www.phoenixcontact.com/nl/products/1414383>

## Technical data

### Product properties

|                      |                   |
|----------------------|-------------------|
| Type                 | RJ45              |
| Sensor type          | Ethernet/PROFINET |
| Number of positions  | 8                 |
| Connection profile   | RJ45              |
| No. of cable outlets | 1                 |
| Shielded             | no                |
| Cable outlet         | straight          |

### Insulation characteristics

|                      |   |
|----------------------|---|
| Overvoltage category | I |
| Degree of pollution  | 2 |

### Electrical properties

|                                         |                  |
|-----------------------------------------|------------------|
| Rated voltage (III/3)                   | 72 V (DC)        |
| Rated current                           | 1 A              |
| Frequency range                         | to 250 MHz       |
| Nominal voltage $U_N$                   | 72 V (DC)        |
| Nominal current $I_N$                   | 1.75 A           |
| Transmission medium                     | Copper           |
| Transmission speed                      | 1 Gbps (250 MHz) |
| Transmission characteristics (category) | CAT6             |
| Transmission speed                      | 1 Gbps           |

### Connection data

#### Connection technology

|                              |                                                        |
|------------------------------|--------------------------------------------------------|
| Connection method            | Crimp connection                                       |
| Connection cross section AWG | 27 ... 24 (flexible)                                   |
| Conductor cross-section      | 0.1 mm <sup>2</sup> ... 0.2 mm <sup>2</sup> (flexible) |

### Dimensions

|        |         |
|--------|---------|
| Width  | 38.4 mm |
| Height | 19.9 mm |
| Length | 53 mm   |

### Material specifications

|                                        |                 |
|----------------------------------------|-----------------|
| Color                                  | gray            |
| Flammability rating according to UL 94 | V0              |
| Seal material cable seal               | TPE             |
| Housing material                       | Plastic         |
| Cable seal material                    | NBR             |
| Contact material                       | Phosphor bronze |

# CUC-V06-C1PGY-S/R4CE8:1 - RJ45 connector



1414383

<https://www.phoenixcontact.com/nl/products/1414383>

|                          |      |
|--------------------------|------|
| Contact surface material | Gold |
| Contact carrier material | PC   |
| O-ring material          | FPM  |

## Cable/line

|                         |                     |
|-------------------------|---------------------|
| External cable diameter | 5 mm ... 8.5 mm     |
| Cable cross section     | 0.1 mm <sup>2</sup> |

## Mechanical properties

### Mechanical data

|                             |       |
|-----------------------------|-------|
| Insertion/withdrawal cycles | ≥ 750 |
|-----------------------------|-------|

# CUC-V06-C1PGY-S/R4CE8:1 - RJ45 connector




1414383

<https://www.phoenixcontact.com/nl/products/1414383>

## Drawings

Dimensional drawing

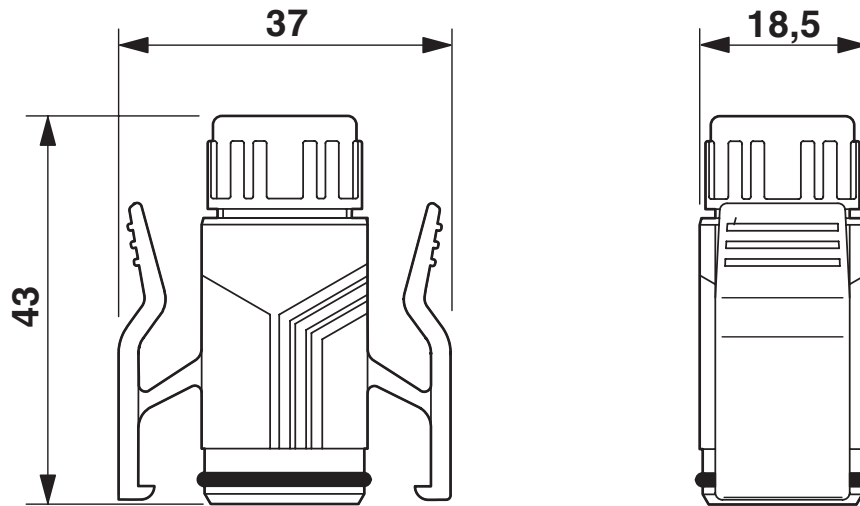

RJ45 sleeve housing IP67

# CUC-V06-C1PGY-S/R4CE8:1 - RJ45 connector



1414383

<https://www.phoenixcontact.com/nl/products/1414383>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-13.0 | 27440390 |
| ECLASS-15.0 | 27440114 |

### ETIM

|           |          |
|-----------|----------|
| ETIM 10.0 | EC004746 |
|-----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

# CUC-V06-C1PGY-S/R4CE8:1 - RJ45 connector



1414383

<https://www.phoenixcontact.com/nl/products/1414383>

## Environmental product compliance

### EU RoHS

|                                         |                    |
|-----------------------------------------|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|-----------------------------------------|--------------------|

### China RoHS

|                                        |                                          |
|----------------------------------------|------------------------------------------|
| Environment friendly use period (EFUP) | EFUP-E                                   |
|                                        | No hazardous substances above the limits |

### EU REACH SVHC

|                                     |                                                             |
|-------------------------------------|-------------------------------------------------------------|
| REACH candidate substance (CAS No.) | 6,6'-di-tert-butyl-2,2'-methylenedi-p-cresol(CAS: 119-47-1) |
| SCIP                                | 2204a4ca-78a0-44aa-a30d-de720a2b8ca3                        |

Phoenix Contact 2026 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT B.V.  
Hengelder 56 6902 PA Zevenaar  
Postbus 246 6900 AE Zevenaar  
(0316) 59 17 20  
[sales@phoenixcontact.nl](mailto:sales@phoenixcontact.nl)