


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

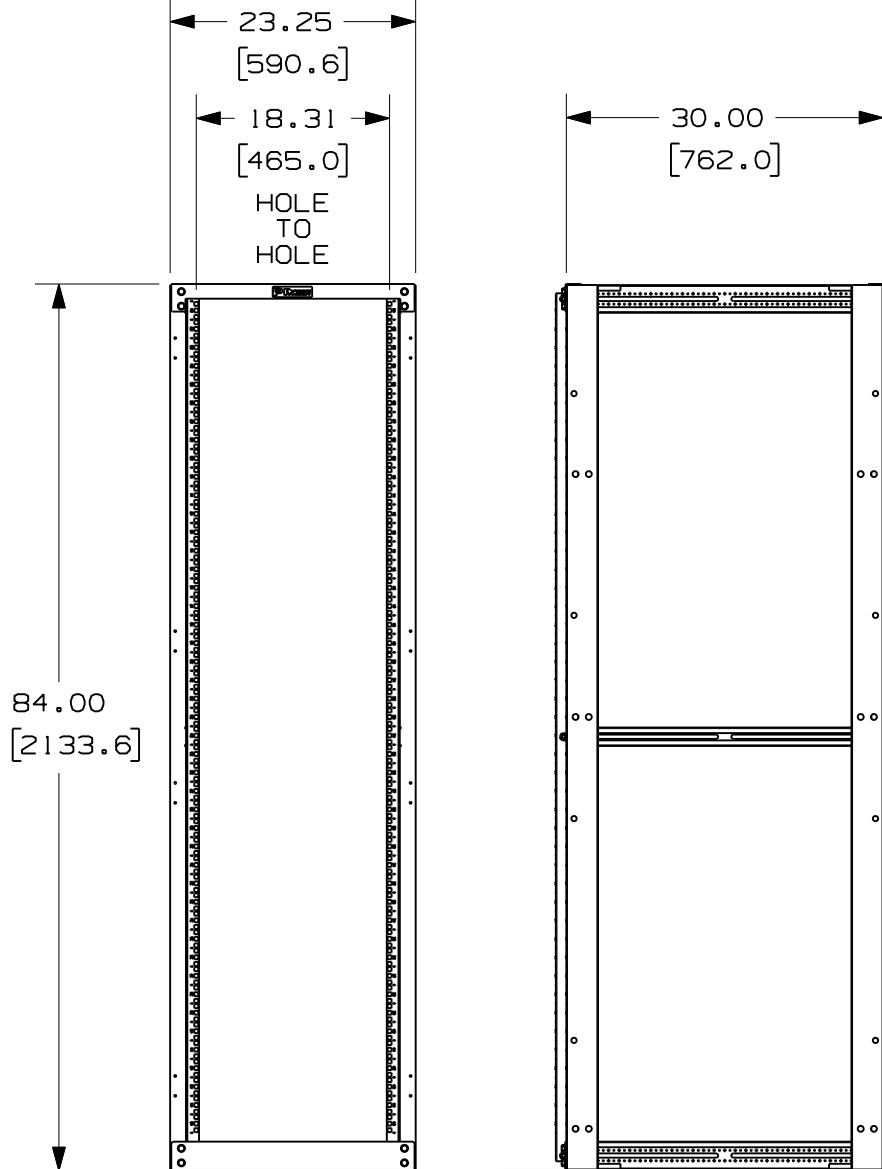

PANDUIT P/N	WEIGHT
CMR4P84CN	101 LBS/EACH 45.9 Kg/EACH


NOTES:

- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A LIST OF CURRENT PARTS APPLICABLE FOR USE WITH THIS PRODUCT.
- DIMENSIONS IN PARENTHESIS ARE METRIC.
- INDEPENDENT ADJUSTABLE FRONT & REAR MOUNTING RAILS (EIA) ADJUST FROM 4" TO 30" DEPTH.
- CAN BE USED WITH ANY EIA STANDARD COMPONENT IN ADDITION TO ALL PANDUIT HORIZONTAL CABLE MANAGEMENT AND PATCH PANEL PRODUCTS.
- 45 AVAILABLE RACK SPACES.
- EIA UNIVERSAL STANDARD HOLE PROGRESSION ON FRONT CHANNELS AND REAR MOUNT RAILS .625", .625", .500", .625", .625", .500"...ETC.
- ALL ASSEMBLY HARDWARE INCLUDED:
 - (12) 3/8-16 X 1" BLACK HEX HEAD CAP SCREWS
 - (24) 3/8" PAINT PIERCING GROUNDING WASHERS
 - (1) TUBE OF ANTI-OXIDIZING PASTE
 - (12) 3/8-16 BLACK HEX NUT
 - (24) 12-24 X .5" SLOTTED PAN HEAD STEEL SCREWS
 - (25) CAGE NUTS #12-24
- RU SPACING NUMBERS ARE CLEARLY PRINTED ON MOUNTING RAILS.
- EASY ASSEMBLY, ONE WRENCH NEEDED TO INSTALL BOLTS INTO WELDNUTS IN ALL 8 CORNERS.
- FULLY BONDED STRUCTURE WHEN ASSEMBLED PER INSTRUCTIONS.
- LOAD RATING - 2000 LBS.


MODEL FILENAME		V10312AA/05
CAD FILENAME/LAYERS		V10312AA_DC/05A
PANDUIT CORP. TINLEY PARK, ILLINOIS		
4 POST RACK (CMR4P84CN) CUSTOMER DRAWING		
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ± (.XXX) ± (.XX) ± ANGLES ±		UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.
DRAWN BY LEE	MAT'L: STEEL	SCALE NONE
DATE 2-21-06		DRAWING NO. 10312-16 SHEET 1 OF 3
CHK'D BRAP		DWG A SIZE

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
05A	11-11-08	BAME	SPM	CHANGED NUMBERING ORIENTATION UPDATED HARDWARE NOTE REVISED PART WEIGHT UPDATED REVISION BLOCK	10312-16				
04	12-17-07	TMW	TBW	UPDATED NOTES & DIMENSIONS	10312-16		KRKE		

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

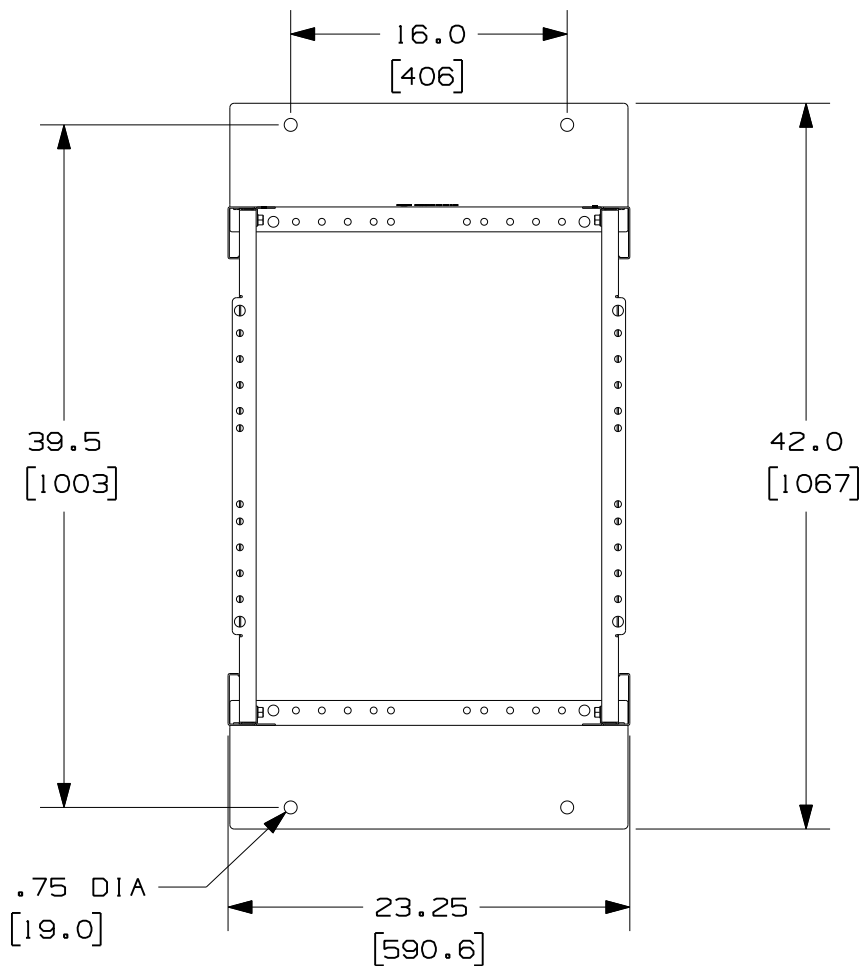

FLOOR FOOTPRINT WITH
BASE ANGLES TURNED
OUTWARD FOR EXTENDED
FOOTPRINT

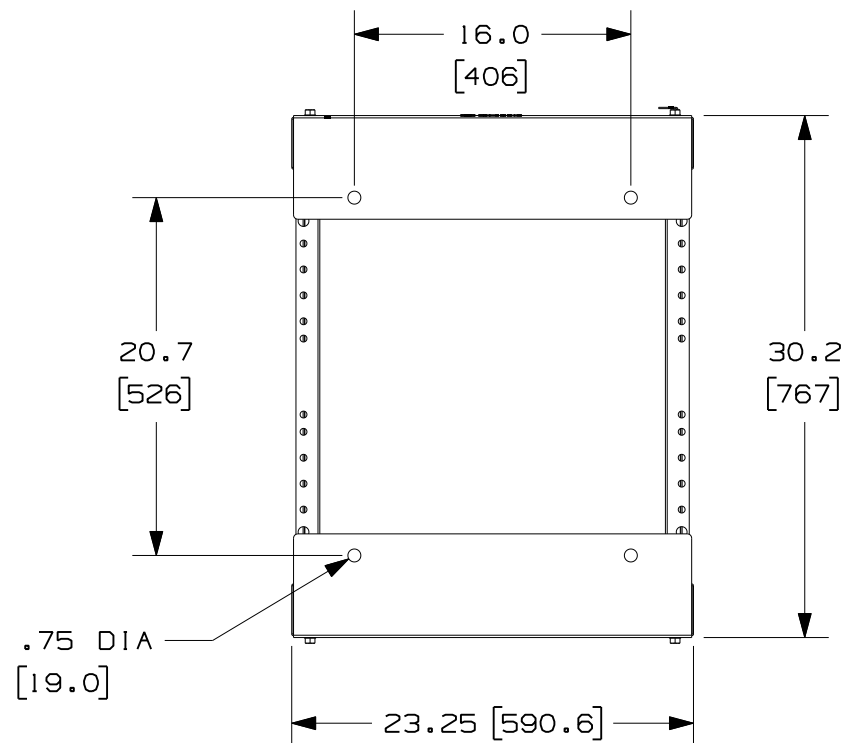


FLOOR FOOTPRINT WITH
BASE ANGLES TURNED INWARD

MODEL FILENAME		V10312AA/05	
CAD FILENAME/LAYERS		V10312AA_DC/05A	
PANDUIT CORP. TINLEY PARK, ILLINOIS			
4 POST RACK (CMR4P84CN) CUSTOMER DRAWING			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ± (.XXX) ± (.XX) ± ANGLES ±		UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.	
DRAWN BY LEE	MAT'L: STEEL	SCALE NONE	
DATE 2-21-06		DRAWING NO. 10312-16 SHEET 2 OF 3	DWG A SIZE
CHK'D BRAP			

05A	11-11-08	BAME	DPL	SEE SHEET 1 OF 3 FOR REVISIONS	10312-16				
04	12-17-07	TMW	TBW	SEE SHEET 1 OF 3 FOR REVISIONS	10312-16		KRKE		
REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP	OTH	

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

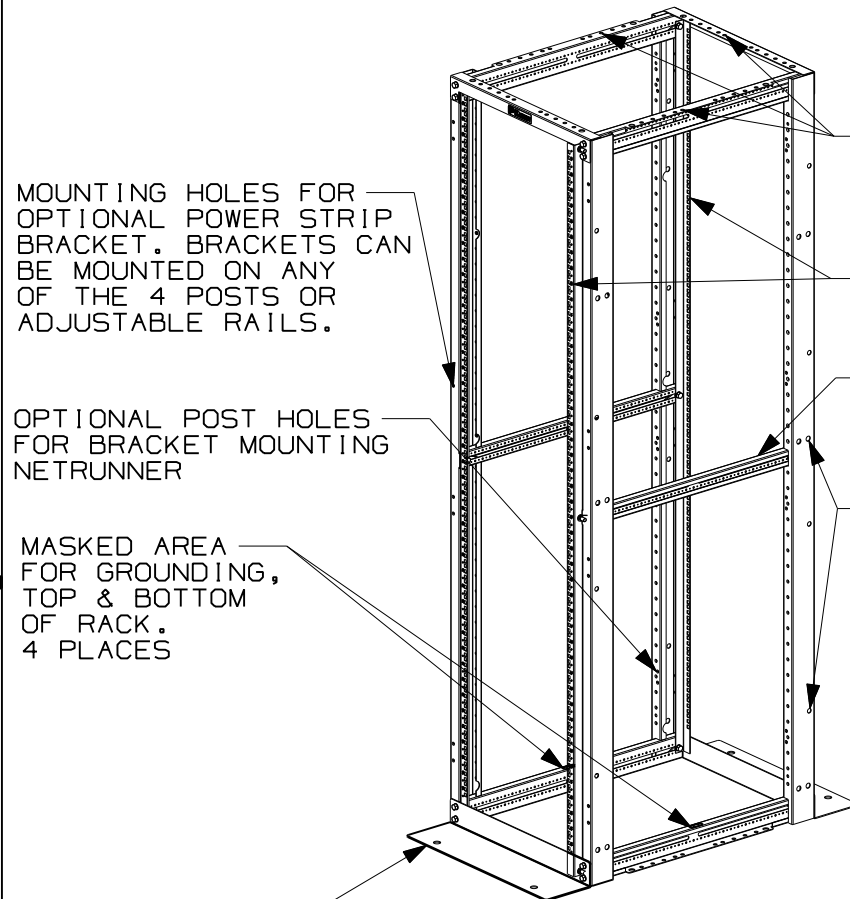


"J" BOLT MOUNTING HOLES FOR SECURING LADDER RACK PERPENDICULAR AND PARALLEL TO 4 POST RACK.

MOUNTING RAILS (ADJUSTABLE FROM 4" TO 30")

CROSS BEAMS ARE MARKED EVERY 1/2" FOR MOUNTING RAIL ALIGNMENT

MOUNTING HOLES FOR VERTICAL MANAGERS. DOUBLE HOLES ARE FOR MOUNTING PATCHRUNNER. SINGLE HOLES ARE FOR SIDE MOUNTING NETRUNNER.

RU SPACINGS ARE PRINTED ON MOUNTING RAILS

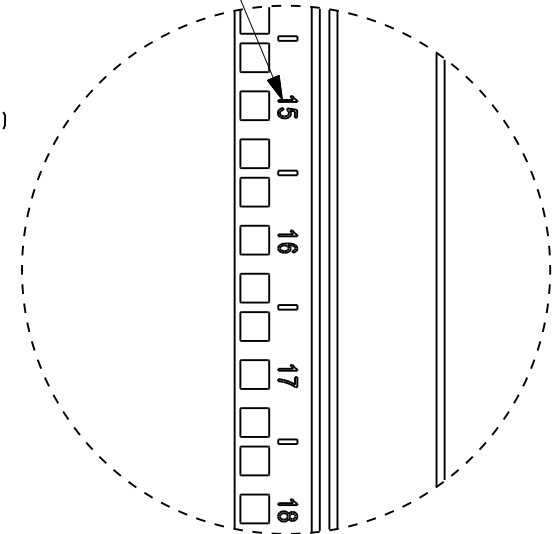

MODEL FILENAME		V10312AA/05	
CAD FILENAME/LAYERS		V10312AA_DC/05A	
PANDUIT CORP. TINLEY PARK, ILLINOIS			
4 POST RACK (CMR4P84CN) CUSTOMER DRAWING			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ± (.XX) ±		UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.	
DRAWN BY LEE		MAT'L: STEEL	
DATE 2-21-06		SCALE NONE	
CHK'D BRAP		DRAWING NO. 10312-16 SHEET 3 OF 3	
		DWG A SIZE	

05A	11-11-06	BAME	<i>DPH</i>	SEE SHEET 1 OF 3 FOR REVISIONS					
04	12-17-07	TMW	TBW	SEE SHEET 1 OF 3 FOR REVISIONS	10312-16		KRKE		
REV	DATE	BY	CHK	DESCRIPTION	ECN	- R	CUST	SUP	OTH