




# HIGH-DENSITY OPEN-PIN-FIELD ARRAYS

(1.27 mm) .050" PITCH

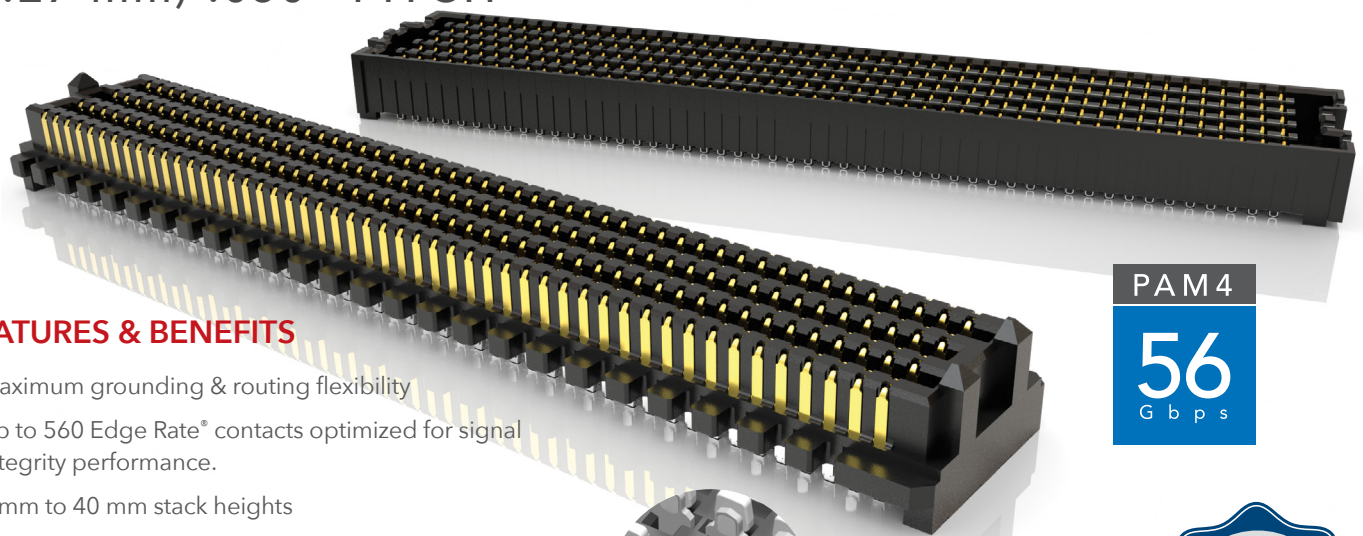


## FEATURES & BENEFITS


- Maximum grounding & routing flexibility
- Up to 560 Edge Rate® contacts optimized for signal integrity performance.
- 7 mm to 40 mm stack heights
- Variety of designs and options: Right-Angle, Guide Posts, 85  $\Omega$  Elevated Risers, 85  $\Omega$  Tuned, Press-Fit and Press-Fit Right-Angle, Guide Post Field Termination Kits
- Cable mates (SEAC Series) and Jack Screw Standoffs (JSO Series) also available
- Standards: VITA™ 47, VITA™ 57.1 FMC™, VITA™ 57.4 FMC™+, VITA™ 74 VNX™, PISMO™ 2
- Supports high-speed protocols such as Ethernet, PCI Express®, Fibre Channel & InfiniBand™
- Severe Environment Testing qualified (SEAM/SEAF); aligns with MIL-DTL-55302. Visit [samtec.com/set](http://samtec.com/set)

VITA/VNX/VNX+/FMC/FMC+/XMC/XMC+ are all respective trademarks of VITA PCI-SIG®.

The PCI Express® design marks are registered trademarks and/or service marks of PCI-SIG.



Solder Charges



(1.12 mm) .044"  
Nominal Wipe


**EDGE  
RATE®**  
CONTACT

PAM 4

**56**  
G b p s



## MAXIMUM GROUNDING & ROUTING FLEXIBILITY

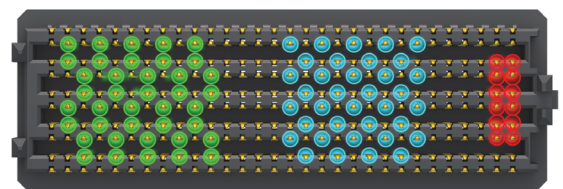

Differential Pair

Single-Ended

Power

| SERIES          | INSULATOR MATERIAL      | CONTACT MATERIAL                           | PLATING                                    | OPERATING TEMP RANGE | CURRENT RATING          | VOLTAGE RATING  | LEAD-FREE SOLDERABLE |
|-----------------|-------------------------|--------------------------------------------|--------------------------------------------|----------------------|-------------------------|-----------------|----------------------|
| SEAM/SEAF       | Black LCP               | Copper Alloy                               | Au or Sn over 50 $\mu$ " (1.27 $\mu$ m) Ni | -55 °C to +125 °C    | 2.7 A (10 pins powered) | 240 VAC/339 VDC | Yes                  |
| SEAM-RA/SEAF-RA | Black LCP               | Copper Alloy                               | Au or Sn over 50 $\mu$ " (1.27 $\mu$ m) Ni | -55 °C to +125 °C    | 1.9 A (10 pins powered) | 240 VAC/339 VDC | Yes                  |
| SEAM-GP         | Black LCP               | Copper Alloy                               | Au or Sn over 50 $\mu$ " (1.27 $\mu$ m) Ni | -55 °C to +125 °C    | 2.7 A (10 pins powered) | 240 VAC/339 VDC | Yes                  |
| SEAMP/SEAFP     | Natural High Temp Nylon | Copper Alloy (SEAMP)<br>BeCu Alloy (SEAFP) | Au or Sn over 50 $\mu$ " (1.27 $\mu$ m) Ni | -55 °C to +125 °C    | 1.9 A (6 pins powered)  | 255 VAC/361 VDC | Not Available        |
| SEAR            | Black LCP               | Hard Gold Plated                           | Au over 50 $\mu$ " (1.27 $\mu$ m) Ni       | -55 °C to +125 °C    | 1.4 A (20 pins powered) | 240 VAC/339 VDC | Not Available        |
| SEAMI           | Black LCP               | Copper Alloy                               | Au or Sn over 50 $\mu$ " (1.27 $\mu$ m) Ni | -55 °C to +125 °C    | Not Available           | Not Available   | Yes                  |

**Note:** Some lengths, styles and options are non-standard, non-returnable

# (1.27 mm) .050" PITCH • SEAM/SEAF SERIES

| SERIES           | POSITIONS PER ROW                                                                          | LEAD STYLE                    | PLATING OPTION                                                                                                                                                   | NO. OF ROWS                                         | SOLDER TYPE                                 | A                                                                                                      | K                     | "X" R |
|------------------|--------------------------------------------------------------------------------------------|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|---------------------------------------------|--------------------------------------------------------------------------------------------------------|-----------------------|-------|
| SEAM<br>Terminal | -10, -15, -20, -30, -40, -50                                                               | Specify LEAD STYLE from chart | -L<br>= 10 μ" (0.25 μm)<br>Gold on contact area, Matte Tin on solder tail                                                                                        | -04<br>-05<br>-06<br>-08<br>-10                     | -1<br>= Tin/<br>Lead Alloy<br>Solder Charge |                                                                                                        | -A<br>= Alignment Pin |       |
| SEAF<br>Socket   | SEAM & SEAF: -10 only available in -04 Row with any Lead Style                             |                               | -S<br>= 30 μ" (0.76 μm)<br>Gold on contact area, Matte Tin on solder tail                                                                                        | -2<br>= Lead-Free Solder Charge                     |                                             | -K<br>Polyimide Film Pick & Place Pad                                                                  |                       |       |
|                  | SEAM: -15 only available in -04 Row with -02.0 Lead Style, and -10 Row with any Lead Style |                               | -STL<br>= 30 μ" (0.76 μm)<br>Gold on contact area, Tin/Lead on solder tail                                                                                       | (SEAM -05 Rows not available with -06.5 Lead Style) |                                             | -TR<br>= Tape & Reel                                                                                   |                       |       |
|                  | SEAF: -15 only available in -04 or -10 Row with -5.0 Lead Style                            |                               | -P<br>= SureCoat™<br>3 μ" (0.07 μm) Gold Flash and 30 μ" (0.76 μm) Palladium Nickel on contact area, Matte Tin on solder tail (-02.0 and -05.0 Lead Styles only) |                                                     |                                             | -FR<br>= Full Reel Tape & Reel (must order max. quantity per reel; contact Samtec for quantity breaks) |                       |       |

SEAM

Board Mates:  
SEAF, SEAFP

Standoffs:  
JSO

New!

SureCoat™

Palladium Nickel

Plating Option!

| LEAD STYLE | A            |
|------------|--------------|
| -02.0      | (5.61) .221  |
| -03.0      | (6.60) .260  |
| -03.5      | (7.11) .280  |
| -06.5      | (10.16) .400 |
| -07.0      | (10.59) .417 |
| -09.0      | (12.60) .496 |
| -11.0      | (14.61) .575 |

ALSO AVAILABLE


See website for 14 row option.

View complete specifications at: [samtec.com?SEAM](http://samtec.com?SEAM)

No. of positions x (1.27) .050 + (4.98) .196

No. of positions x (1.27) .050 + (3.58) .141

**SEAM**  
Board Mates:  
SEAF, SEAFP  
Standoffs:  
JSO





## ALSO AVAILABLE

See website for 14 row option.

View complete specifications at: [samtec.com?SEAM](http://samtec.com?SEAM)

**SEAF**  
Board Mates:  
SEAM, SEAMP,  
SEAR, SEAMI  
Standoffs:  
JSO



View complete specifications at: [samtec.com?SEAF](http://samtec.com?SEAF)

| LEAD STYLE | A           | NO. OF ROWS | B            |
|------------|-------------|-------------|--------------|
| -05.0      | (5.05) .199 | -04         | (5.66) .223  |
| -06.0      | (6.05) .238 | -05, -06    | (8.20) .323  |
| -06.5      | (6.55) .258 | -08         | (10.74) .423 |
| -07.5      | (7.54) .297 | -10         | (13.28) .523 |

## STANDARDS

VITA 47  
VITA 57.1 FMC  
VITA 57.4 FMC+  
VITA 74 VNX  
PISMO™ 2

Visit [www.samtec.com/standards](http://www.samtec.com/standards)  
for more information.

**Notes:**  
IPC-A-610F and  
IPC J-STD-001F Class 3 solder joint.

Severe Environment Testing qualified; aligns  
with MIL-DTL-55302. Visit [samtec.com/set](http://samtec.com/set)

| MATED HEIGHTS   |                 |         |         |         |
|-----------------|-----------------|---------|---------|---------|
| SEAM LEAD STYLE | SEAF LEAD STYLE |         |         |         |
|                 | -05.0           | -06.0   | -06.5   | -07.5   |
| -02.0           | 7 mm            | 8 mm    | 8.5 mm  | 9.5 mm  |
| -03.0           | 8 mm            | 9 mm    | 9.5 mm  | 10.5 mm |
| -03.5           | 8.5 mm          | 9.5 mm  | 10 mm   | 11 mm   |
| -06.5           | 11.5 mm         | 12.5 mm | 13 mm   | 14 mm   |
| -07.0           | 12 mm           | 13 mm   | 13.5 mm | 14.5 mm |
| -09.0           | 14 mm           | 15 mm   | 15.5 mm | 16.5 mm |
| -11.0           | 16 mm           | 17 mm   | 17.5 mm | 18.5 mm |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Samtec:](#)

[SEAM-20-03.5-S-10-2-A-K-TR](#) [SEAM-30-02.0-S-06-2-A-K-TR](#) [SEAM-50-02.0-S-08-2-A-K-TR](#) [SEAM-20-03.5-S-08-2-A-K-TR](#) [SEAM-20-07.0-S-08-2-A-K-TR](#) [SEAM-50-02.0-L-10-2-A-K-TR](#) [SEAM-50-02.0-L-10-2-A-GP-K-TR](#) [SEAM-20-11.0-S-06-2-A-K-TR](#) [SEAM-30-02.0-L-06-2-A-K-TR](#) [SEAM-50-11.0-S-06-2-A-K-TR](#) [SEAM-40-06.5-S-10-1-A-K-TR](#) [SEAM-40-02.0-S-04-2-A-K-TR](#) [SEAM-30-02.0-L-04-2-A-K-TR](#) [SEAM-40-07.0-S-10-2-A-K-TR](#) [SEAM-50-02.0-S-04-1-A-GP-K-TR](#) [SEAM-20-02.0-L-08-2-A-K-TR](#) [SEAM-50-02.0-L-04-2-A-GP-K-TR](#) [SEAM-50-03.0-S-08-2-A-K-TR](#) [SEAM-30-02.0-S-08-2-A-K-TR](#) [SEAM-40-02.0-L-04-2-A-K-TR](#) [SEAM-40-02.0-L-04-2-A-GP-K-TR](#) [SEAM-20-02.0-L-04-2-A-GP-K-TR](#) [SEAM-30-02.0-L-04-2-A-GP-K-TR](#) [SEAM-50-02.0-S-10-2-A-K-TR](#) [SEAM-30-11.0-L-06-2-A-K-TR](#) [SEAM-20-11.0-S-08-2-A-K-TR](#) [SEAM-20-02.0-S-04-2-A-K-TR](#) [SEAM-10-03.5-L-04-2-A-K-TR](#) [SEAM-40-03.0-L-10-2-A-K-TR](#) [SEAM-40-06.5-L-10-2-A-K-TR](#) [SEAM-40-03.5-L-10-2-A-K-TR](#) [SEAM-20-02.0-S-06-2-A-K-TR](#) [SEAM-20-02.0-L-04-2-A-K-TR](#) [SEAM-30-03.5-S-10-2-A-K-TR](#) [SEAM-40-02.0-L-06-2-A-GP-K-TR](#) [SEAM-40-09.0-S-10-2-A-K-TR](#) [SEAM-20-03.0-S-08-2-A-K-TR](#) [SEAM-40-11.0-S-10-1-A-K-TR](#) [SEAM-30-03.5-S-06-2-A-K-TR](#) [SEAM-40-02.0-S-10-2-A-GP-K-TR](#) [SEAM-50-11.0-S-10-2-A-K-TR](#) [SEAM-40-02.0-L-06-2-A-K-TR](#) [SEAM-40-02.0-L-10-1-A-K-TR](#) [SEAM-40-11.0-S-08-2-A-K-TR](#) [SEAM-20-11.0-L-10-2-A-K-TR](#) [SEAM-30-02.0-S-08-1-A-K-TR](#) [SEAM-20-03.5-S-06-2-A-K-TR](#) [SEAM-40-02.0-S-10-2-A-K-TR](#) [SEAM-30-03.5-S-04-2-A-K-TR](#) [SEAM-40-03.5-S-06-2-A-K-TR](#) [SEAM-20-02.0-S-10-1-A-K-TR](#) [SEAM-30-02.0-L-08-2-A-K-TR](#) [SEAM-30-11.0-S-04-2-A-K-TR](#) [SEAM-50-02.0-S-08-1-A-K-TR](#) [SEAM-40-11.0-L-10-2-A-K-TR](#) [SEAM-20-02.0-S-04-1-A-K-TR](#) [SEAM-30-03.5-L-08-2-A-K-TR](#) [SEAM-30-02.0-S-06-1-A-K-TR](#) [SEAM-40-03.5-S-08-2-A-K-TR](#) [SEAM-40-06.5-S-10-2-A-K-TR](#) [SEAM-20-03.5-L-08-2-A-K-TR](#) [SEAM-40-11.0-L-06-2-A-K-TR](#) [SEAM-30-11.0-S-10-2-A-K-TR](#) [SEAM-30-03.0-S-06-2-A-K-TR](#) [SEAM-50-02.0-L-08-1-A-K-TR](#) [SEAM-10-02.0-S-04-1-A-K-TR](#) [SEAM-20-07.0-S-04-2-A-K-TR](#) [SEAM-20-11.0-S-10-2-A-K-TR](#) [SEAM-50-02.0-L-06-2-A-GP-K-TR](#) [SEAM-20-02.0-L-06-2-A-K-TR](#) [SEAM-10-02.0-L-04-1-A-K-TR](#) [SEAM-50-02.0-S-04-2-A-K-TR](#) [SEAM-40-03.0-S-04-2-A-K-TR](#) [SEAM-20-03.0-S-04-2-A-K-TR](#) [SEAM-50-11.0-S-08-2-A-K-TR](#) [SEAM-30-02.0-S-04-2-A-K-TR](#) [SEAM-40-02.0-S-08-2-A-K-TR](#) [SEAM-30-03.5-L-06-2-A-K-TR](#) [SEAM-30-07.0-S-08-2-A-K-TR](#) [SEAM-50-03.5-S-08-2-A-K-TR](#) [SEAM-40-03.0-S-06-2-A-K-TR](#) [SEAM-20-11.0-L-04-2-A-K-TR](#) [SEAM-20-02.0-S-08-2-A-K-TR](#) [SEAM-40-11.0-S-06-2-A-K-TR](#) [SEAM-40-02.0-L-10-2-A-K-TR](#) [SEAM-30-03.5-S-08-2-A-K-TR](#) [SEAM-30-03.5-L-04-2-A-K-TR](#) [SEAM-50-02.0-L-08-2-A-K-TR](#) [SEAM-30-02.0-S-10-2-A-K-TR](#) [SEAM-40-02.0-L-10-2-A-GP-K-TR](#) [SEAM-40-02.0-S-08-1-A-K-TR](#) [SEAM-50-11.0-L-10-2-A-K-TR](#) [SEAM-50-02.0-L-06-2-A-K-TR](#) [SEAM-40-07.0-S-06-2-A-K-TR](#) [SEAM-50-03.0-S-10-2-A-K-TR](#) [SEAM-50-07.0-S-08-2-A-K-TR](#) [SEAM-40-](#)