

# Product data sheet

Specifications



## Programmable receiver - 2 relays - 24..240 V AC/DC - 2 pusbuttons - 6 LEDs

ZBRRA

**Product availability: Stock - Normally stocked in distribution facility**

### Main

|                              |                                       |
|------------------------------|---------------------------------------|
| Range of Product             | Harmony                               |
| Product or Component Type    | Programmable receiver                 |
| Device short name            | ZBRRA                                 |
| Product Specific Application | Interface to actuators                |
| Function of module           | Bi-stable<br>Monostable<br>Stop/start |
| Reset time                   | 2 ms time delay                       |
| Transmission frequency       | 2405 MHz                              |
| emission class               | 5M00G7W                               |
| Antenna type                 | Omnidirectional                       |

### Complementary

|                             |  |
|-----------------------------|--|
| Nominal output current      | 0.3 A 48 V DC IEC 60947-5-1<br>3 A 24 V DC UL 508<br>1.5 A 240 V AC IEC 60947-5-1<br>3 A 120 V AC IEC 60947-5-1<br>3 A 240 V AC UL 508<br>3 A 24 V DC CSA C22.2 No 14<br>3 A 240 V AC CSA C22.2 No 14                            |
| Output Type                 | 2 relays   |
| Output contacts             | 2 C/O  |
| Input output isolation      | Galvanic isolation   |
| Time delay range            | 0.5 s - 15...15 %)   |
| Switching capacity in VA    | 1250 VA  |
| Maximum switching current   | 5 mA AC/DC   |
| Maximum switching voltage   | 250 V AC/DC  |
| [Us] Rated Supply Voltage   | 24...240 V AC/DC 50/60 Hz - 10...10 %  |
| Communication port protocol | Zigbee green power 2.4 GHz IEEE 802.15.4   |
| Maximum sensing distance    | 328.08 ft (100 m) in free field<br>82.02 ft (25 m) transmitter in a plastic box type XAL D and receiver in a metal enclosure<br>131.2 ft (40 m) transmitter in box type XAL D, receiver in metal enclosure and use relay-antenna |
| Response Time               | < 30 ms after transmitter clicks   |
| Utilisation category        | AC-15 : B300 IEC 60947-5-1<br>DC-12 IEC 60947-5-1  |

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

|   |  |
|---|--|
| <b>Maximum power consumption in W</b>                         | 4 W AC/DC  |
| <b>Breaking capacity</b>                                      | 15 W   |
| <b>Breaking capacity</b>                                      | 750 VA   |
| <b>Control circuit frequency</b>                              | 50...60 Hz +/- 10 %  |
| <b>Short-circuit protection</b>                               | 0.4 A fuse fast blow   |
| <b>Operating position</b>                                     | Any position without derating  |
| <b>Electrical connection</b>                                  | 1 conductor cable 0.0002...0.004 in <sup>2</sup> (0.14...2.5 mm <sup>2</sup> ) - AWG 26...AWG 14 - solid - without cable end IEC 60947-1<br>2 conductors cable 0.0002...0.002 in <sup>2</sup> (0.14...1.5 mm <sup>2</sup> ) - AWG 26...AWG 16 - solid - without cable end IEC 60947-1<br>1 conductor cable 0.0002...0.006 in <sup>2</sup> (0.14...4 mm <sup>2</sup> ) - AWG 26...AWG 12 - flexible - with cable end IEC 60947-1<br>2 conductors cable 0.0002...0.002 in <sup>2</sup> (0.14...1.5 mm <sup>2</sup> ) - AWG 26...AWG 16 - flexible - with cable end IEC 60947-1 |
| <b>Tightening torque</b>                                      | 4.4...8.9 lbf.in (0.5...1 N.m) IEC 60947-1   |
| <b>Housing material</b>                                       | Self-extinguishing plastic   |
| <b>Status LED</b>   | 1 LED Green power ON<br>2 LEDs Green relay ON<br>2 LEDs Green function mode<br>1 LED green and yellow reception signal   |
| <b>Mounting support</b>                                       | 35 mm symmetrical DIN rail conforming to IEC 60715<br>Mounting plate   |
| <b>Rated short-duration power frequency withstand voltage</b> | 1.5 kV 50 Hz IEC 60947-5-1   |
| <b>[Uimp] rated impulse withstand voltage</b>                 | 4 kV   |
| <b>Surge withstand</b>  | 1 kV differential mode IEC 61000-4-5<br>2 kV common mode IEC 61000-4-5   |
| <b>Max power consumption in W</b>                             | 1 mW   |
| <b>Number of channels</b>                                     | 1  |
| <b>Modulation technique</b>                                   | O-QPSK   |
| <b>Bandwidth</b>  | 5 MHz  |
| <b>Antenna gain</b>   | 0 dBi  |
| <b>Width</b>  | 1.4 in (36 mm)   |
| <b>Height</b>   | 4.3 in (108 mm)  |
| <b>Depth</b>  | 3.0 in (75 mm)   |
| <b>Net Weight</b>   | 0.29 lb(US) (0.13 kg)  |

## Environment

|                               |   |
|-------------------------------|---|
| <b>Standards</b>              | CSA C22.2 No 14<br>UL 508<br>IEC 60947-5-1<br>IEC 60947-1 |
| <b>Radio agreement</b>        | RSS<br>SRRC<br>ANATEL<br>ARIB T66<br>FCC<br>ICASA         |
| <b>Product Certifications</b> | C-tick<br>CCC<br>CSA<br>UL<br>GOST                        |

|  |   |
|--|---|
| <b>Marking</b>                             | CE  |
| <b>Ambient Air Temperature for Storage</b> | -40...158 °F (-40...70 °C)  |
| <b>Relative humidity</b>                   | 90 % -4...131 °F (-20...55 °C), without condensation ETSI EN 300 440-1  |
| <b>Vibration resistance</b>                | +/- 7.5 mm (f= 5...14 Hz) conforming to IEC 60068-2-6<br>2 gn (f= 8...150 Hz) conforming to IEC 60068-2-6   |
| <b>Shock resistance</b>                    | 10 gn 16 ms) 6000 shocks IEC 60068-2-27   |
| <b>IP degree of protection</b>             | IP20 IEC 60529 casing)<br>IP20 terminals)   |
| <b>Pollution degree</b>                    | 2 IEC 60664-1   |
| <b>Overvoltage category</b>                | II conforming to IEC 60664-1  |
| <b>Insulation resistance</b>               | > 500 MOhm 500 V DC NF C 20-030   |
| <b>[Ui] rated insulation voltage</b>       | 250 V IEC 60664-1   |
| <b>Electromagnetic compatibility</b>       | Immunity for industrial environments conforming to IEC 61000-6-2<br>Conducted and radiated emissions class B conforming to CISPR 22<br>Electrostatic discharge immunity test - test level: 8 kV (in free air (in insulating parts)) conforming to IEC 61000-4-2<br>Electrostatic discharge immunity test - test level: 6 kV (on contact (on metal parts)) conforming to IEC 61000-4-2<br>Susceptibility to electromagnetic fields - test level: 10 V/m (80...2000 MHz) conforming to IEC 61000-4-3<br>Susceptibility to electromagnetic fields - test level: 3 V/m (80...2700 MHz, distance = 20 m) conforming to IEC 61000-4-3<br>Electrical fast transient/burst immunity test - test level: 2 kV (relay wires) conforming to IEC 61000-4-4<br>Electrical fast transient/burst immunity test - test level: 2 kV (power supply wires) conforming to IEC 61000-4-4<br>1.2/50 µs shock waves immunity test - test level: 1 kV (differential mode) conforming to IEC 61000-4-5<br>1.2/50 µs shock waves immunity test - test level: 2 kV (common mode) conforming to IEC 61000-4-5<br>Conducted RF disturbances - test level: 10 V conforming to IEC 61000-4-6<br>Immunity to microbreaks and voltage drops - test level: 10 ms conforming to IEC 61000-4-11<br>Radiated emission conforming to ETSI EN 300 440-1<br>Conducted emission conforming to EN 300-489-1<br>Conducted emission conforming to ETSI EN 300 489-3<br>Radiated emission conforming to ETSI EN 300 440-2 |
| <b>Electrical durability</b>               | 100000 cycles   |
| <b>Mechanical durability</b>               | 1000000 cycles  |

## Ordering and shipping details

|                          |               |
|--------------------------|---------------|
| <b>Category</b>          | US1000I22470  |
| <b>Discount Schedule</b> | 000I          |
| <b>GTIN</b>              | 3606480334702 |
| <b>Returnability</b>     | Yes           |
| <b>Country of origin</b> | US            |

## Packing Units

|                                     |                  |
|-------------------------------------|------------------|
| <b>Unit Type of Package 1</b>       | PCE              |
| <b>Number of Units in Package 1</b> | 1                |
| <b>Package 1 Height</b>             | 1.81 in (4.6 cm) |
| <b>Package 1 Width</b>              | 3.15 in (8 cm)   |
| <b>Package 1 Length</b>             | 3.78 in (9.6 cm) |
| <b>Package 1 Weight</b>             | 4.9 oz (138 g)   |

|                                     |                          |
|-------------------------------------|--------------------------|
| <b>Unit Type of Package 2</b>       | S03                      |
| <b>Number of Units in Package 2</b> | 64                       |
| <b>Package 2 Height</b>             | 11.81 in (30 cm)         |
| <b>Package 2 Width</b>              | 11.81 in (30 cm)         |
| <b>Package 2 Length</b>             | 15.75 in (40 cm)         |
| <b>Package 2 Weight</b>             | 20.898 lb(US) (9.479 kg) |

## Contractual warranty

|                 |           |
|-----------------|-----------|
| <b>Warranty</b> | 18 months |
|-----------------|-----------|



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

|  |    |
|--|----|
| Carbon footprint (kg CO2 eq, Total Life cycle) | 32 |
|--|----|

## Use Better

### Materials and Substances

|  |    |
|--|----|
| Packaging made with recycled cardboard | No |
|--|----|

|                                      |    |
|--------------------------------------|----|
| Packaging without single use plastic | No |
|--------------------------------------|----|

|                                   |  |
|-----------------------------------|--|
| <a href="#">EU RoHS Directive</a> | Pro-active compliance (Product out of EU RoHS legal scope) |
|-----------------------------------|--|

|             |                                      |
|-------------|--------------------------------------|
| SCIP Number | 25b7f895-3732-43c8-9910-ef6005058640 |
|-------------|--------------------------------------|

|                  |                                   |
|------------------|-----------------------------------|
| REACH Regulation | <a href="#">REACH Declaration</a> |
|------------------|-----------------------------------|

|                           |  |
|---------------------------|--|
| California proposition 65 | <b>WARNING:</b> This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> |
|---------------------------|--|

## Use Again

### Repack and remanufacture

|                     |   |
|---------------------|---|
| Circularity Profile | <a href="#">End of Life Information</a> |
|---------------------|---|


|           |    |
|-----------|----|
| Take-back | No |
|-----------|----|

|      |  |
|------|--|
| WEEE |  The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins. |
|------|--|

Dimensions Drawings

Programmable Receiver


---

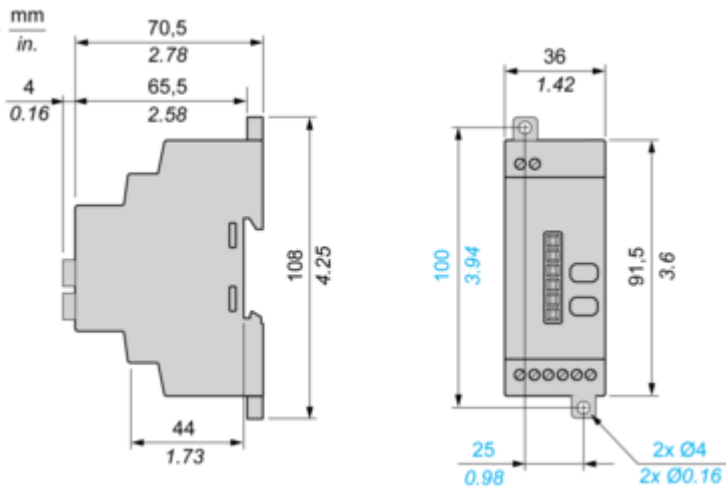

## Mounting and Clearance

### Receiver Clearance


---

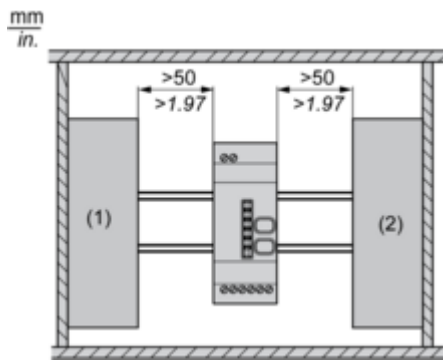

- (1) Drive
- (2) Power Supply or PLC

Receiver Mounting


---

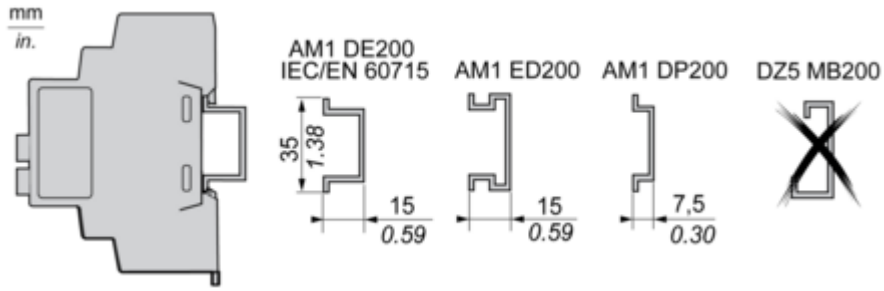

Connections and Schema

Programmable Receiver



---

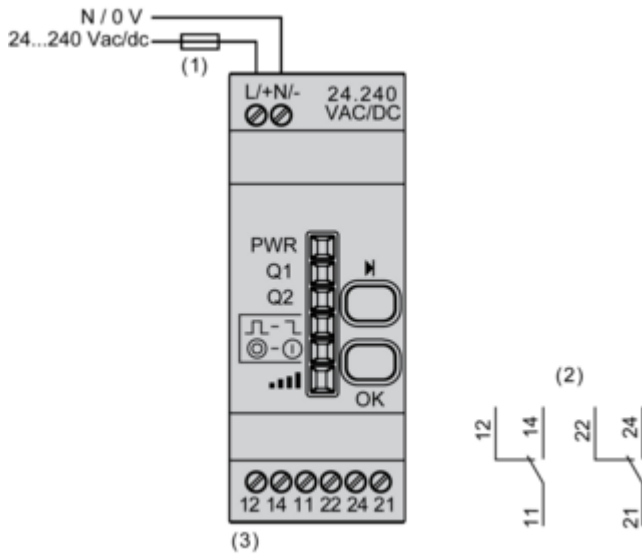


- (1) 500 mA
- (2) Output contacts
- (3)  $I_{max} = 3 A$

Technical Illustration


Dimensions

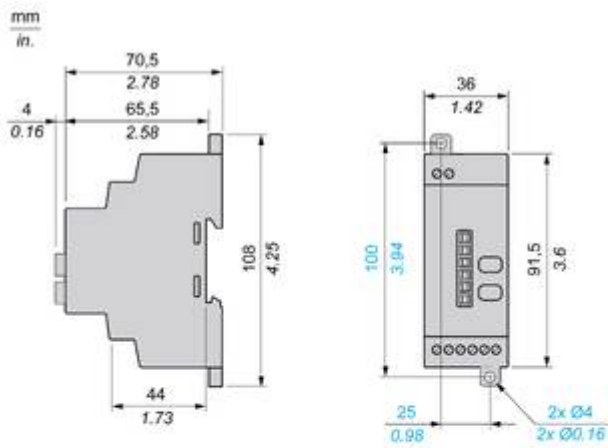


AM1 DE200  
IEC/EN 60715



AM1 ED200



AM1 DP200



DZ5 MB200



Technical Illustration

Wiring diagram

---

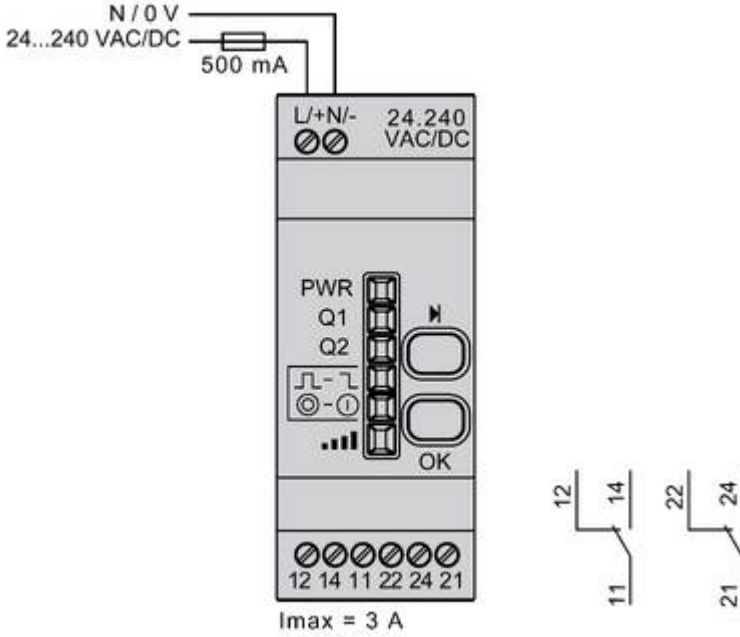


Image of product / Alternate images

Alternative

---

