

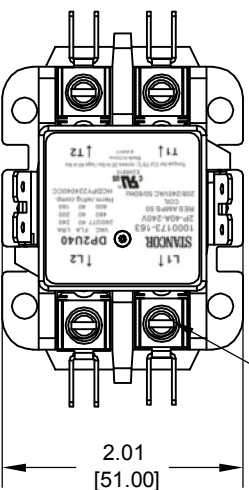
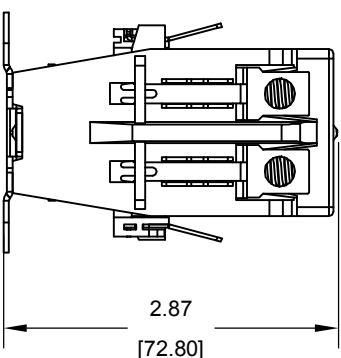


COIL DATA	NOTES: UNLESS OTHERWISE SPECIFIED	
COIL 208/240VAC 50/60HZ		
1868 OHM 180 VAC OPERATE		
38.4-163 VAC DROPOUT		
26.8 VA INRUSH 5.4 VA SEAL		
MAX VOLTAGE 264 VAC		

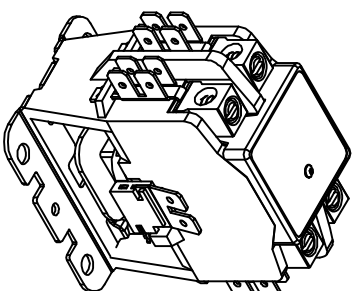

2.76
[70.0]

2.76
[70.0]

STANCOR
Definite Purpose Contactor

Enclosure: OPEN

Power Poles: 2

Amp Rating: FLA 40 RES 50

Coil Voltage: 208/240VAC 50/60Hz

DP2U40

HCDP/224040CC
B W W W Y
Made in China

1000173-163
2P-40A-240V

L1 ↑
STANCOR
 10001773-163
 2P-40A-240V
 RESAMPS 50
 COIL
 208/240VAC 50/60Hz
 C248810
Malis
 Torque for CU 7°C, serving 2D in 1µgs 40 in lbs
 Made in China
 BATTERY
T1 ↓

L2 ↑
DP2U40
 VAC. FLA. IFA
 240/277 40 240
 480 40 200
 240 40 160
 Heron left/g comp.
 HODPY 224040CC
T2 ↓

[illegible]